
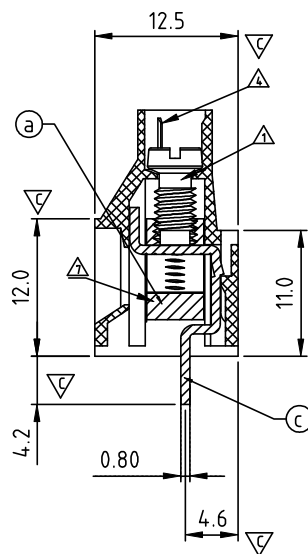
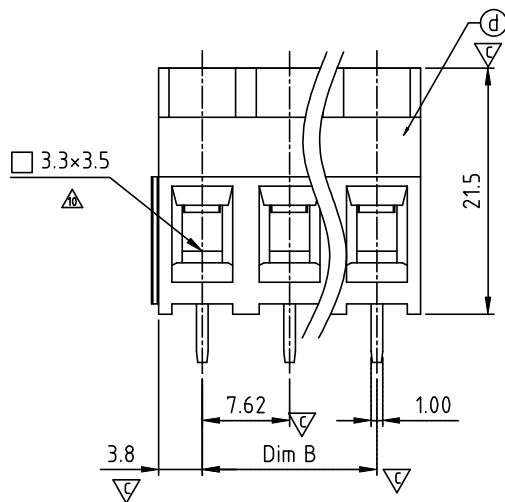
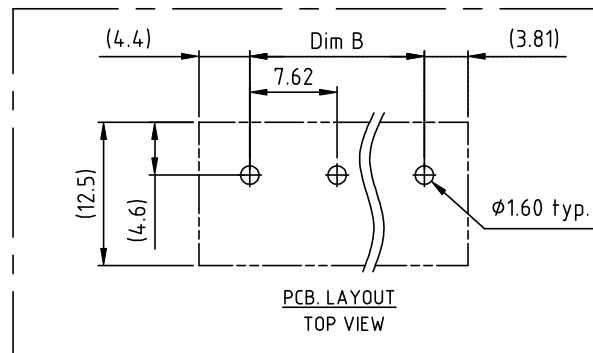


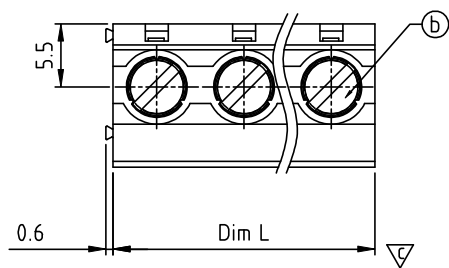

Material

- Item ⑤ Clamp : Brass, Ni plated
- Item ⑥ Terminal screw: Steel Zinc plating "-" slot type
- △ Item ⑦ Wire guard solder pin : Copper, Tin plated
- Item ⑧ Terminal housing : Thermoplastic (UL94V-0)

- | | | |
|----------------------------|-----------------|-------------------------|
| △ Electrical | cULus | TUV |
| ● Voltage rating: | 300VAC | 750VAC |
| △ ● Current rating: | 30A | 41A |
| ● Wire range: | | 0.20-6.0mm ² |
| △ ● Solid wire(AWG): | 10-24 | |
| △ ● Stranded wire(AWG): | 10-24 | |
| △ △ ● Torque(Lb-In): | 6.9 | 0.85 N.m |
| △ ● Screw: | M3.5 | |
| ● Wire strip length: | 6-7mm | |
| ● Withstanding Voltage: | 1.6KV | 3.0KV |
| △ ● Operating temperature: | -40°C to +115°C | |
| △ ● Soldering temperature: | 260°C±5°C/5 Sec | |
| ● Safety Approval: | FM | 789 |
| ● Critical dimension: | | |

DIMENSION

N = Number of poles

Dim L	Nx7.62
Dim B	(N-1)x7.62

Poles	Tolerance
2p-6p	±0.15
7p-11p	±0.25
12p-16p	±0.35

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ± 0.50

.X ± 0.30

.XX ± 0.10

.XXX ±

ANG ± 1°

PPOJECTION

照片框

ORDER INFORMATION

TBHO76-D21-xx-LF

SERIES

LEADFREE

02-16 WAY

HIGH 21.5mm

DIP 180°

DESCRIPTION: