


N=Number of contacts

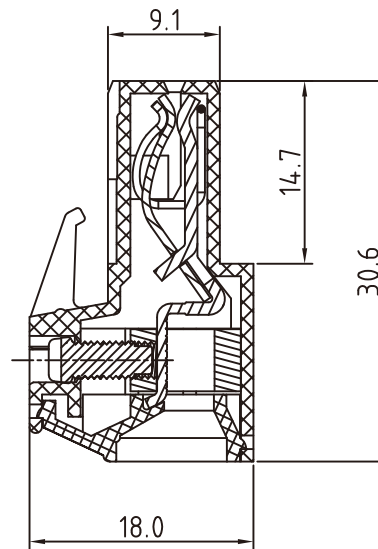

Material

- Terminal body(Contact pin) : Brass(CuZn)
- Terminal screw: SteelZinc plating"-slot type
- Wire guard : PhBz(CuSn)
- Spring: Stainless
- Insulator (housing): Thermoplastic (UL94V-0)

Electrical

cULus

- Voltage rating: 300V
- Current rating: 20A
- Wire range:
- Solid wire(AWG): 10-24
- Stranded wire(AWG): 10-24
- Torque(Lb-In): 3.5
- Screw: M3
- Wire strip length: 7-8mm
- Withstanding Voltage: 1.6KV
- Operating temperature: -30°C to +105°C

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS


UNIT/mm SCALE 1:1

DATE

SIZE A4

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

PPOJECTION



ORDER INFORMATION

TBH076-SWC-xx-LF

SERIES | | | LEADFREE
| | | 02~24WAY
| | | CAGE
| | | SCREW WIRE
| | | FEMALE

DESCRIPTION: