
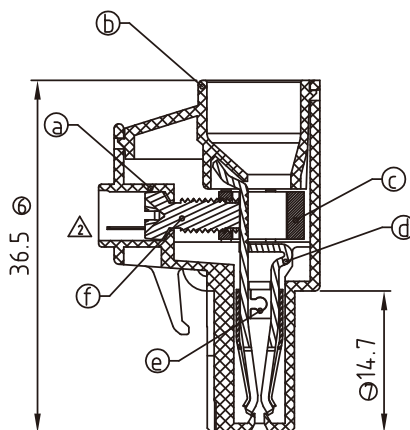
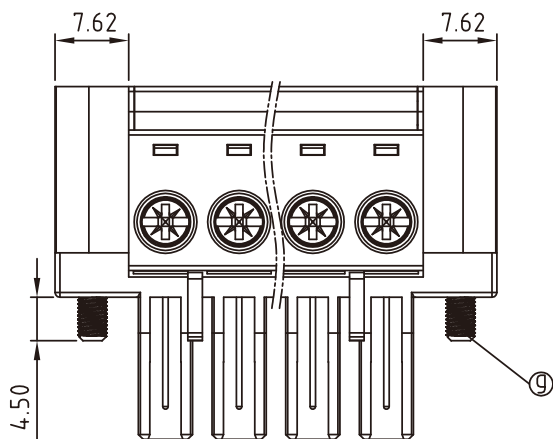


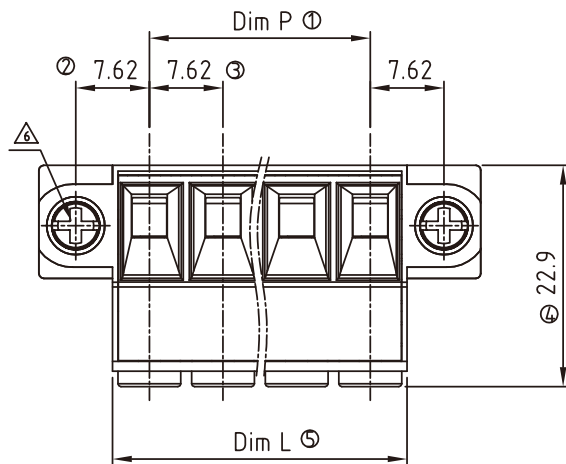

Material:

- Item ① Terminal(housing): Thermoplastic (UL94V-0)
- Item ② Terminal(cover): Thermoplastic (UL94V-0)
- Item ③ Clamp: Brass Ni plated
- ▲ Item ④ Female contact : Copper. Tin plated
- Item ⑤ Wire guard: Stainless steel
- Item ⑥ Terminal Screw: Steel zinc plated.
- ▲ Item ⑦ With flange Screw: Steel Zinc plating M3"/+/-" slot type
- ▲ Electrical: UL
- Voltage rating: 300 V
- Current rating: 32 A
- Wire range: ⑨
- Solid wire(AWG): 8-24
- Stranded wire(AWG): 8-24
- Torque: 7 LB-In
- Screw: M3.5
- Wire strip length: 10-11 mm
- Withstanding Voltage: 1.6KV
- Operating temperature: -40°C to +115°C

POLE		2	3	4	5	6	7	8
Dim L		15.24	22.86	30.48	38.10	45.72	53.34	60.96
Dim P		7.62	15.24	22.86	30.48	38.10	45.72	53.34
Tol.	±0.15				±0.20			
POLE	9	10	11	12	13	14	15	16
Dim L	68.58	76.20	83.82	91.44	99.06	106.68	114.30	121.92
Dim P	60.96	68.58	76.20	83.82	91.44	99.06	106.68	114.30
Tol.	±0.30				±0.40			

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.30
.XX ± 0.20
.XXX ± 0.10
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

TBH076-SWCF36-xx-LF

SERIES
LEADFREE
02~16WAY
LONG 36.5mm
FLANGE
CAGE
SCREW WIRE
FEMALE

DESCRIPTION: