
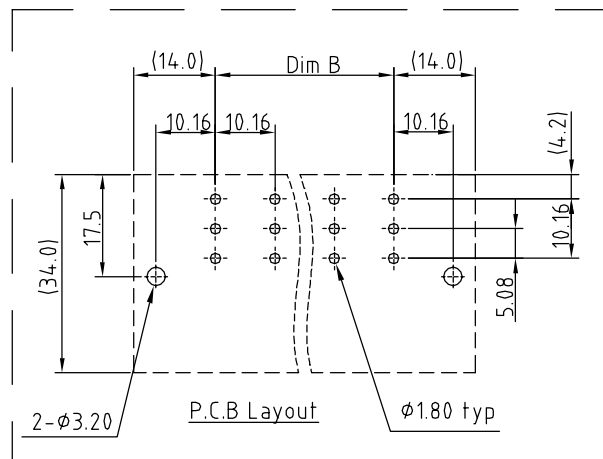



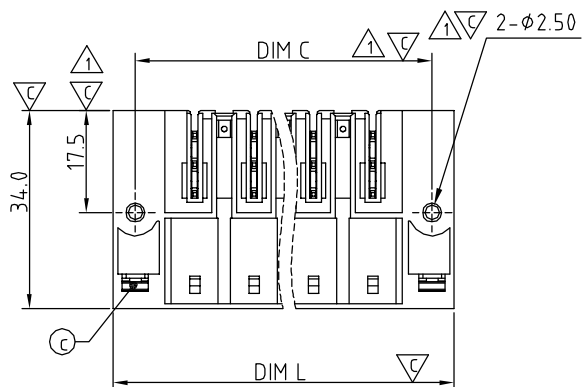


Material:

- Item a Terminal(housing): Thermoplastic,UL 94 - V0.
- Item b Male contact pin: Copper Gold plated
- Item c With flange nut : Steel zinc plated M3

Electrical: cULus / IEC

- Voltage rating: 300V / 1000V
- Current rating: 55A / 76A
- Withstanding Voltage: 1.6 KV / 8 KV
- Operating temperature: -40°C to +115°C
- Soldering temperature: 250°C±10°C/5 Sec
- Safety Approval: us
- Critical dimension:

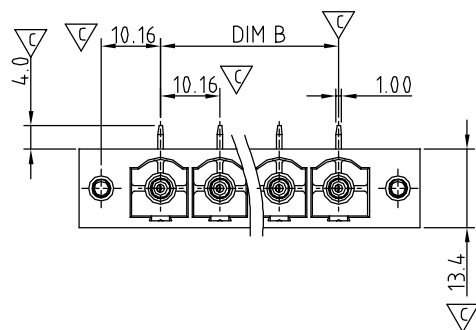

Poles	02	03	04	05	06	07	08
Dim L	38.08	48.24	58.40	68.56	78.72	88.88	99.04
Dim B	10.16	20.32	30.48	40.64	50.80	60.96	71.12
Dim C	20.32	40.64	50.80	60.96	71.12	81.28	91.44
TOL	±0.25			±0.35			

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ± 0.50

.X, ± 0.30

.XX, ± 0.10

.XXX, ±

ANG ± 1°

PPOJECTION

照片框

ORDER INFORMATION

TBH101-PRCF-xx-LF

SERIES

MALE

FLANGE

CAGE

DIP 90°

LEADFREE

02~08WAY

DESCRIPTION: