


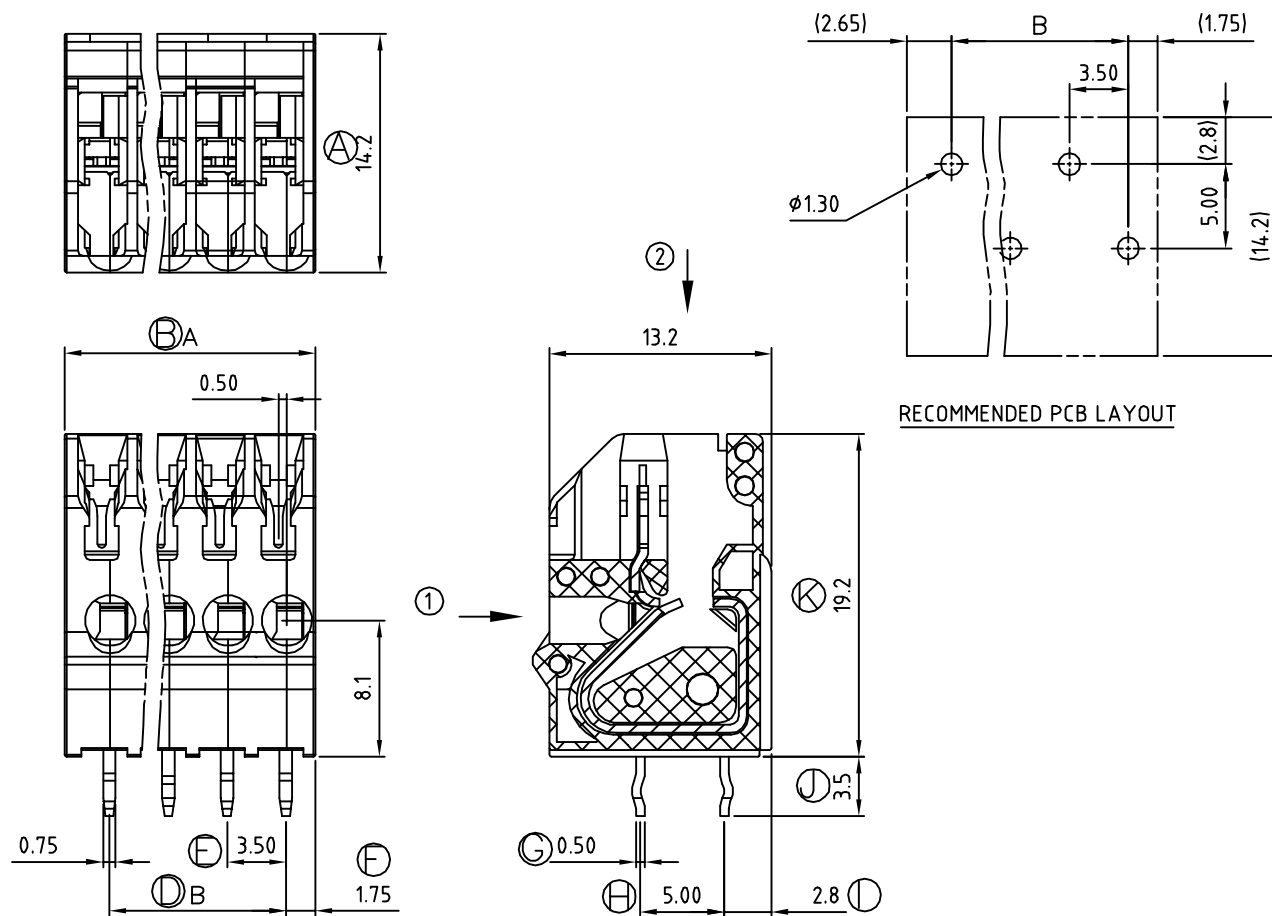

Material

- Contact pin : PhBz
- Surface of solder tail : Tin plated
- Insulator (housing): Thermoplastic (UL94V-0)

Electrical

- △ ● Voltage rating: 300V
- Current rating: 2A
- Wire range:
 - Phsh-Wire Connection: AWG 16-20 "sol"
 - Wire strip length: 7.5-8.5mm
- △ ● IDC Connection: AWG22 △ "sol"
- △ ● Withstanding Voltage: 1.6KV
- △ ● Operating temperature: -40°C to +115°C
- Soldering temperature: 250°C±10°C/5 Sec

POLE		2	3	4	5	6	7	8	9	10	11	12
A		7.90	11.4	14.90	18.40	21.90	25.4	28.90	32.4	35.9	39.4	42.90
B		3.50	7.00	10.50	14.00	17.50	21.00	24.50	28.00	31.50	35.00	38.50
Tol.		±0.15					±0.25					

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X, ±
.X ±
.XX ±
.XXX ±
ANG ±

P PROJECTION

照片框

ORDER INFORMATION

TB1035-D19R-xx-LF

SERIES

LEADFREE

02~12WAY

R TYPE FOOT

HIGH 19.2mm

DIP 180°

DESCRIPTION: