


N=Number of contacts

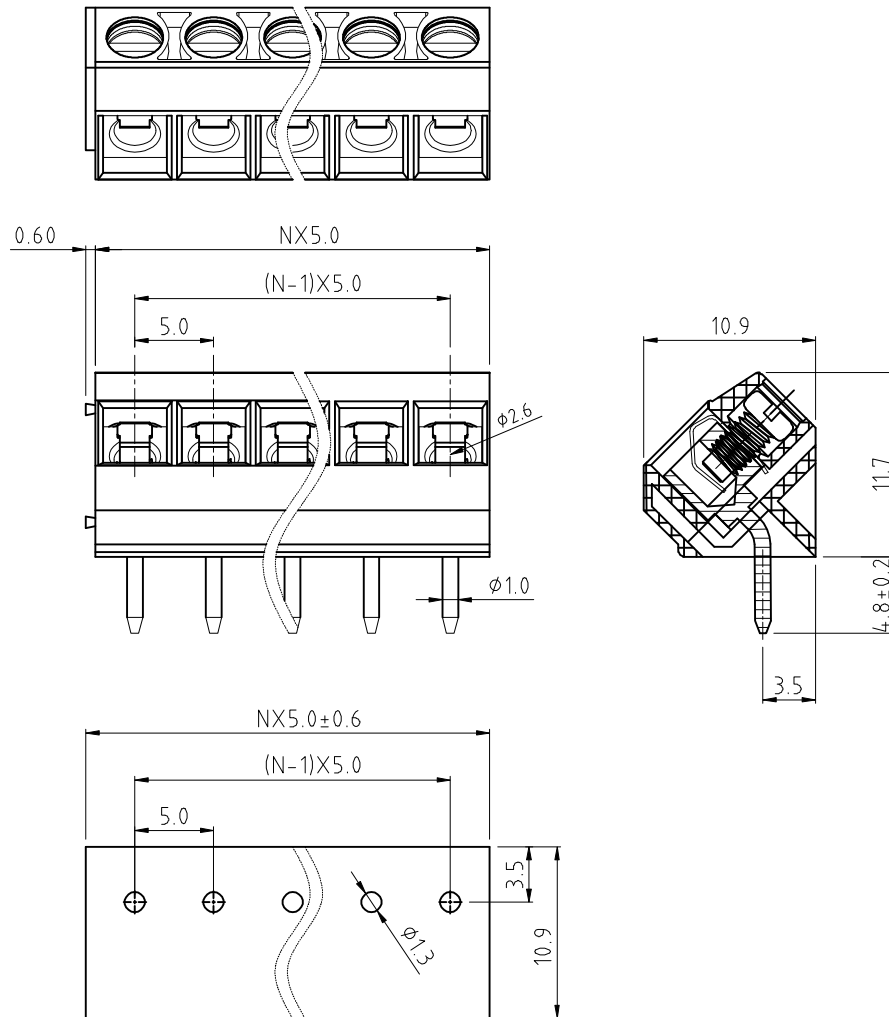

P.C.B. LAYOUT

#### Technical Data:

##### Material:

Terminal: Copper Alloy Tin plated  
 screw: Steel galvanized with Cr3+ plated  
 Wire guard: Stainless steel  
 Insulator body(housing): Polyamide(UL94V-0)

##### Electrical

Voltage rating: 300VAC  
 Current rating: 15 Amps/way max  
 Contact resistance: 20mΩ(max)  
 Withstanding Voltage: 2500VAC(1min) Test time=60sec/1pcs  
 Wire range: 14-22AWG

##### Mechanical:

Torque: 4.0kgf.cm/M2.6  
 Operating temperature: -40°C to +105°C  
 Soldering reliability:  
 Test temperature= 250°C±10°C  
 5 seconds max

##### Ordering Information:

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
 PCB CONNECTORS  
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

PPOJECTION

X, ±  
 .X ± 0.30  
 .XX ± 0.20  
 .XXX ±  
 ANG ±

照片框

#### ORDER INFORMATION

TBN050-A11-xx-LF

SERIES

LEADFREE

02-24WAY

HIGH 11.7mm

SLANT DIP

DESCRIPTION: