


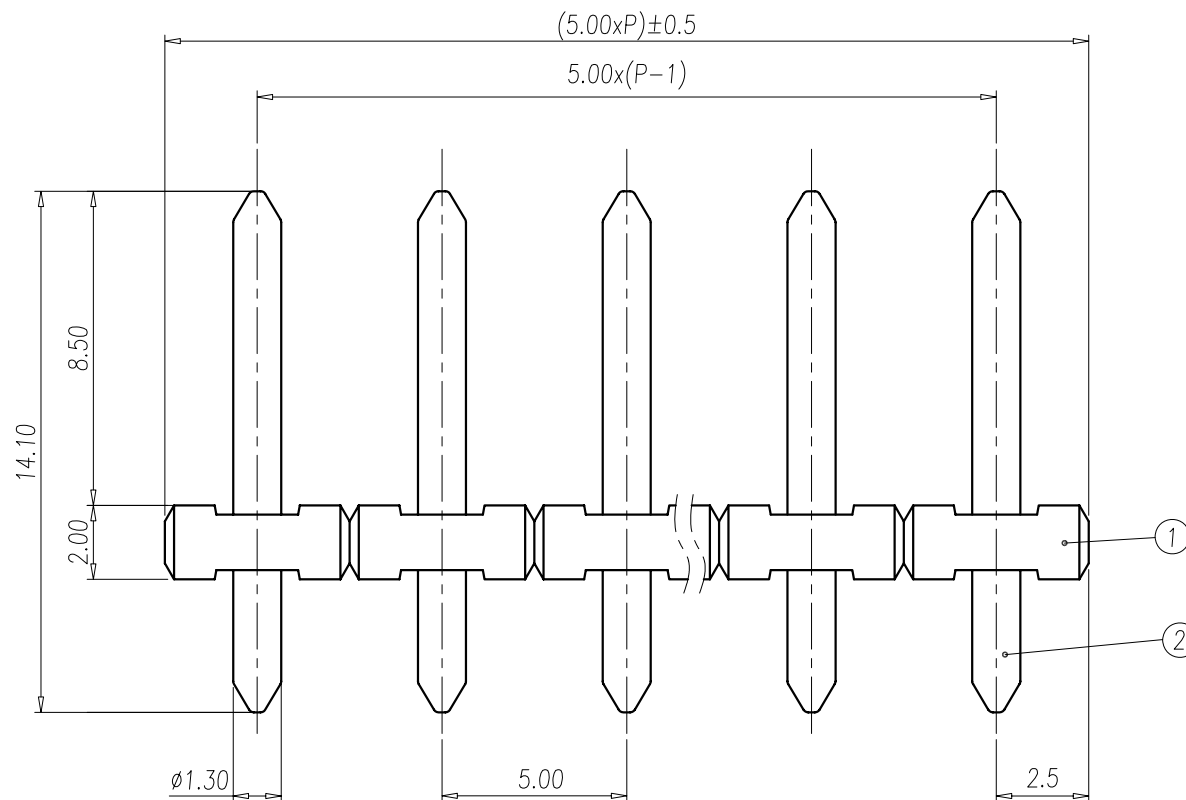

Normal Geometric Tolerancing					
— //		≡	⊥		
0 to 100	0.2	0.3	0 to 10	0.2	
over 100 to 150	0.3		over 10	0.3	
over 150	0.5				
Total Pitch Tolerances		Normal dimension Tolerances			
0<U≤30	±0.20		0~30	±0.25	
30<U≤53	±0.25		over 30~53	±0.30	
53<U≤70	±0.30		over 53~70	±0.35	
70<U≤90	±0.35		over 70~90	±0.44	
90<U≤115	±0.44		over 90~115	±0.55	
115<U≤150	±0.55		over 115~150	±0.70	
150<U≤200	±0.70		over 150~200	±0.85	
200<U≤250	±0.85		over 200~250	±1.00	
250<U≤320	±1.00		over 250~320	±1.20	

NOTES:

1. Rating: 300V 7 A
PITCH: 5.00mm
2. Insulation Resistance:
1000MΩ or more at DC500V
3. Using Temperature Range:
-40°C~+130°C
4. RoHS Compliance

2	SOLDER PIN	COPPER ALLOY	TIN PLATED
1	HOUSING	PBT	UL94-V0 GRAY
ITEM	NAME OF PART	MATERIAL	NOTES

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X, ±
.X ±
.XX ±
.XXX ±
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

TBN050-PD08-xx-LF

SERIES

LEADFREE
02~24WAY
CONTACT 8.5mm
DIP 180°
MALE

DESCRIPTION: