

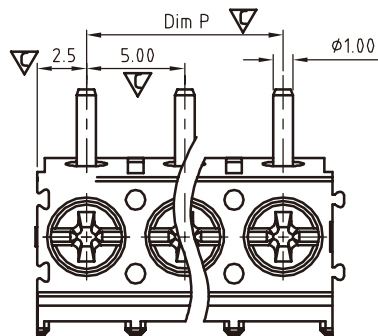
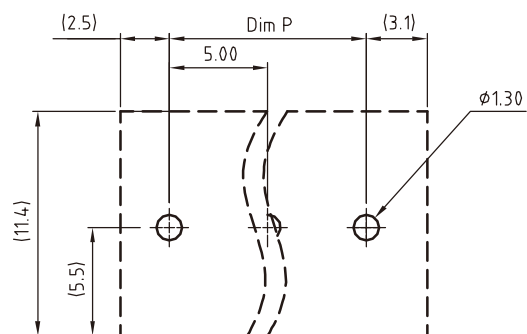


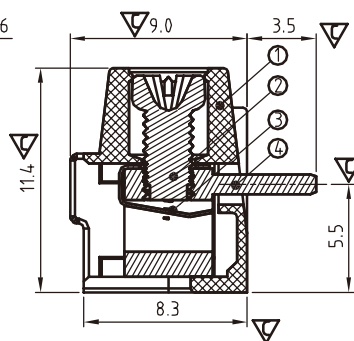

N = Number of poles
 Dim L = N x 5.0
 Dim P = (N-1) x 5.0

Poles	Dim.	Dim L	Dim P
2-6p		±0.15	±0.10
7-12p		±0.20	±0.20
13-18p		±0.30	±0.25
19-24p		±0.40	±0.30

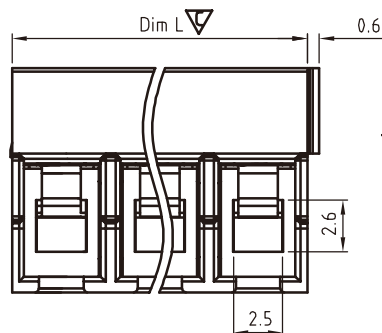

P.C.B Layout

Materials

- Item ① insulating body
- Item ② Steel screw
- Item ③ Wire guard
- Item ④ Terminal body

PA66 (UL94V-0)
 Screw, Zinc plating("+/-" slot type)
 Stainless steel
 Brass(CuZn) Tin Plated

Electrical cULus

- Voltage rating: 300VAC
- Current rating: 15A
- Wire range:
- Solid wire(AWG): 12-24
- Stranded wire(AWG): 12-24
- Torque(Lb-In): 3.0
- Screw: M2.6
- Wire strip length: 5-6mm
- Withstanding Voltage: 1.6KV
- Operating temperature: -40°C to +115°C
- Soldering temperature: 260°C±5°C/5 Sec
- Safety Approval:  
- Critical dimension: 

CQC
 250VAC
 24A

0.2-2.5mm²
 0.2-2.5mm²
 0.4N.m

2KV

RoHS Compliant

TOLERANCES ARE

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ± 0.50
 .X ± 0.30
 .XX ± 0.20
 .XXX ±
 ANG ±

PPOJECTION 

照片框

ORDER INFORMATION

TBN050-R09-xx-LF

SERIES

LEADFREE

02~24WAY

HIGH 9.0mm

DIP 90°

DESCRIPTION:

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com