
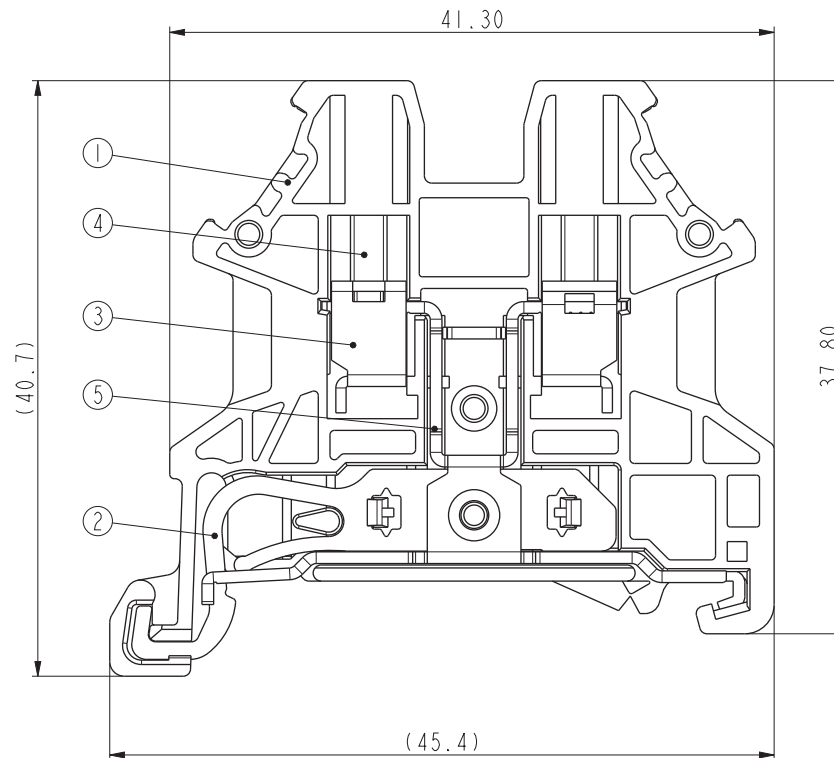



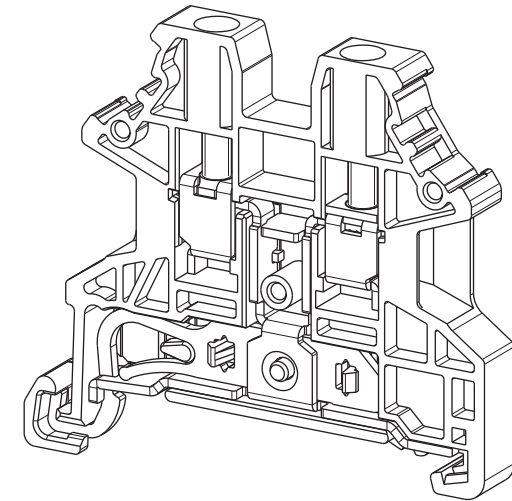

5	CURRENT BAR	COPPER ALLOY	Tin PLATED
4	SCREW	STEEL	M2.5/ Zn PLATED
3	WIRE CAGE	STEEL	M2.5/ Zn PLATED
2	CLAMP	STEEL	Zn PLATED
1	HOUSING	PA66	UL94-V0 YELLOW-GREEN
ITEM	NAME OF PART	MATERIAL	NOTES

Total Pitch Tolerances		Normal dimension Tolerances	
0~30	±0.20	0~30	±0.25
over 30~53	±0.25	over 30~53	±0.30
over 53~70	±0.30	over 53~70	±0.35
over 70~90	±0.35	over 70~90	±0.44
over 90~115	±0.44	over 90~115	±0.55
over 115~150	±0.55	over 115~150	±0.70
over 150~200	±0.70	over 150~200	±0.85
over 200~250	±0.85	over 200~250	±1.00
over 250~320	±1.00	over 250~320	±1.20

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±

.X ±

.XX ±

.XXX ±

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

TBR051-W3740-01-LF

SERIES

LEADFREE

01 WAY

HIGH 37.8 + 40.70mm

SCREW WIRE

DESCRIPTION: