


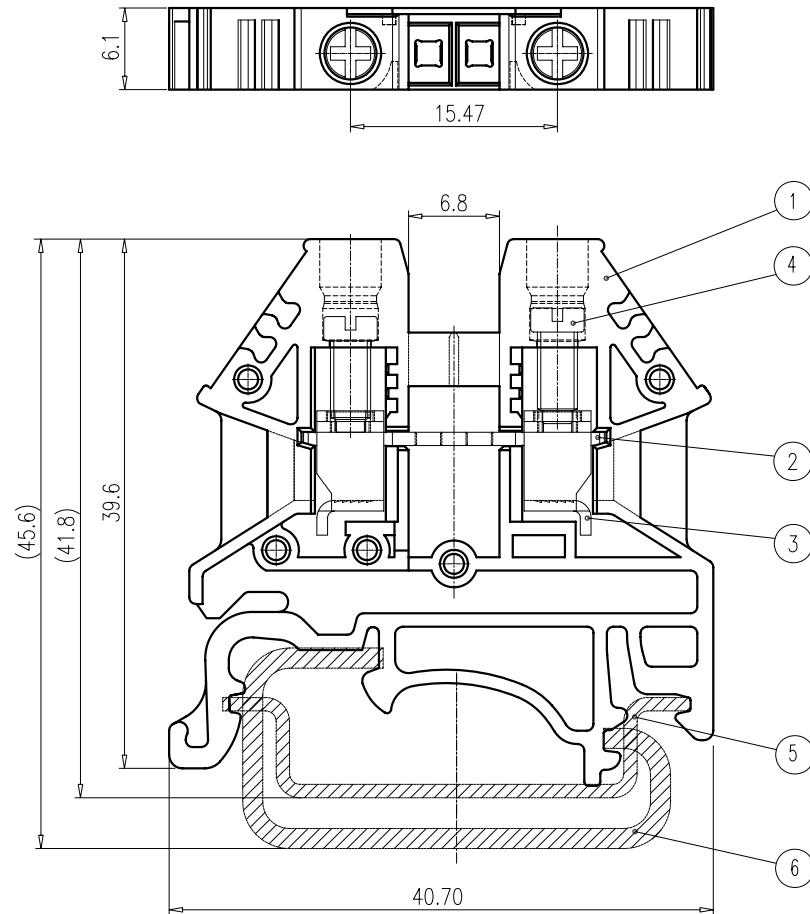

NOTES:

- Rating: UL 600V 30A
IEC 1000V(TS-35) 32A
800V(TS-32) 32A
- Insulation Withstands Voltage:
AC 2200V at 1 minute
- Insulation Resistance:
500M Ω or more at DC500V
- Using Temperature Range:
-40°C~+105°C
- Screw Torque Value:0.6N·m
- Suitable Electric Wire: UL AWG 22~10
(IEC 0.34~4mm²)
- RoHS compliance

6	MOUNTING RIAL		此为模拟件
5	MOUNTING RIAL		
4	SCREW	STEEL	Zn Plated
3	WIRE CAGE	STEEL	Zn Plated
2	CONDUCTOR	COPPER-ALLOY	Tin Plated
1	HOUSING	PA66	UL94-V0 GREY
	NAME OF PART	MATERIAL	NOTES

Normal Geometric Tolerancing					
0 to 100	0.2	0 to 10	0.2		
over 100 to 150	0.3	over 10	0.3		
over 150	0.5				
Total Pitch Tolerances	Normal dimension Tolerances				
0<U<=30	±0.20	0~30	±0.25		
30<U<=53	±0.25	over 30~53	±0.30		
53<U<=70	±0.30	over 53~70	±0.35		
70<U<=90	±0.35	over 70~90	±0.44		
90<U<=115	±0.44	over 90~115	±0.55		
115<U<=150	±0.55	over 115~150	±0.70		

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

TBR061-W396-01-LF

SERIES

LEADFREE

01 WAY
HIGH 39.6mm
SCREW WIRE

DESCRIPTION: