
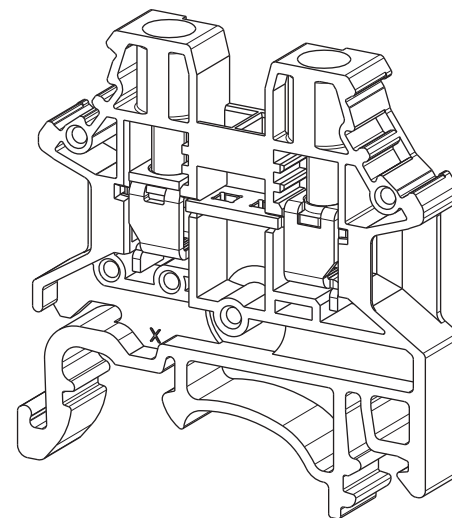

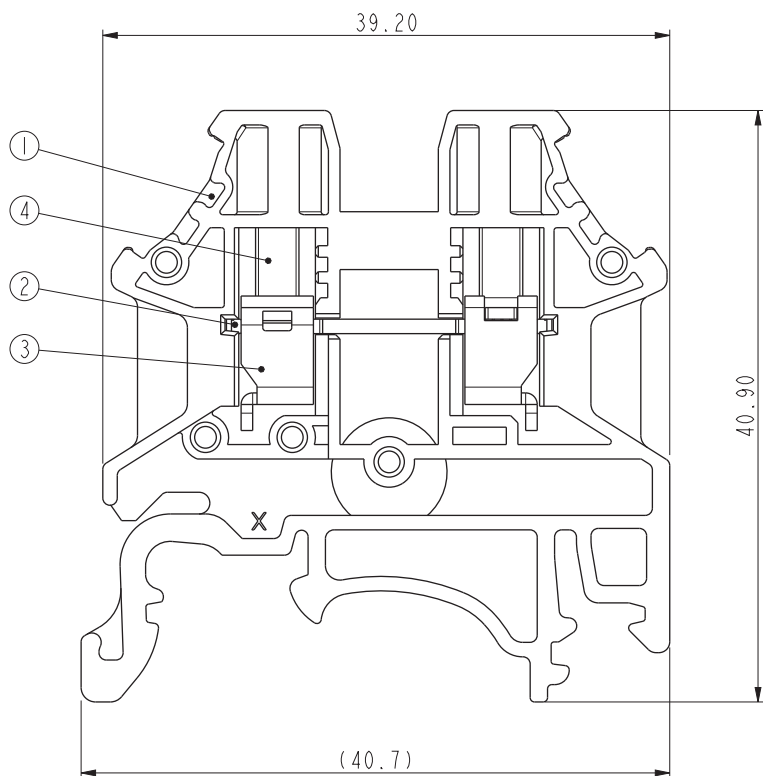




|      |              |              |                  |
|------|--------------|--------------|------------------|
| 4    | SCREW        | STEEL        | M3/<br>Zn PLATED |
| 3    | WIRE CAGE    | STEEL        | M3/<br>Zn PLATED |
| 2    | CURRENT BAR  | COPPER ALLOY | Tin PLATED       |
| 1    | HOUSING      | PA66         | UL94-V0          |
| ITEM | NAME OF PART | MATERIAL     | NOTES            |

| Total Pitch<br>Tolerances |       | Normal dimension<br>Tolerances |       |
|---------------------------|-------|--------------------------------|-------|
| 0~30                      | ±0.20 | 0~30                           | ±0.25 |
| over 30~53                | ±0.25 | over 30~53                     | ±0.30 |
| over 53~70                | ±0.30 | over 53~70                     | ±0.35 |
| over 70~90                | ±0.35 | over 70~90                     | ±0.44 |
| over 90~115               | ±0.44 | over 90~115                    | ±0.55 |
| over 115~150              | ±0.55 | over 115~150                   | ±0.70 |
| over 150~200              | ±0.70 | over 150~200                   | ±0.85 |
| over 200~250              | ±0.85 | over 200~250                   | ±1.00 |
| over 250~320              | ±1.00 | over 250~320                   | ±1.20 |

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±


.X ±

.XX ±

.XXX ±

ANG ±

PPOJECTION



ORDER INFORMATION

TBR061-W409-01-LF

SERIES

LEADFREE

01 WAY

HIGH 40.9mm

SCREW WIRE

DESCRIPTION: