

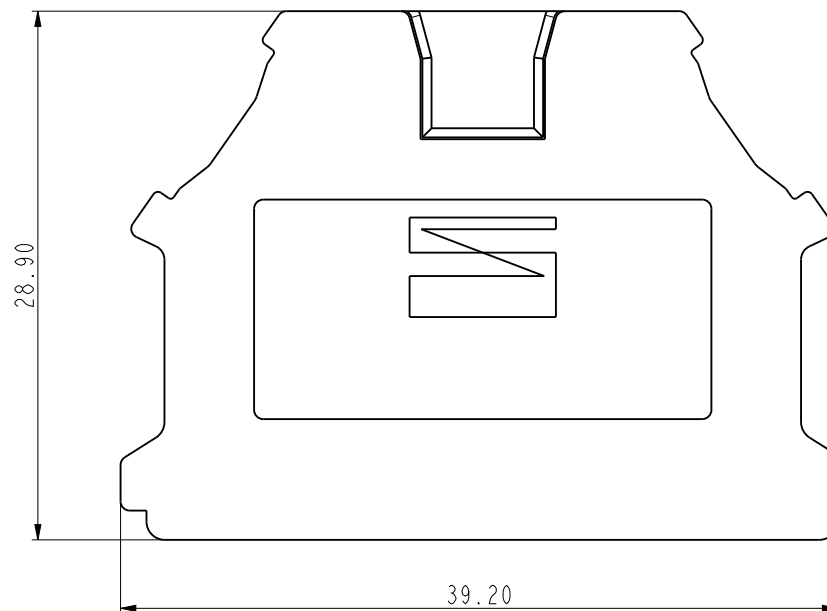


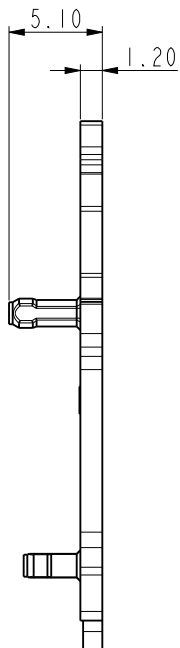

NOTES:
1. RoHS Compliance

Total Pitch Tolerances		Normal dimension Tolerances	
er 0~30	±0.20	er 0~30	±0.25
er 30~53	±0.25	er 30~53	±0.30
er 53~70	±0.30	er 53~70	±0.35
er 70~90	±0.35	er 70~90	±0.44
er 90~115	±0.44	er 90~115	±0.55
er 115~150	±0.55	er 115~150	±0.70
er 150~200	±0.70	er 150~200	±0.85
er 200~250	±0.85	er 200~250	±1.00
er 250~320	±1.00	er 250~320	±1.20

I	COVER	PA66	UL94-V0
ITEM	NAME OF PART	MATERIAL	NOTES

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ±
.XX ±
.XXX ±
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

TBR061-W409C-01-LF

SERIES

LEADFREE

01 WAY
COVER FOR W409
HIGH 40.9mm
SCREW WIRE

DESCRIPTION: