


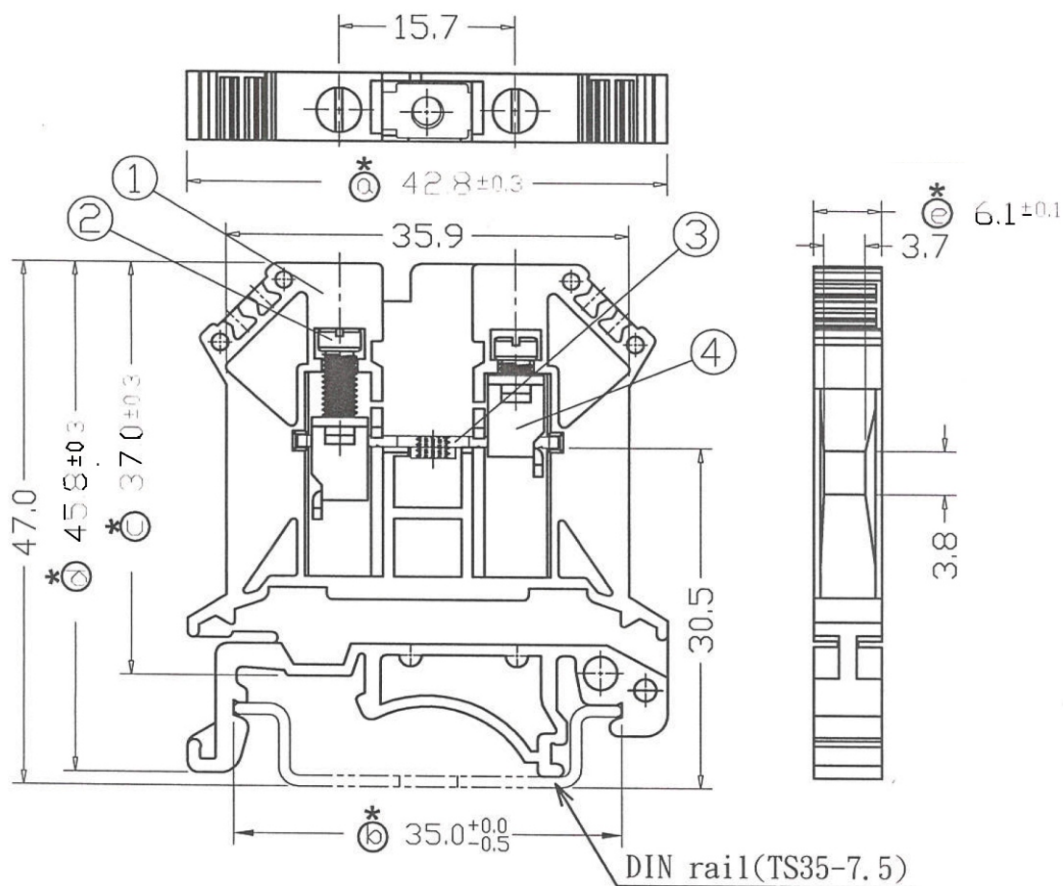

	CUL	IEC
Rated voltage	600V	800V
Rated current	30A	32A
Solid wire	22~10AWG	0.5~4mm ²
Stranded wire	22~10AWG	0.5~4mm ²
Impulse withstand voltage	6KV	
Torque(Terminal Screw)	1.13Nm (10in-lbs)	
Torque(Jumper Screw)	0.68Nm (6in-lbs)	
Terminal Screw	M3	
Wire strip length	8~10mm	
Mounting DIN rail	TS35-7.5/TS35-15/TS32	

	Material		Plating/Finish	Remark
1	Insulating body	PA66 (UL94 V-0)		
2	Terminal Screw	Steel M3	Zinc	
3	Terminal	Phosphor bronze	Tin plated	
4	Cage clamp	Steel	Zinc	

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X, ±

.X, ±

.XX, ±

.XXX, ±

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

TBR061-W458-01-LF

SERIES

LEADFREE

01 WAY

HIGH 45.8mm

SCREW WIRE

DESCRIPTION: