
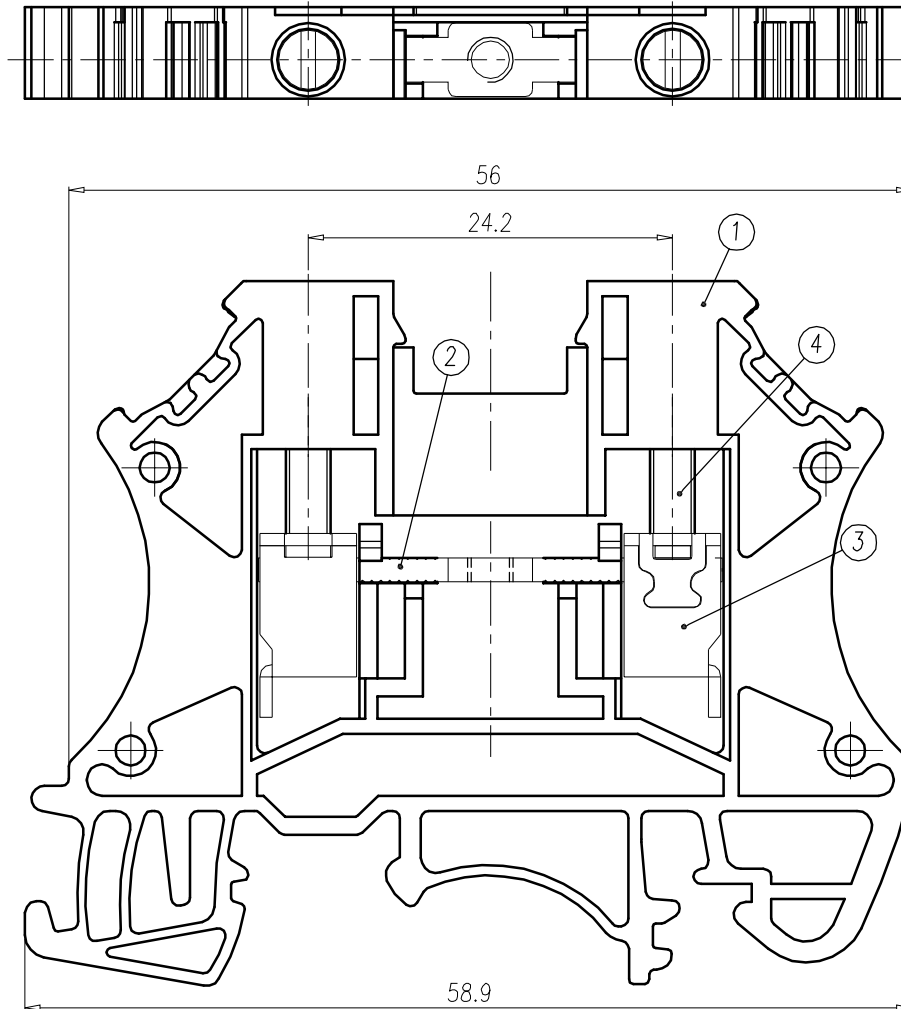


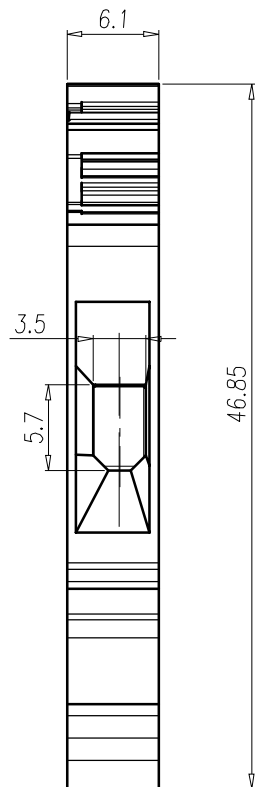

NOTES 1:

UL Standard :

- 1.Rating: 600V 35A
- 2.Insulation Withstands Voltage:
AC 2000V at 1 minute
- 3.Using Temperature Range:
-40°C~+115°C
- 4.Screw Torque Value:0.79N· m
- 5.Suitable Electric Wire:AWG 22~10

IEC Standard:

1. Rating: 630V 32A
2. Rate Impulse Voltage: 8000V
3. Insulation Resistance:
500MΩ or more at DC500V
4. Material Group : I
5. Pollution Degree : 3
6. Overvoltage Category: III
7. Using Temperature Range:
-40°C~+120°C
8. Screw Torque Value: 0.5N· m
9. Suitable Electric Wire: 0.34~4mm²

NOTES 2:

1. RoHS compliance

4	SCREW	STEEL	Zn Plated
3	WIRE CAGE	STEEL	Zn Plated
2	CONDUCTOR	COPPER ALLOY	Tin Plated
1	HOUSING	PA	UL94-V0 GRAY
ITEM	NAME OF PART	MATERIAL	NOTES

Total Pitch Tolerances		Normal Dimension Tolerances	
0~30	±0.20	0~30	±0.25
over 30~53	±0.25	over 30~53	±0.30
over 53~70	±0.30	over 53~70	±0.35
over 70~90	±0.35	over 70~90	±0.44
over 90~115	±0.44	over 90~115	±0.55
over 115~150	±0.55	over 115~150	±0.70
over 150~200	±0.70	over 150~200	±0.85
over 200~250	±0.85	over 200~250	±1.00
over 250~320	±1.00	over 250~320	±1.20

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ±
.XX ±
.XXX ±
ANG ±



ORDER INFORMATION

TBR061-W468-01-LF

SERIES

LEADFREE

01 WAY

HIGH 46.85mm

SCREW WIRE

DESCRIPTION: