
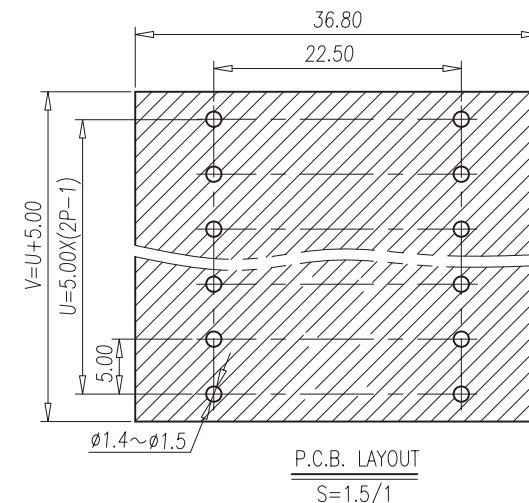


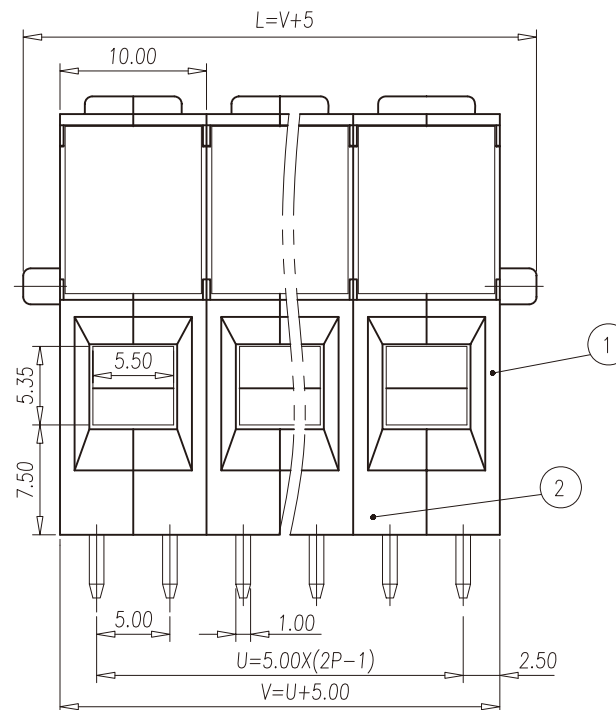

1. Rating: 300V 65A
PITCH: 10.00mm
2. Insulation Withstands Voltage:
AC 2000V at 1 minute
3. Insulation Resistance:
500M Ω or more at DC500V
4. Using Temperature Range:
-40°C~+105°C
5. Screw Torque Value: 1.2 N·m
6. Suitable Electric Wire: AWG 24~6
7. RoHS Compliance

5	SOLDER PIN	COPPER-ALLOY	M4/Tin Plated
4	CAGE	STEEL	M4/Zn Plated
3	SCREW	STEEL	M4
2	HOUSING	PA66	UL94-V0 GREEN
1	HOUSING	PA66	UL94-V0 GREEN
ITEM	NAME OF PART	MATERIAL	NOTES

照片框

LEADFREE
01 WAY
H 28.7mm
0°

DESCRIPTION: