
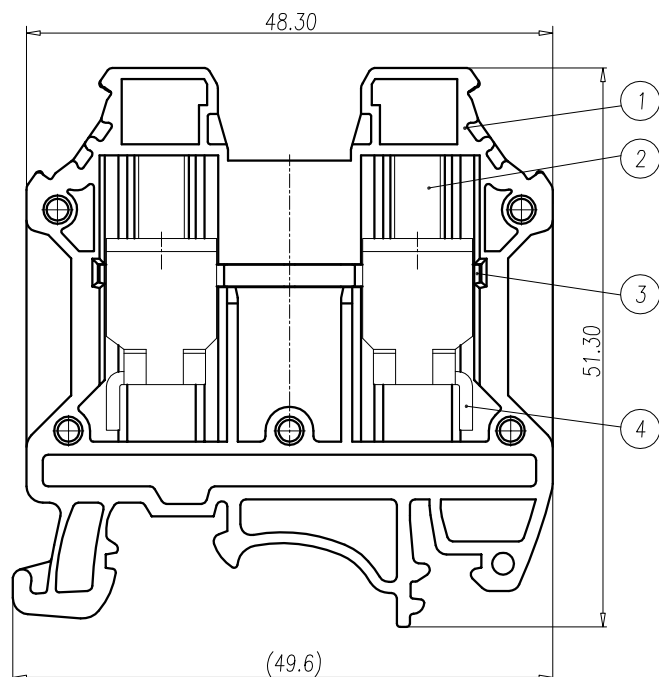
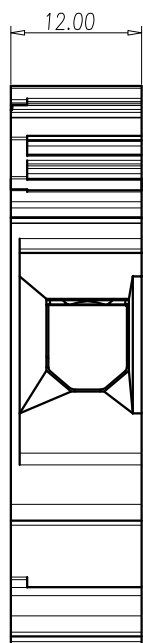


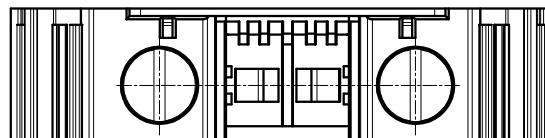

Total Pitch Tolerances		Normal Dimension Tolerances	
0~30	f	0~30	f
over 30~53	f	over 30~53	f
over 53~70	f	over 53~70	f
over 70~90	f	over 70~90	f
over 90~115	f	over 90~115	f
over 115~150	f	over 115~150	f
over 150~200	f	over 150~200	f
over 200~250	f	over 200~250	f
over 250~320	f	over 250~320	f

NOTES 1:

UL Standard :

- 1.Rating: 600V 100A
- 2.Insulation Withstands Voltage:
AC 2200 V at 1 minute
- 3.Using Temperature Range:
-40°C~+105°C
4. Screw Torque Value: 2.5~3.4Ng m
- 5.Suitable Electric Wire:AWG 14~3

IEC Standard:

- 1.Rating: 1000V 76A
2. Rate Impulse Voltage: 8000V
- 3.Insulation Resistance:
500MΩ or more at DC1000V
4. Material Group : I
5. Pollution Degree : 3
6. Overvoltage Category: III
7. Using Temperature Range:
-40°C~+120°C
- 8.Screw Torque Value: 2Ng m
- 9.Suitable Electric Wire: 1.5~16mm²

NOTES 2:

1. RoHS compliance
2. Strip Length:14~16mm
- 3.Height TS-35N:52.2mm
Height TS-35/15N: 59.7mm

4	WIRE CAGE	STEEL	M5/Zn Plated
3	CONDUCTOR	COPPER ALLOY	Tin Plated
2	SCREW	STEEL	M5/Zn Plated
1	HOUSING	PA66	UL94-V0 GREY
ITEM	NAME OF PART	MATERIAL	NOTES

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

TBR120-W51-01-LF

SERIES

LEADFREE
01 WAY
HIGH 51.30mm
SCREW WIRE

DESCRIPTION: