


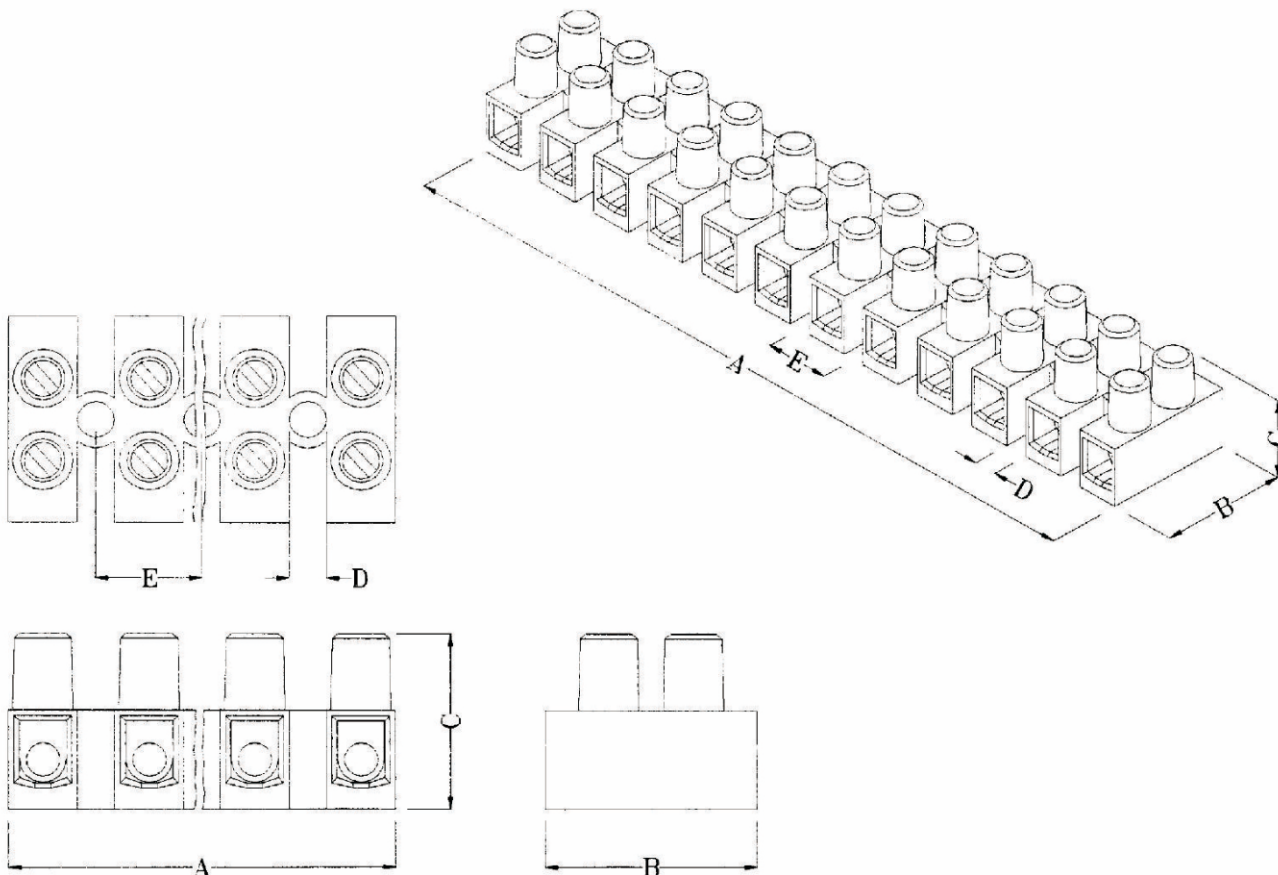

ITEM NO	Barehole for clamping area	SCREW	A	B	C	D	E
TBT100-W-12	3.6	3.0X6	117.5	20	17	3.5	10
TBT100-WP-12 (Wire protector)	3.6	3.0X6	117.5	20	17	3.5	10

SPECIFICATION

Voltage rating: 380V AC
 Rating capacity: 5A to 26A
 Temperature limit: short time 140 °C~160 °C
 continuous 80 °C~105 °C
 cold resistant -40 °C

Resistance to tracking: KB>600

Safety standard approval:

UL, VDE, SEMKO, DEMKO, SETI, SEV, OVE, CB

MATERIAL

Molding: Polyamide PA6/6, natural color
 Inserts: Nicked-plated brass
 Wire protector: Stainless spring steel
 Screw: Zinc plated steel, yellow chromated

NUMBER OF WIRES APPLIED

ITEM No.	0.75mm ²	1mm ²	1.5mm ²	2.5mm ²	4mm ²	6mm ²
TBT100-W-12		8	4	2	2	2
TBT100-WP-12		8	4	2	2	2

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
 .X ±
 .XX ±
 .XXX ±
 ANG ±

照片框

ORDER INFORMATION

TBT100-Wx-12-LF

SERIES T LEADFREE

12 WAY

P: WIRE/PROTECTOR
WIRE TO WIRE

DESCRIPTION: