

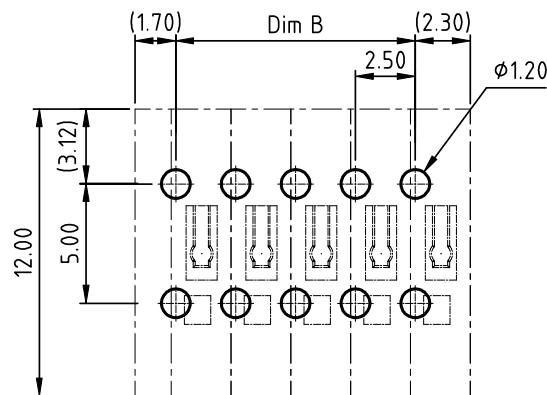
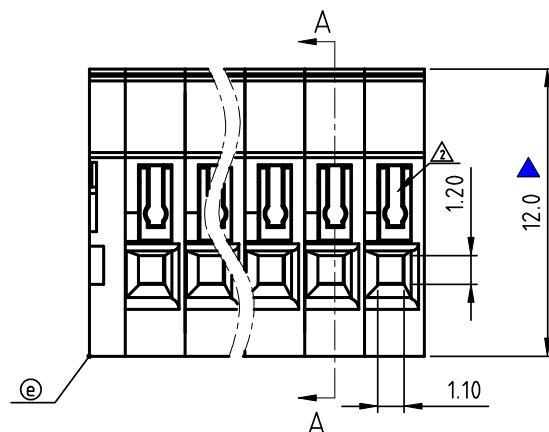


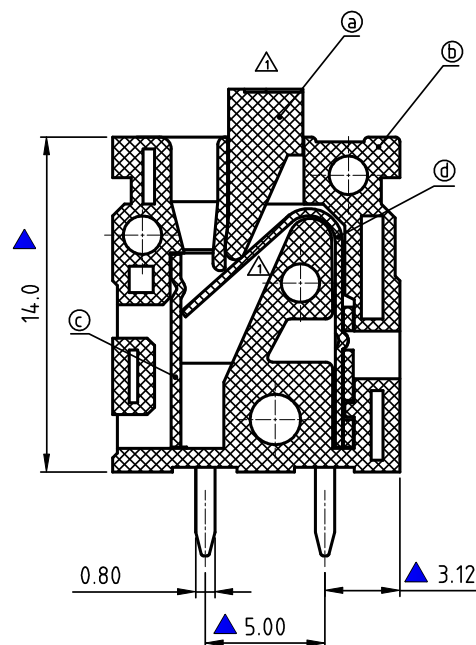

P.C.B LAYOUT

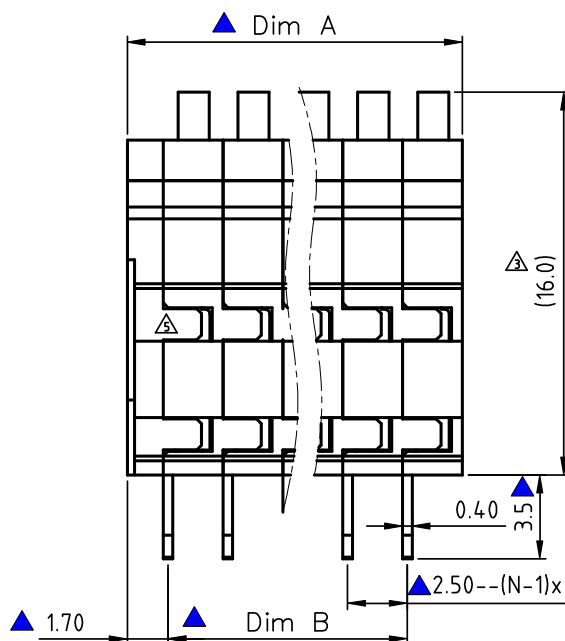

Material:

- Item a :Terminal lever:Thermoplastic (UL94 V-0)
- Item b :Terminal body Thermoplastic (UL94 V-0)
- Item c :Solder pin: Brass Tin plated
- Item d :wire guard: Stainless steel
- Item e :Termianl cover: Thermoplastic (UL94V-0)

Electrical

cULus

- Voltage rating: 150V
- Current rating: 3A
- Wire range: 0.08~0.52mm²;
- Solid wire(AWG): 20-28
- Stranded wire(AWG): 20-28
- Wire strip length: 9-10mm
- Withstanding Voltage: 1.3KV
- Operating temperature: -40°C to +115°C
- Soldering temperature: 260°C±5°C/5 Sec
- Safety Approval: 
- Critical dimension: ▲

N = Number of poles

Dim A=Nx2.5+1.5 ▲

Dim B=(N-1)x2.5 ▲

Poles	Dim A	Dim B
2-6p	±0.20	±0.20
7-12p	±0.25	±0.25
13-24p	±0.30	±0.30

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ± 0.50

.X, ± 0.30

.XX, ± 0.10

.XXX, ±

ANG ± 1°

PPOJECTION 

照片框

ORDER INFORMATION

TBX025-D16B05-xx-LF

SERIES

LEADFREE

02-24WAY

5.0mm

HIGH 16.0mm

DIP 180°

DESCRIPTION: 2.5mm series Double tail A type Vertical (90D wire inlet)