




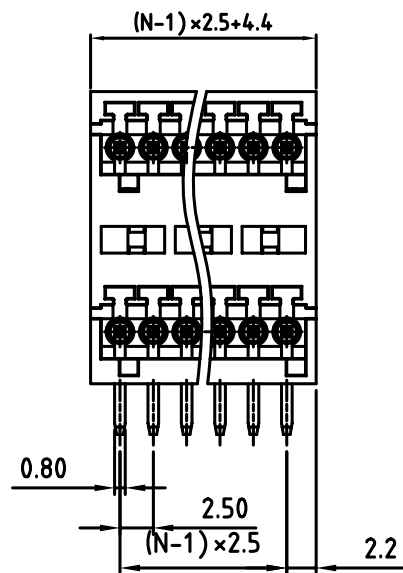

N=Number of contacts

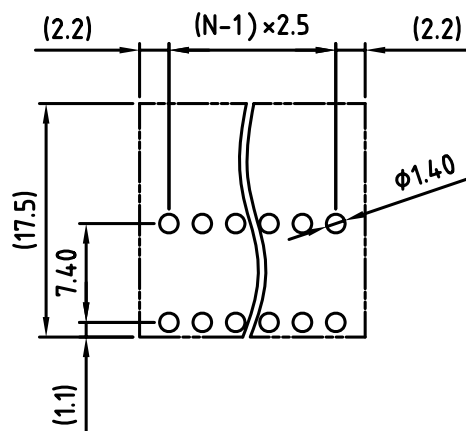

P.C.B. LAYOUT

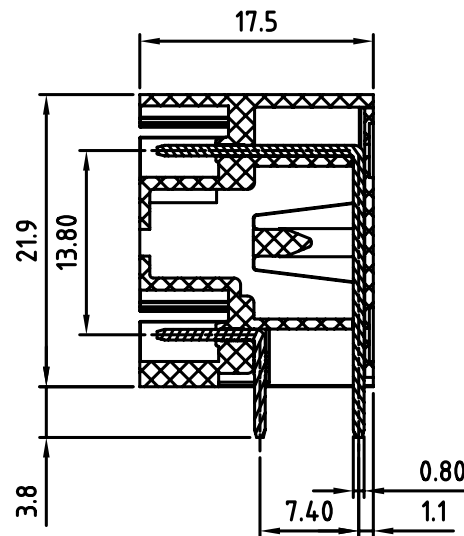

Material

- Terminal body (Contact pin): Brass Whit Tin plated
- Insulator (housing): Thermoplastic (UL94V-0)

Electrica

- Voltage rating: 125V
- Current rating: 4A
- Withstanding Voltage: 1.25KV
- Operating temperature: -30°C to $+105^{\circ}\text{C}$
- Soldering temperature: $245^{\circ}\text{C} \pm 10^{\circ}\text{C}/5 \text{ Sec}$

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. $\pm$


.X $\pm$

.XX $\pm$

.XXX $\pm$

ANG $\pm$

PPOJECTION



ORDER INFORMATION

TBX025B1-PRB-xx-LF

SERIES

LEADFREE

02 PER ROW:04 PIN

12 PER ROW:24 PIN

BOX

DIP 90°

MALE

DESCRIPTION: