

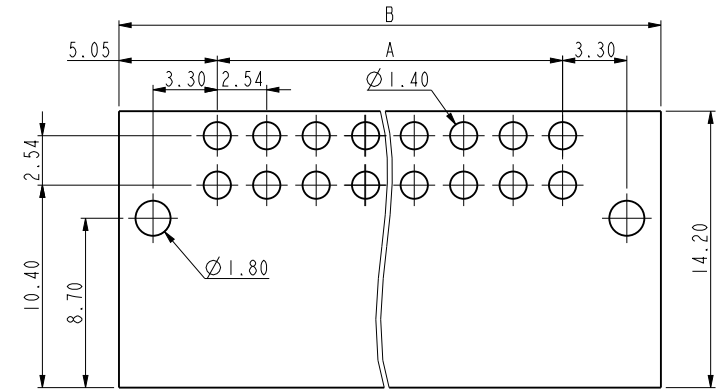

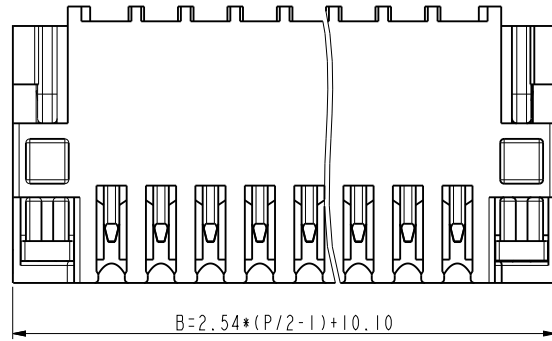
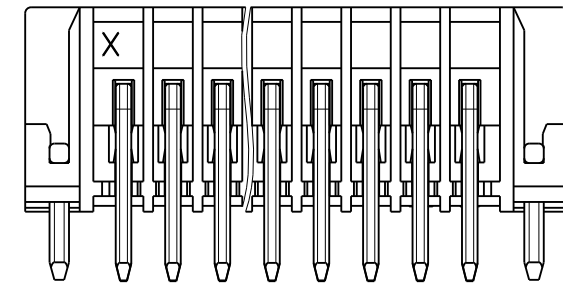


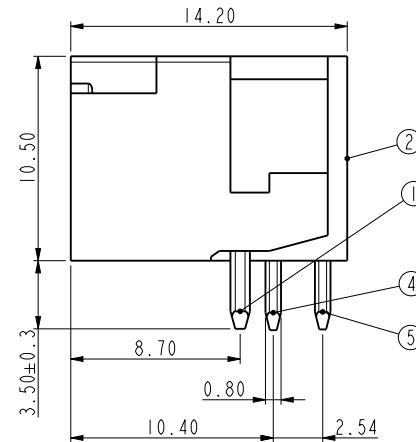

PCB LAYOUT

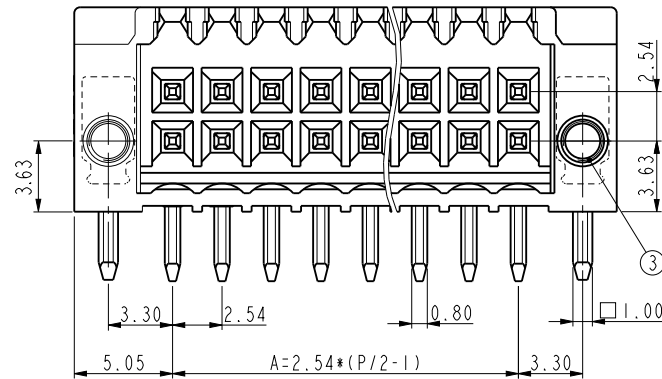

P	4	6	8	10	12	14	16
A	2.54	5.08	7.62	10.16	12.70	15.24	17.78
B	12.64	15.18	17.72	20.26	22.80	25.34	27.88
P	18	20	22	24	26	28	30
A	20.32	22.86	25.40	27.94	30.48	33.02	35.56
B	30.42	32.96	35.50	38.04	40.58	43.12	45.66
P	32	34	36	38	40	42	44
A	38.10	40.64	43.18	45.72	48.26	50.80	53.34
B	48.20	50.74	53.28	55.82	58.36	60.90	63.44

5	SOLDER PIN 2	COPPER ALLOY	Tin Plated
4	SOLDER PIN 1	COPPER ALLOY	Tin Plated
3	NUT	STEEL	M2/ Zn Plated
2	HOUSING	PA66	UL94-V0 BLACK
1	HOLDER PIN	COPPER ALLOY	Tin Plated
ITEM	NAME OF PART	MATERIAL	NOTES

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

TBX026-PRF-2Xxx-LF

SERIES

MALE

FLANGE

DIP 90°

LEADFREE

2X02:04WAY

2X22:44WAY

DESCRIPTION: