


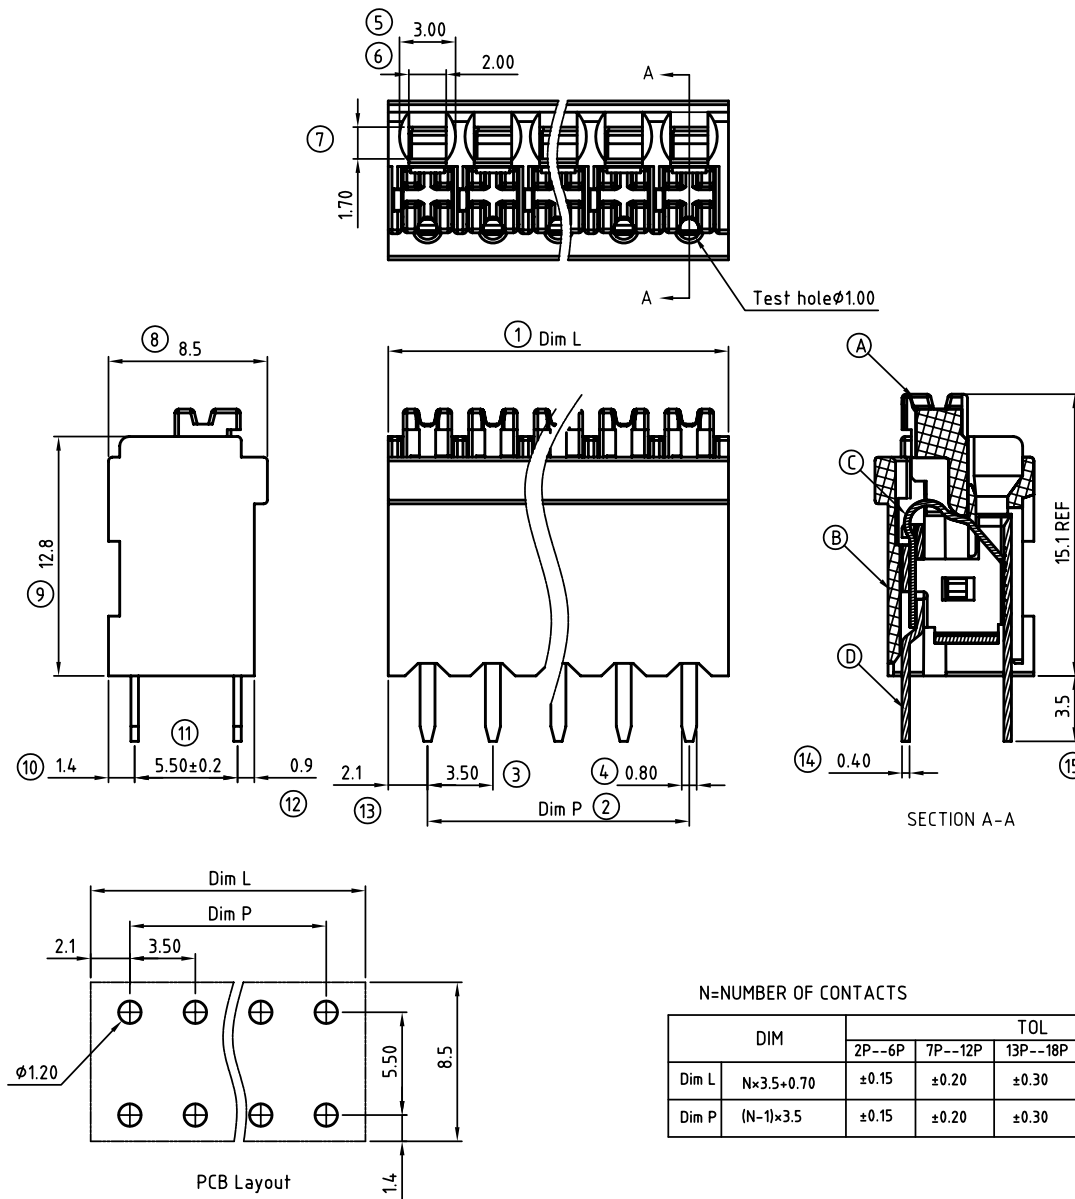

Material:

- Item (A) Lever: Thermoplastic (UL 94V-0)
- Item (B) Terminal housing: Thermoplastic (UL 94V-0)
- Item (C) Wire guard: Stainless steel
- Item (D) Solder Pin: Brass.Tin plated

Electrical:

- Voltage rating: 300 V
- Current rating: 10 A
- Wire range:
- Solid wire(AWG): 16-24
- Stranded wire(AWG): 16-24
- Wire strip length: 12-13 mm
- Withstanding Voltage: 1.6KV
- Operating temperature: -40°C to +115°C
- Soldering temperature: 250°C $\pm 10^\circ\text{C}/5\text{ Sec}$
- Safety Approval:

N=NUMBER OF CONTACTS

DIM	TOL			
	2P--6P	7P--12P	13P--18P	19P--24P
Dim L	N $\times 3.5 \pm 0.70$	± 0.15	± 0.20	± 0.30
Dim P	(N-1) $\times 3.5$	± 0.15	± 0.20	± 0.30

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ± 0.50

.X ± 0.30

.XX ± 0.10

.XXX $\pm$

ANG $\pm 1^\circ$

PPOJECTION

照片框

ORDER INFORMATION

TBX035-D15B-xx-LF

SERIES

LEADFREE

02~24WAY

TWO LEG

HIGH 15.1mm

DIP180°

DESCRIPTION: