
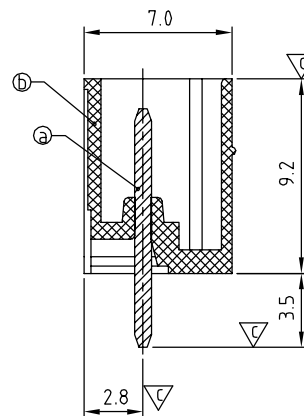
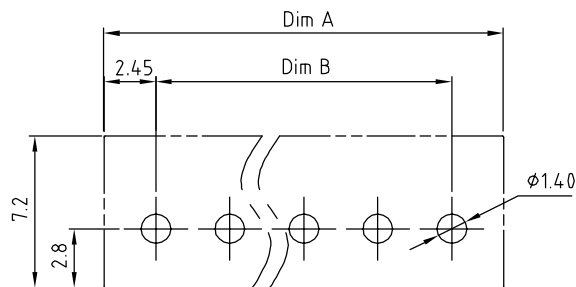
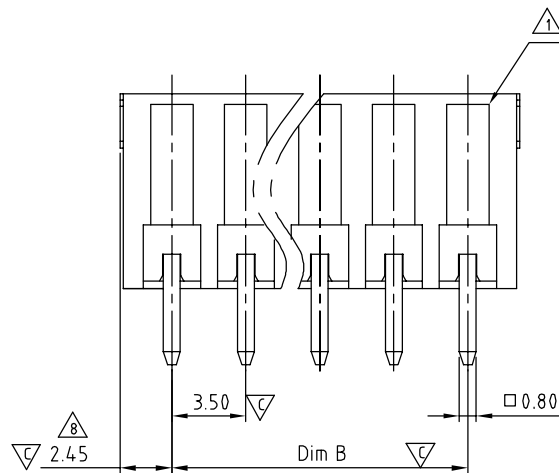


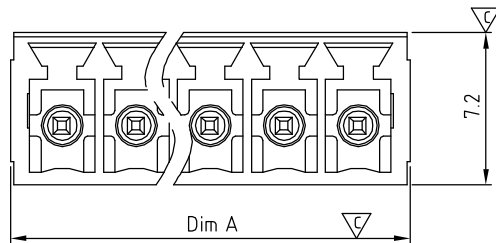

Material:

- Item ⑤ Male contact pin: Copper Tin plated
- Item ⑥ Terminalhousing: Thermoplastic (UL94V-0)

Electrical: cULus /VDE

- ⑨ Voltage rating: 300V/300V
- Current rating: 10A/10.5A
- Withstanding Voltage: 1.6 KV/2.5KV
- ④ ● Operating temperature: -40°C to +115°C
- ③ ● Soldering temperature: 250°C±10°C/5 Sec
- ⑦ ● Safety Approval: cULus
- Critical dimension: ⑧

DIMENSION

A	(N-1)×3.5+4.90	⑧
B	(N-1)×3.5	

N= NUMBER OF CONCATS

Poles	Tolerance
2P-6P	±0.15
7P-12P	±0.20
13P-18P	±0.25
19P-24P	±0.30

RECOMMENDED PCB LAYOUT

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ± 0.50

.X ± 0.30

.XX ± 0.10

.XXX ±

ANG ± 1°

PPOJECTION

照片框

ORDER INFORMATION

TBX035-PDC-xx-LF

SERIES

LEADFREE

02~24WAY

CAGE

DIP 180°

MALE

DESCRIPTION: 3.5mm Series 180° (2P-24P) Triangle Key Lock