





PCB Layout

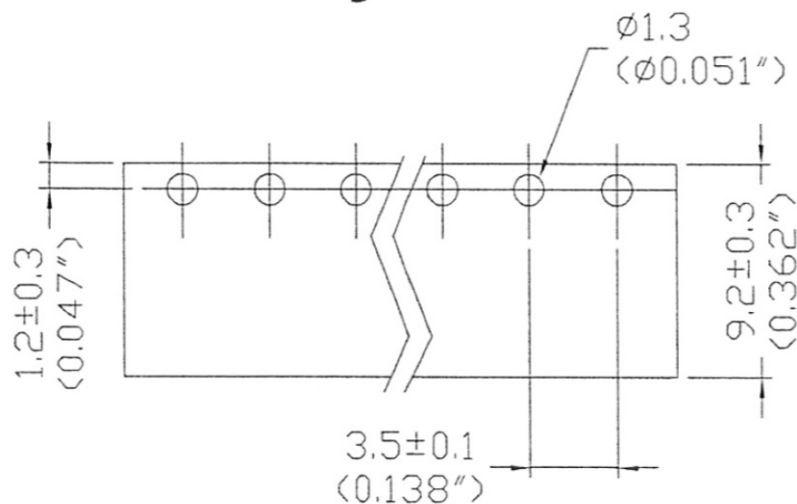

Current rating : 12Amp AC150V
 Insulation withstands volt : AC2000V min
 Insulation resistance : >2000MΩ DC500V
 Operation temperature : -40°C to +105°C

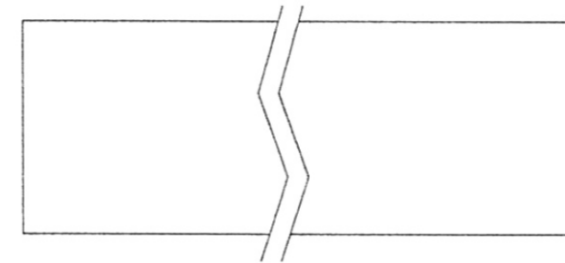

Pitch : 3.50mm(0.138inch)					
Poles	A(mm)	A(inch)	Poles	A(mm)	A(inch)
2	7.60	0.299	15	53.10	2.091
3	11.10	0.437	16	56.60	2.228
4	14.60	0.575	17	60.10	2.366
5	18.10	0.713	18	63.60	2.504
6	21.60	0.850	19	67.10	2.642
7	25.10	0.988	20	70.60	2.780
8	28.60	1.126	21	74.10	2.917
9	32.10	1.264	22	77.60	3.055
10	35.60	1.402			
11	39.10	1.539			
12	42.60	1.677			
13	46.10	1.815			
14	49.60	1.953			

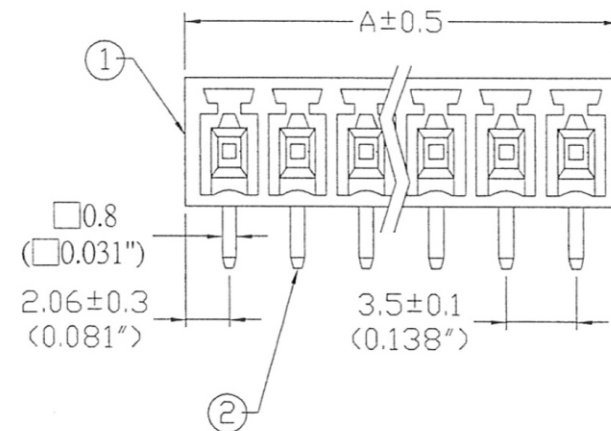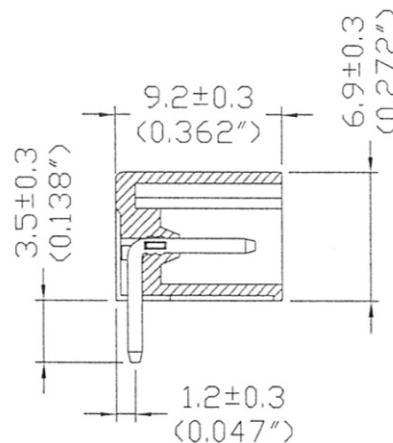

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

X. ±

.X ±

.XX ±

.XXX ±

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

TBX035-PRB-xx-LF

SERIES

LEADFREE

02~22 WAY

BOX
 DIP 90°
 MALE

DESCRIPTION: