






$$\text{DIM A} = (N-1) \times 3.5 + 5.3$$

$$\text{DIM B} = (N-1) \times 3.5$$

N=number of poles



DIM	TOL		
	2P-6P	7P-12P	13P-16P
Dim A	±0.10	±0.15	±0.20
Dim B	±0.10	±0.15	±0.20

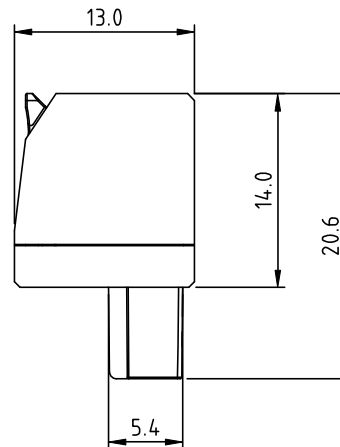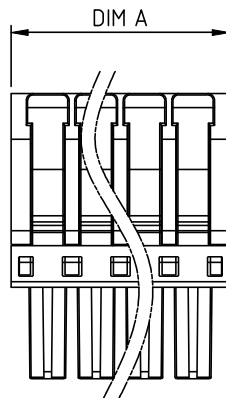

Material:

- Item ㉓ Terminal upper body: Thermoplastic (UL94V-0),
- Item ㉔ Terminal bottom body: Thermoplastic (UL94V-0),
- Item ㉕ Terminal lever: Thermoplastic
- Item ㉖ Terminal Contact: Copper alloy
- Item ㉗ Spring: Stainless,

Electrical: UL1059

- Voltage rating: 300 V
- Current rating: 10A
- Wire range:
 - Solid wire: 24-16AWG
 - Stranded wire: 24-16AWG
- Wire strip length: 10 mm
- Operating temperature: -40°C to +105°C
- Assembling temperature: -5°C to +105°C
- Safety Approval:

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ± 0.50

.X ± 0.30

.XX ± 0.10

.XXX ±

ANG ± 1°

照片框

ORDER INFORMATION

TBX035-SVCD-xx-LF

SERIES

II

II

II

II

II

II

II

II

II

II

II

II

II

II

II

II

II

II

II

II

II

II

II

II

LEADFREE
02~16WAY
D TYPE
CAGE
SCREW 180°
FEMALE

DESCRIPTION: