
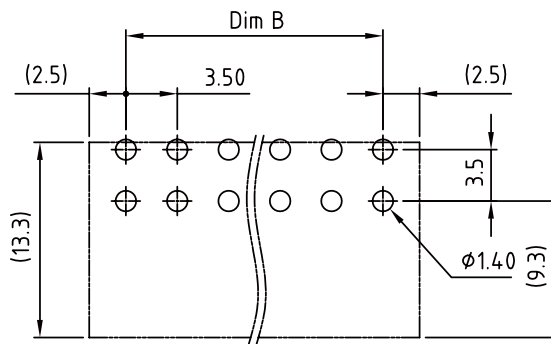
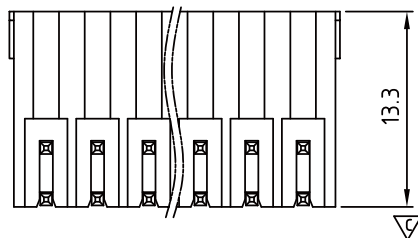
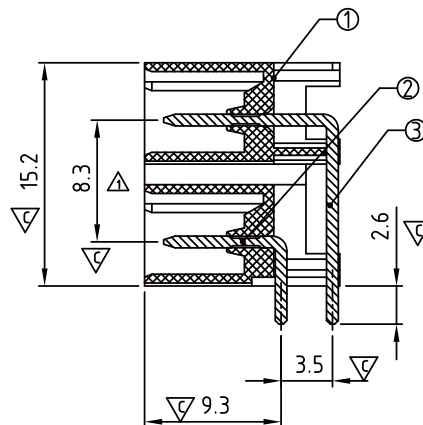


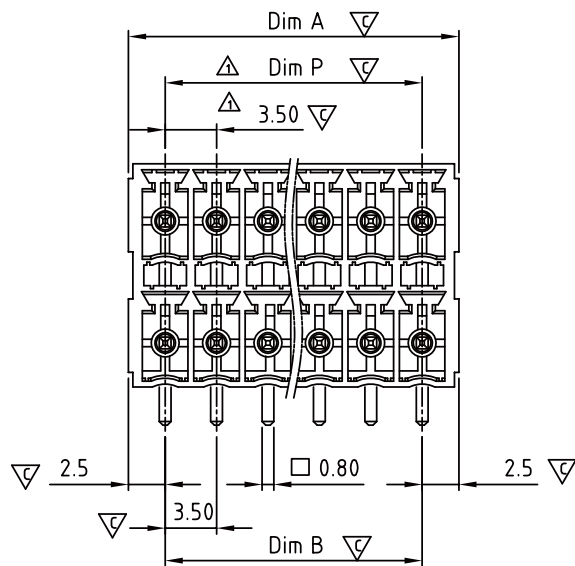

PCB Layout

Material:

- Item ① Terminal(housing): High temp. polyamide (UL94V-0)
- Item ② Contact pin of short: copper Tin plated
- Item ③ Contact pin of long: copper Tin plated

Electrical:

cULus

- Voltage rating: 160V
- Current rating: 5.5A
- Withstanding Voltage: 1.32 KV
- Operating temperature: -45°C to +130°C
- Soldering temperature: 280°C ,10 Sec
- APPROVAL:
- Critical dimension:

N=NUMBER OF CONTACTS

DIM	TOL		
	2×2P--2×6P	2×7P--2×12P	2×13P--2×16P
Dim A	$(N/2-1) \times 3.5 + 5.0$		
Dim B	$(N/2-1) \times 3.5$		
Dim P	$(N/2-1) \times 3.5$		
	±0.15	±0.20	±0.25

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ± 0.50
.X ± 0.30
.XX ± 0.10
.XXX ±
ANG ±

照片框

ORDER INFORMATION

TBX035B1-PRC-xx-LF

SERIES

LEADFREE
02 PER ROW (2+2:04 PIN)
16 PER ROW (16+16:32 PIN)
CAGE
DIP 90°
MALE

煜倫股份有限公司

www.morethanall.com

DESCRIPTION: