
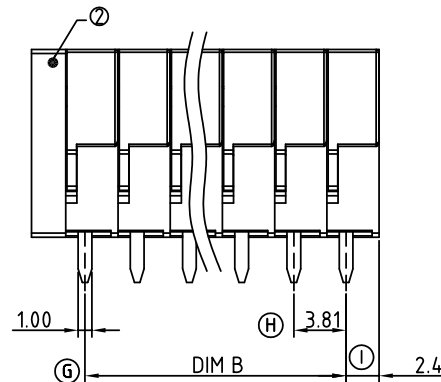
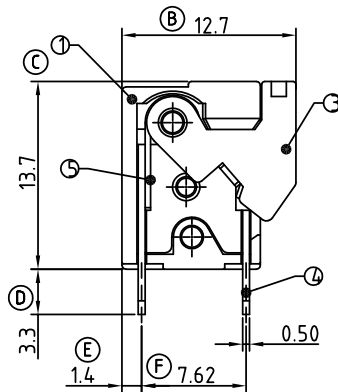
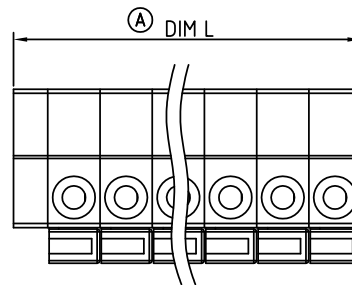


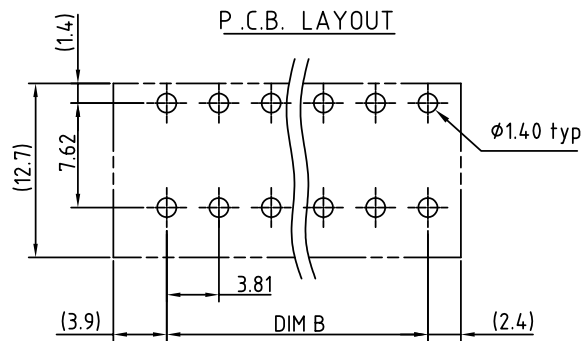

Material

- Item① Terminal body Thermoplastic (UL94V-0)
- Item② Terminal cover Thermoplastic (UL94V-0)
- Item③ Terminal lever Thermoplastic (UL94V-0)
- Item④ Solder pin Brass, Tin plated
- Item⑤ Spring clamp Stainless steel

Electrical cULus

- Voltage rating: 300VAC
 - Current rating: 6A
 - Wire range:
 - Solid wire(AWG): 16-26
 - Stranded wire(AWG): 16-26
 - Withstanding Voltage: 1.6KV
 - Operating temperature: -40°C to +115°C
 - Soldering temperature: 250°C±10°C/5 Sec
- △ ● Safety Approval:

Poles	02	03	04	05	06	07	08	09	10	11	12	13
Dim L	10.12	13.93	17.74	21.55	25.36	29.17	32.98	36.79	40.60	44.41	48.22	52.03
Dim B	3.81	7.62	11.43	15.24	19.05	22.86	26.67	30.48	34.29	38.10	41.91	45.72
TOL	±0.10				±0.15				±0.20			
Poles	14	15	16	17	18	19	20	21	22	23	24	
Dim L	55.84	59.65	63.46	67.27	71.08	74.89	78.70	82.51	86.32	90.13	93.94	
Dim B	49.53	53.34	57.15	60.96	64.77	68.58	72.39	76.20	80.01	83.82	87.63	
TOL	±0.20		±0.25				±0.30					

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ± 0.50
.X ± 0.30
.XX ± 0.10
.XXX ±
ANG ±

照片框

ORDER INFORMATION

TBX038-D13-xx-LF

SERIES

LEADFREE

02~24 WAY

HIGH 13.7mm

DIP 180°

DESCRIPTION: