




P.C.B. LAYOUT(REF)

ITEM	NAME OF PART	Q'TY	MATERIAL
5	LEVEP	P	POM
4	END COVER	1	PA66(V0)
3	SOLDER PIN	P	COPPER
2	CLAMP	P	STEEL
1	HOUSING	P	PA66(V0)

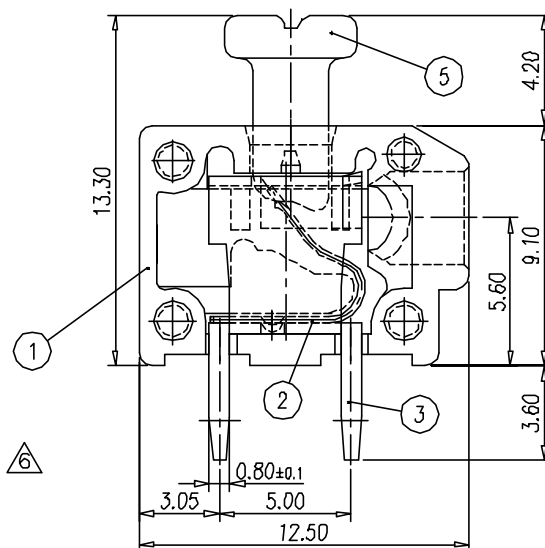

NOTES:

- Rating: 300V 10A (IEC 250V 17.5A) $\triangle$
PITCH: 3.96mm
- Insulation Withstands Voltage:
AC 1500 V/MIN
- Insulation Resistance:
500M Ω or more at DC500V
- Using Temperature Range:
-40°C~+105°C
- Suitable Electric Wire: 20~14AWG (IEC 0.5~1.5mm²)
- Undimensioned Tolerances:

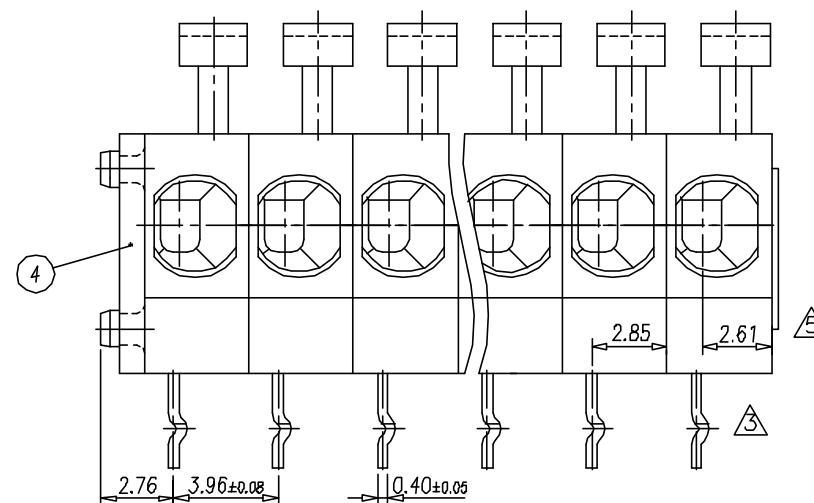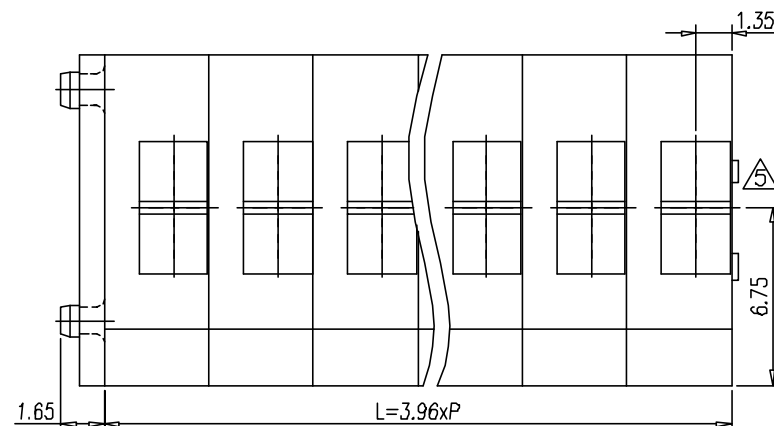

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION $\rightarrow$

X. $\pm$
.X $\pm$
.XX $\pm$
.XXX $\pm$
ANG $\pm$

照片框

ORDER INFORMATION

TBX039-R13-xx-LF

SERIES

LEADFREE

02~24 WAY

HIGH 13.3mm

DIP 90°

DESCRIPTION: