

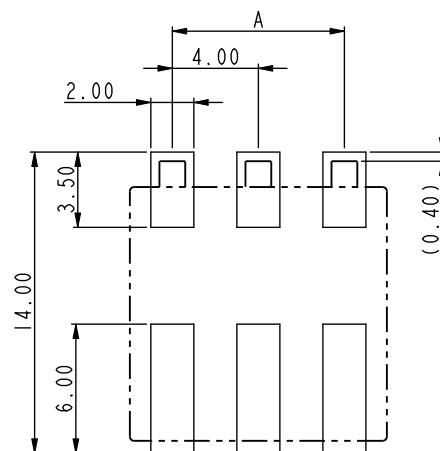
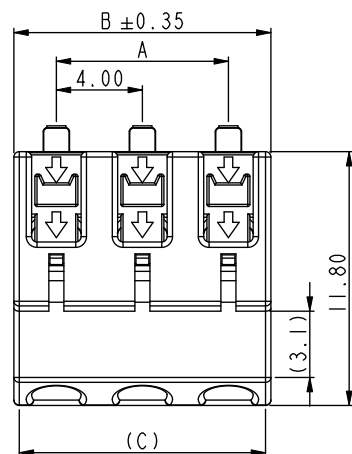



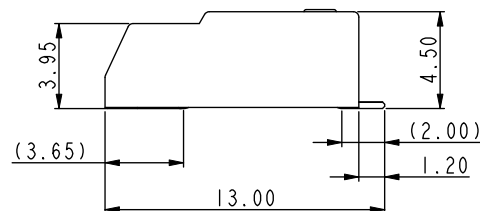

TOLERANCE: ± 0.05
RECOMMENDED P.C.B. Layout
TOP VIEW

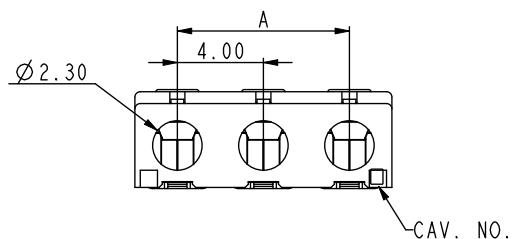

NOTES

1. MATERIAL
INSULATION: NYLON 9T, UL94-V0 (HALOGEN FREE)(CREAM)
COVER: NYLON 9T, UL94-V0 (HALOGEN FREE)(CREAM)
CONTACT: COPPER ALLOY, $t=0.30$
2. CONTACT FINISH: TIN PLATED OVER NICKEL
3. APPLICABLE WIRE RANGE:
(OUTSIDE WIRE INSULATION: 2.1mm DIAMETER MAX.)
SOLID WIRE: AWG#24~#18
STRAND WIRE: AWG#22~#20

PIN	DIM. (mm)		
	A	B	C
01	--	3.95	3.45
02	4.00	7.95	7.45
03	8.00	11.95	11.45

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, $\pm$
.X ± 0.25
.XX ± 0.15
.XXX $\pm$
ANG $\pm 3^\circ$

PPOJECTION

照片框


ORDER INFORMATION

TBX040-W04R-xx-LF

SERIES

LEADFREE
01~03 WAY
REEL
HIGH 4.5mm
90°SMT

DESCRIPTION: WIRE TO BOARD PITCH 4.00mm, RIGHT ANGLE SMT TYPE, ASSEMBLY

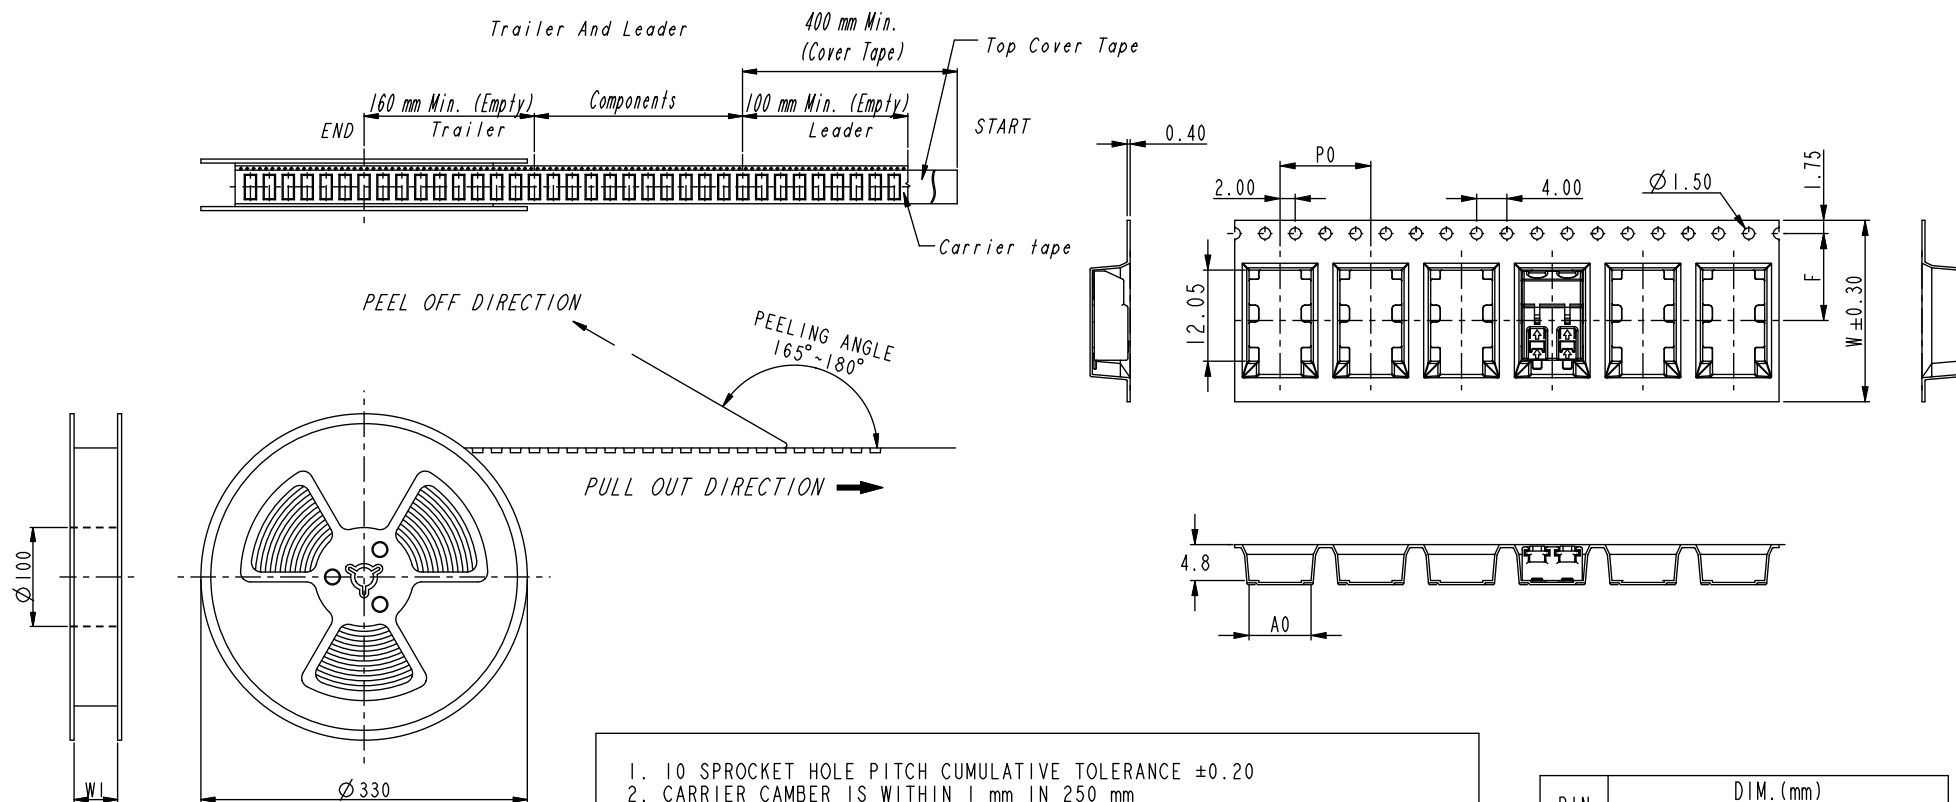

1. 10 SPROCKET HOLE PITCH CUMULATIVE TOLERANCE ± 0.20
2. CARRIER CAMBER IS WITHIN 1 mm IN 250 mm
3. THE TOTAL TEARING CONTROL RANGE OF TOP COVER TAPE IS 10~130g, REFERENCE SPEC: EIA-481-D
4. PEELING SPEED: 300mm/MINUTES, REFERENCE SPEC: EIA-481-D
5. MATERIAL: TRANSPARENT CONDUCTIVE POLYSTYRENE ALLOY.(UP-5000)
6. ALL DIMENSIONS MEET EIA-481-D REQUIREMENTS
7. THICKNESS : 0.40 ± 0.05 mm
8. COMPONENT LOAD PER 13" REEL : SEE PACKING CAPACITY

PIN	DIM. (mm)				
	P0	A0	F	W	WI
01	8.00	4.20			
02	12.00	8.20	11.50	24.00	24.50
03	16.00	12.20			

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, $\pm$
.X ± 0.25
.XX ± 0.15
.XXX $\pm$
ANG $\pm 3^\circ$

PPOJECTION

照片框






ORDER INFORMATION

TBX040-W04R-xx-LF

SERIES

LEADFREE
01~03 WAY
REEL
HIGH 4.5mm
90°SMT

DESCRIPTION: WIRE TO BOARD PITCH 4.00mm, RIGHT ANGLE SMT TYPE, ASSEMBLY

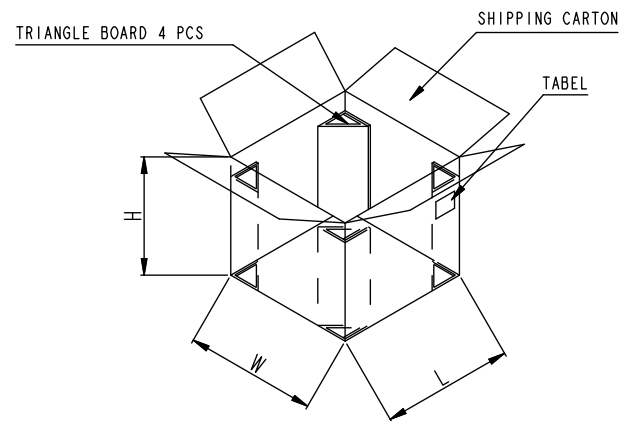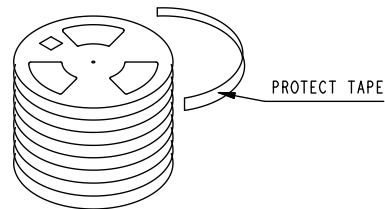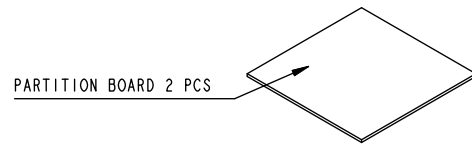

PACKING MATERIAL		PACKING CAPACITY			
PART NAME	DIM. (mm)	PIN	PCS/RE	RE/BC	PCS/BC
REEL	Ø 330*(W+0.5)	01	1,500	9	13,500
CARTON	350*350*340	02	1,000	9	9,000
		03	800	9	7,200

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X, ±
.X ± 0.25
.XX ± 0.15
.XXX ±
ANG ± 3°

PPOJECTION

照片框

ORDER INFORMATION

TBX040-W04R-xx-LF

SERIES

LEADFREE
01~03 WAY
REEL
HIGH 4.5mm
90°SMT

DESCRIPTION: WIRE TO BOARD PITCH 4.00mm, RIGHT ANGLE SMT TYPE, ASSEMBLY