
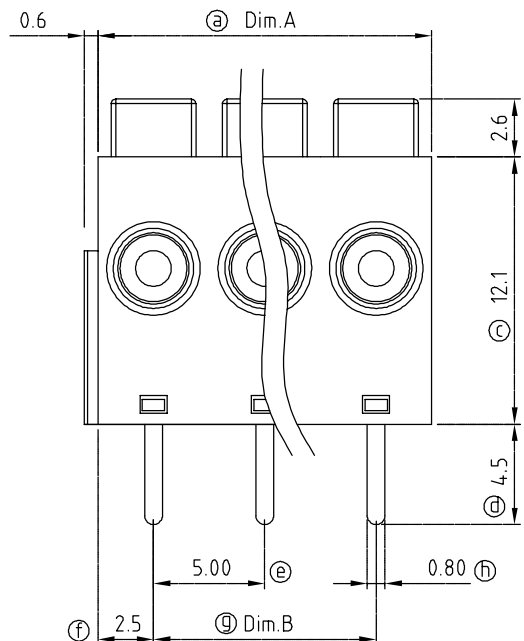


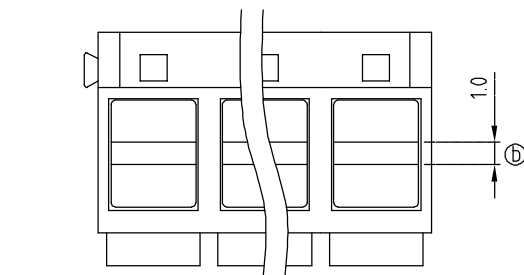


N=NUMBER OF CONTACTS

Dimension

Dim.A	Nx5.0
Dim.B	(N-1)x5.0

N=Number of poles

Poles	Tol
2p-8p	±0.20
9p-16p	±0.30
17p-24p	±0.40

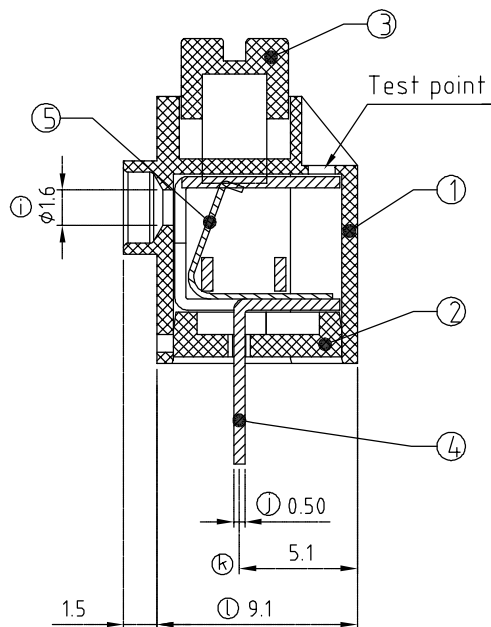


Material

Item 1	Insulating body	Thermoplastic (UL94V-0)
Item 2	Insulating cover	Thermoplastic (UL94V-0)
Item 3	Insulating lever	Thermoplastic (UL94V-0)
Item 4	Contact pin	Brass, Tin plated
Item 5	Spring clamp	Stainless steel

Electrical cULus

- Voltage rating: 300VAC
- Current rating: 7A
- Wire range:
- Solid wire(AWG): 18-22
- Stranded wire(AWG):
- Wire strip length: 7-7.5mm
- Withstanding Voltage: 1.6KV
- ▲ Operating temperature: -40°C to +115°C
- ▲ Soldering temperature: 250°C±10°C/5 Sec
- Safety Approval: cULus

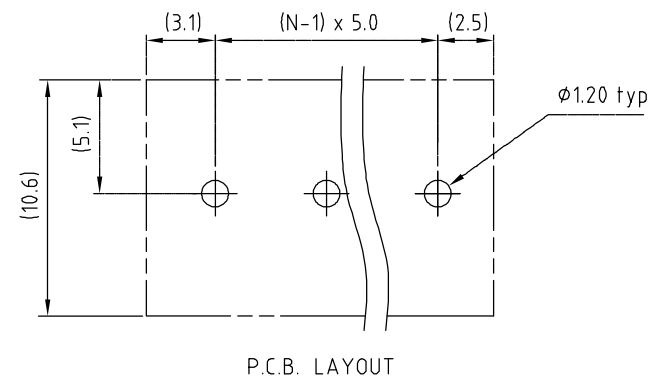

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ± 0.50

.X ± 0.30

.XX ± 0.10

.XXX ±

ANG ± 1°

PPOJECTION

照片框

ORDER INFORMATION

TBX050-D14A-xx-LF

SERIES

LEADFREE

02~24WAY

DSLANT

HIGH 14.7mm

DIP180°

DESCRIPTION: