

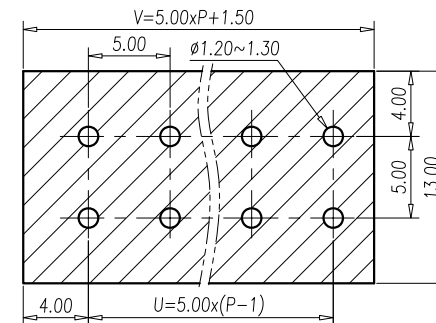
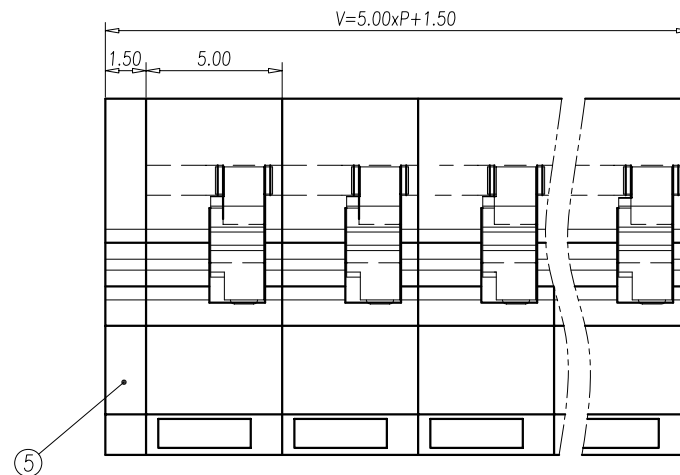


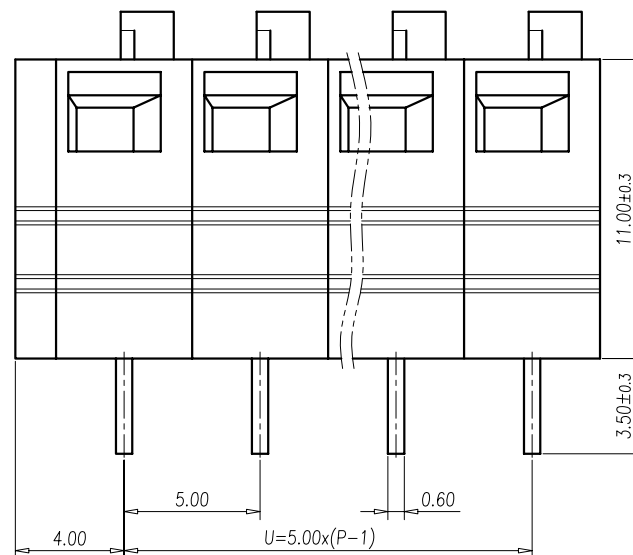

PCB LAYOUT

NOTES:

1. Rating: 300V 10A
PITCH: 5.00mm
2. Insulation Withstands Voltage:
AC 2000V at 1 minute
3. Insulation Resistance:
500MΩ or more at DC500V
4. Using Temperature Range:
-40°C~+105°C
5. Suitable Electric Wire:
SOLID WIRE: AWG 26~14
STRAND WIRE: AWG 26~16
6. 最长 24P
7. RoHS Compliance
8. 剥线长度: 9mm

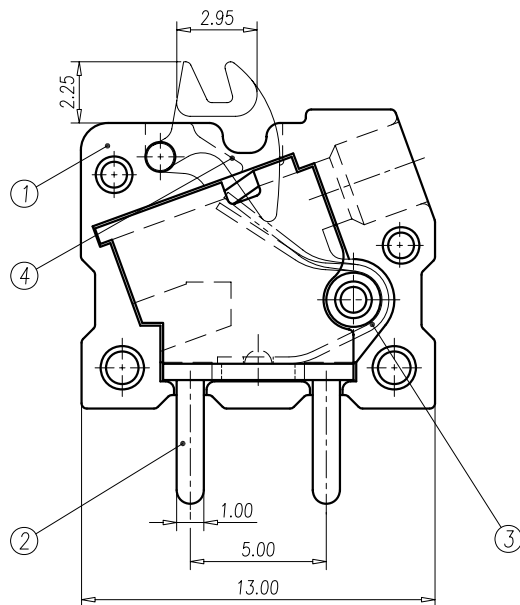

5	COVER	PA66	UL94-V0 GREY
4	LEVER	POM	WHITE
3	CLAMP	STEEL	
2	SOLDER PIN	COPPER ALLOY	Ni Plated
1	HOUSING	PA66	UL94-V0 GREY
ITEM	NAME OF PART	MATERIAL	NOTES

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

TBX050-R11B-xx-LF

SERIES

LEADFREE
01~24WAY
TWO LEG
HIGH 11.0mm
DIP 90°

DESCRIPTION: