
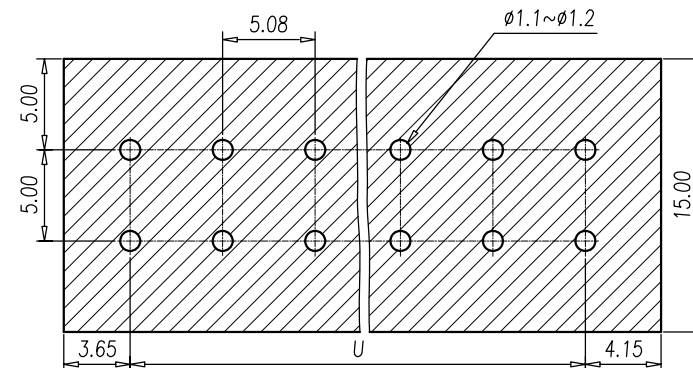


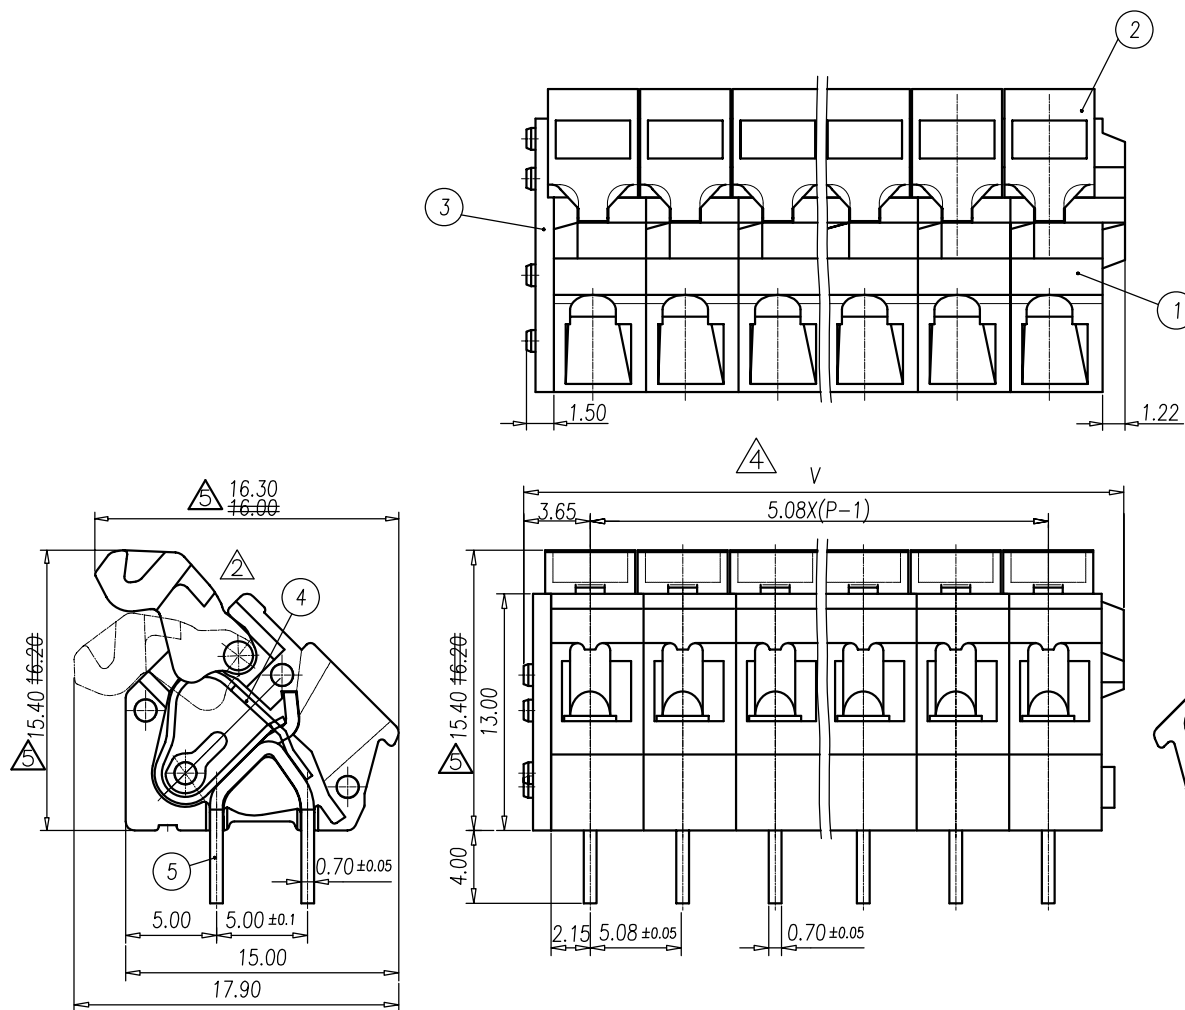

P.C.B. LAYOUT

NOTES:

1. Rating: 300V 15A (IEC 450V 24A)
2. Insulation Withstands Voltage: AC 2500V/MIN
3. Insulation Resistance: 1000MΩ or more at DC500V
4. Using Temperature Range: -40°C~+105°C
5. Suitable Electric Wire: AWG 28~12
6. Undimensioned Tolerances:

—	∩	∇	0.05/10
⊥	//	≡	0.2/10
PITCH ERROR			0.05/10
UNDIMENSIONED TOLERANCES			±0.3

7. RoHS Compliance.

5	SOLDER PIN	P	COPPER	Tin Plated
4	CLAMP	P	SUS301	
3	END COVER	1	PA66	M001
2	LEVER	P	POM	W005
1	HOUSING	P	PA66	M001
ITEM	NAME OF PART	Q'TY	MATERIAL	NOTES

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ±
.XX ±
.XXX ±
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

TBX051-A15-xx-LF

SERIES

LEADFREE

02~24WAY

HIGH 15.4mm

SLANT DIP

DESCRIPTION: