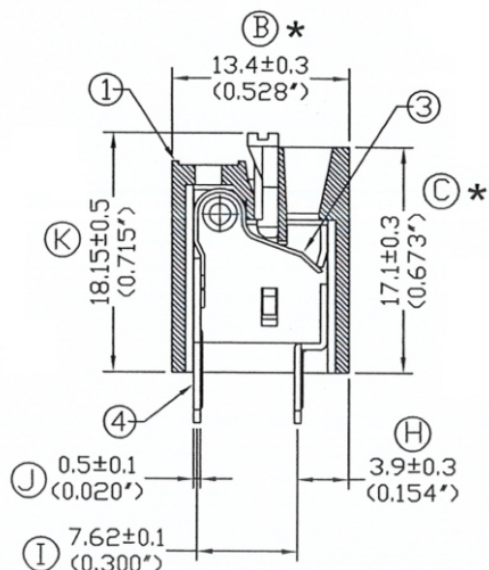




Pitch : 5.08mm (0.200inch)					
Poles	A(mm)	A(inch)	Poles	A(mm)	A(inch)
2	10.16	0.400	15	76.20	3.000
3	15.24	0.600	16	81.28	3.200
4	20.32	0.800	17	86.36	3.400
5	25.40	1.000	18	91.44	3.600
6	30.48	1.200	19	96.52	3.800
7	35.56	1.400	20	101.60	4.000
8	40.64	1.600	21	106.68	4.200
9	45.72	1.800	22	111.76	4.400
10	50.80	2.000	23	116.84	4.600
11	55.88	2.200	24	121.92	4.800
12	60.96	2.400	25	127.00	5.000
13	66.04	2.600			
14	71.12	2.800			

	Material		Plating/Finish	Remark
1	Insulating body	Polyamide 66(UL94V-0)		Green
2	Lever	Polyamide 66(UL94V-0)		Orange
3	Spring	Stainless strip steel		
4	Terminal	Brass	Tin plated	

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES
煜倫股份有限公司

www.morethanall.com

SIZE A4

X. $\pm$
.X $\pm$
.XX $\pm$
.XXX $\pm$
ANG $\pm$

PROJECTION 

照片框

ORDER INFORMATION

TBX051-D18-xx-LF

SERIES

LEADFREE

02~25WAY

HIGH 18.15mm

DIP 180°

DESCRIPTION: