
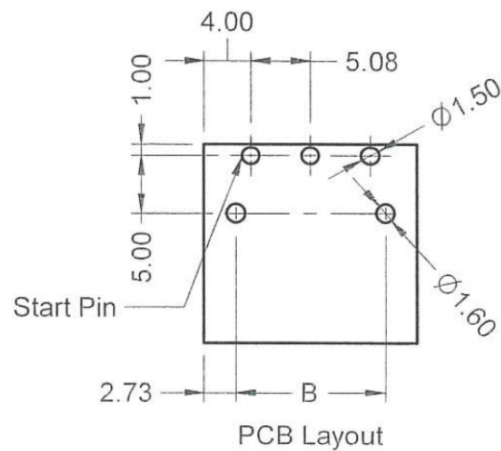
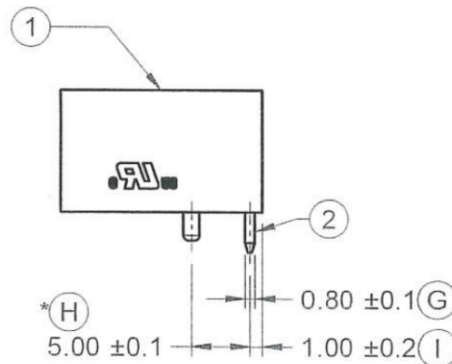
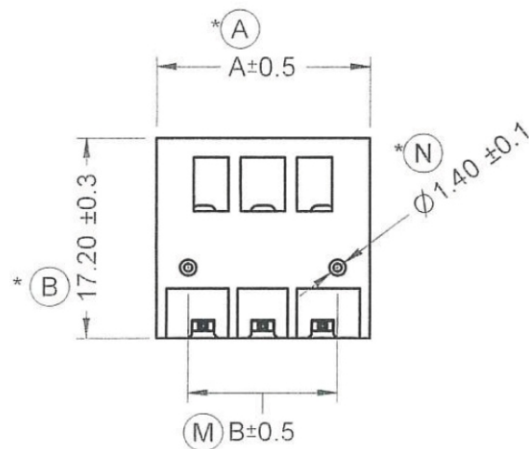


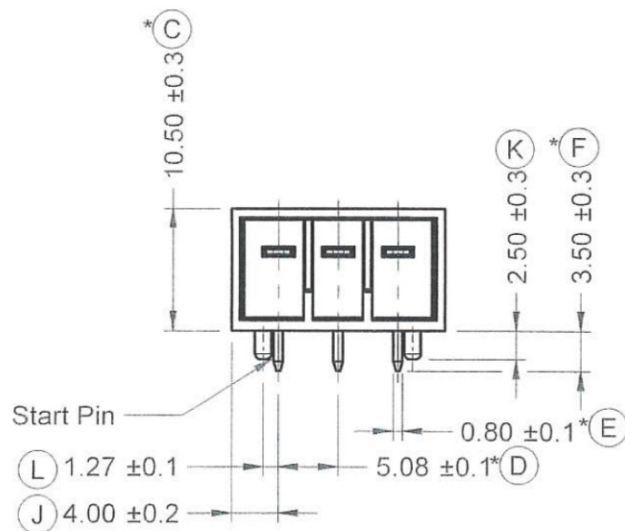

Pitch: 5.08mm (0.20inch)		
Poles	A(mm)	B(mm)
2	13.08	7.62
3	18.16	12.70
4	23.24	17.78

Technical data in accordance to UL/CUL :

Current rating :

16Amp 300V (UG B)

10Amp 300V (UG D)

Insulation withstands voltage : AC1600V 1 minute

Insulation resistance : >2000MΩ DC500V

Technical data in accordance to IEC/ EN :

Rated surge voltage (III/3) : 4kV

Rated surge voltage (III/2) : 4kV

Rated surge voltage (II/2) : 4kV

Rated Insulation voltage (III/3) : 320V

Rated Insulation voltage (III/2) : 320V

Rated Insulation voltage (II/2) : 630V

Rated current : 20A

Operation temperature : -40°C to +105°C

	Material	Plating/Finish	Remark
1	Insulating body	PBT (UL94V-0)	Black
2	Contact	Copper	Tin plated

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

TBX051-PRCLBK-xx-LF

SERIES

MALE

LOCK

CAGE

DIP 90°

LEADFREE
02.03.04 WAY

DESCRIPTION: