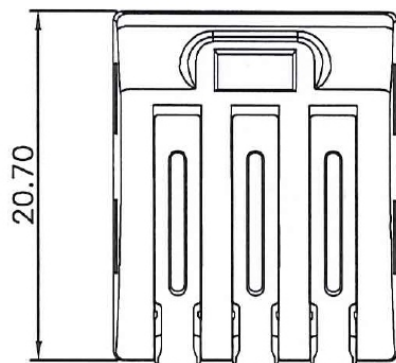
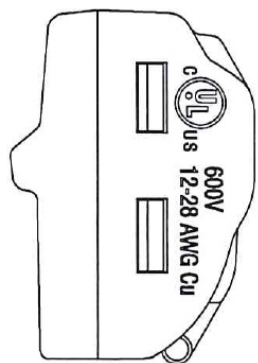


Housing Material : Polycarbonate (PC) and Polyamide (PA), flame-retardant to UL 94-V0

Terminal Insert : (1) Tin-bonded copper

(2) Spring plate: Stainless steel

Current : 32A (IEC)

Voltage : 450V (IEC), 600V (UL)

Working Temp : T85 (IEC), 105° C (UL)

Stripping Length : 10mm (0.39inch)

Wire Range : 0.2 ~ 4.0mm² Rigid/Flexible (IEC)

#28-#14 AWG, Sol/Str, #12 AWG Sol Cu (UL)

International Approvals

cULus, CE, ENEC, FIMKO, CQC, UKCA

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

TBX056-WOR-03-LF

SERIES

WIRE

03 WAY

ORANGE

LEADFREE

DESCRIPTION: PUSH-IN WIRE CONNECTORS