


SPECIFICATIONS

BODY MATERIAL: THERMOPLASTIC (UL 94V-0).BLACK
 TERMINALS: TIN PLATED BRASS
 LEVER: THERMOPLASTIC (UL 94-V-0),ORANGE
 WIRE RANGE AWG 14-18STR
 RATING: 10AMPERES, 75 VAC
 INSULATION WITHSTANDS VOLTAGE AC 1500V/MIN
 INSULATION RESISTANCE 500M OR MORE AT DC 500V
 MINMUM 2POLES WIT END WALL

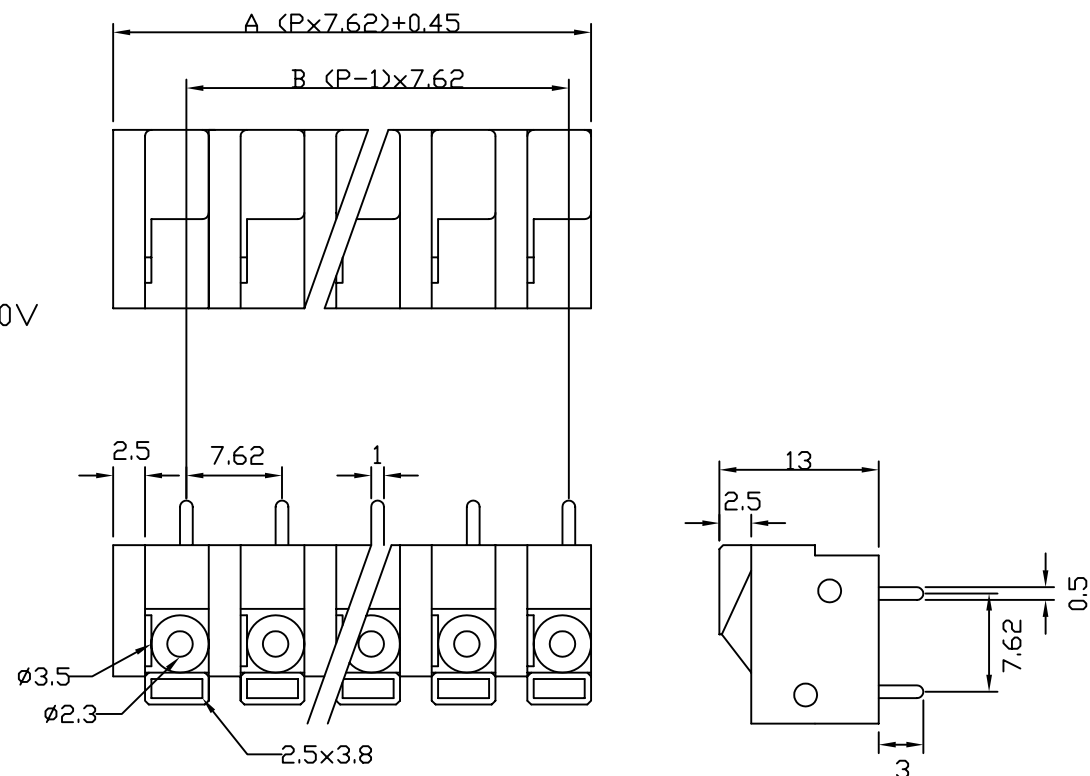

DIMENSION: ± 0.5

POLE	2	3	4	5	6	7	8	9	10	11	12	13	14	15			
A	15.69	23.31	30.93	38.55	46.17	53.79	61.41	69.03	76.65	84.27	91.89	99.51	107.13	114.75			
B	7.62	15.24	22.86	30.48	38.1	45.72	53.34	60.96	68.58	76.2	83.82	91.44	99.06	106.68			
POLE	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32
A	122.37	129.99	137.61	145.23	152.85	160.47	168.09	175.71	183.33	190.95	198.57	206.19	213.81	221.4	229.1	---	---
B	114.3	121.92	129.54	137.16	144.78	152.4	160.02	167.64	175.26	182.88	190.5	198.12	205.74	213.4	221	---	---

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ± 0.30
 .X ± 0.30
 .XX ± 0.20
 .XXX ± 0.10
 ANG $\pm 1^\circ$



ORDER INFORMATION

TBX076-R13-xx-LF

SERIES

LEADFREE

02~24WAY

HIGH 13.0mm

DIP 90°

DESCRIPTION: PITCH 7.62mm