

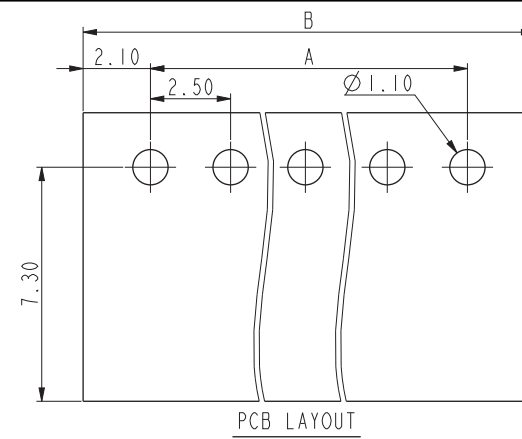

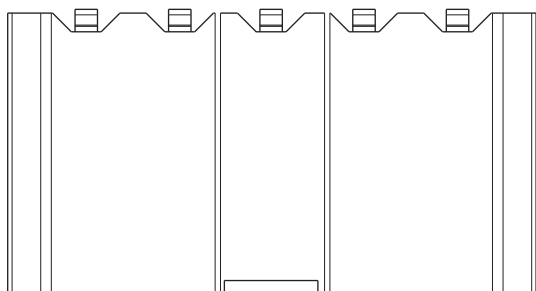


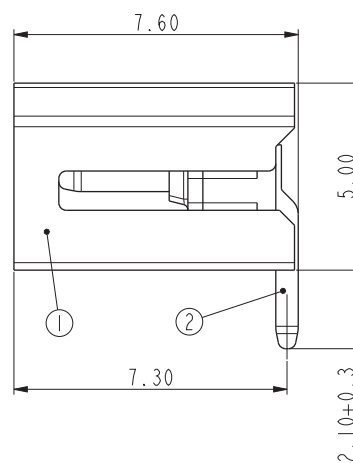

2	SOLDER PIN	COPPER ALLOY	Tin PLATED
1	HOUSING	HIGH-TEMPERATURE PLASTIC	UL94-V0
ITEM	NAME OF PART	MATERIAL	NOTES

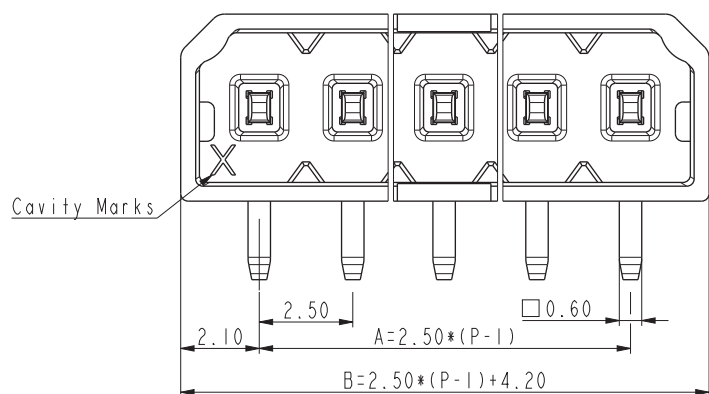

P	2	3	4	5	6	7
A	2.50	5.00	7.50	10.00	12.50	15.00
B	6.70	9.20	11.70	14.20	16.70	19.20
P	8	9	10	11	12	
A	17.50	20.00	22.50	25.00	27.50	
B	21.70	24.20	26.70	29.20	31.70	

Total Pitch Tolerances	Normal dimension Tolerances
0~30 ±0.20	0~30 ±0.25
over 30~53 ±0.25	over 30~53 ±0.30
over 53~70 ±0.30	over 53~70 ±0.35
over 70~90 ±0.35	over 70~90 ±0.44
over 90~115 ±0.44	over 90~115 ±0.55
over 115~150 ±0.55	over 115~150 ±0.70
over 150~200 ±0.70	over 150~200 ±0.85
over 200~250 ±0.85	over 200~250 ±1.00
over 250~320 ±1.00	over 250~320 ±1.20

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

TBY025-PRBxx-xx-LF

SERIES

MALE

BOX

DIP 90°

LEADFREE

02-12 WAY

BK:BLACK

WH:WHITE

煜倫股份有限公司

www.morethanall.com

DESCRIPTION: