
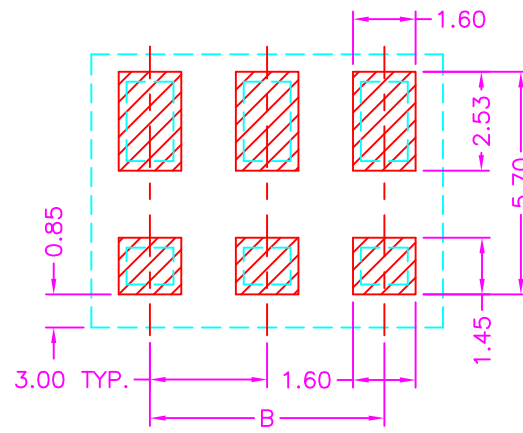
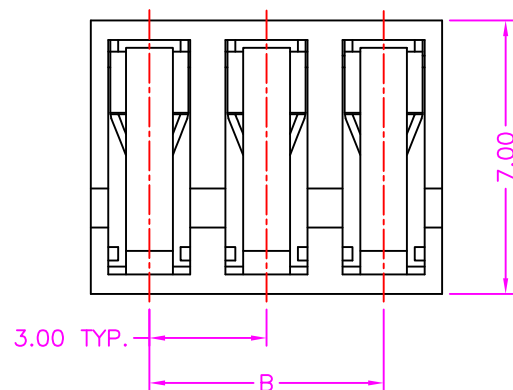
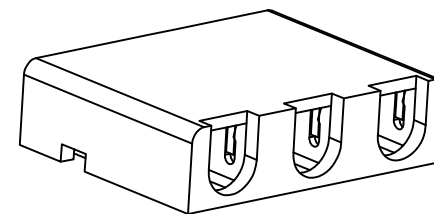


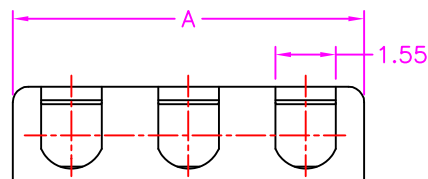


P.C.B. LAYOUT
TOP VIEW ± 0.05

MATERIALS

HOUSING: HI-TEMP. PLASTIC (UL 94V-0), BEIGE
TERMINAL: COPPER ALLOY, TIN PLATING

SPECIFICATION

CURRENT RATING: 2 AMP MAX
DIELECTRIC WITHSTANDING: 800V AC FOR ONE MINUTE
CONTACT RESISTANCE: 20m OHMS MAX
INSULATION RESISTANCE: 800M OHMS MIN AT DC 500V
OPERATION TEMPERATURE: $-40^{\circ}\text{C} \sim +110^{\circ}\text{C}$
APPLICABLE: AWG #22~#26

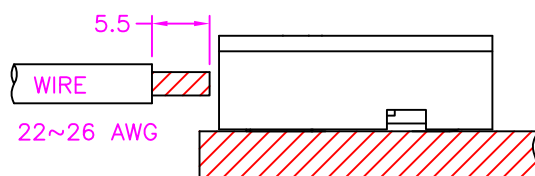

ASSEMBLY

TABLE

POS.	A	B
1	3.00	
2	6.00	3.00
3	9.00	6.00

照片框

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ± 0.40
.X ± 0.30
.XX ± 0.20
.XXX ± 0.10
ANG $\pm$

PPOJECTION

ORDER INFORMATION

TBY030-W024R-xx-LF

SERIES

LEADFREE


01~03 WAY

REEL

HIGH 2.45mm

90°SMT

DESCRIPTION: POKE HOME, 3.00mm PITCH, PCB MOUNT, SMT, FEMALE (AWG #22~#26)

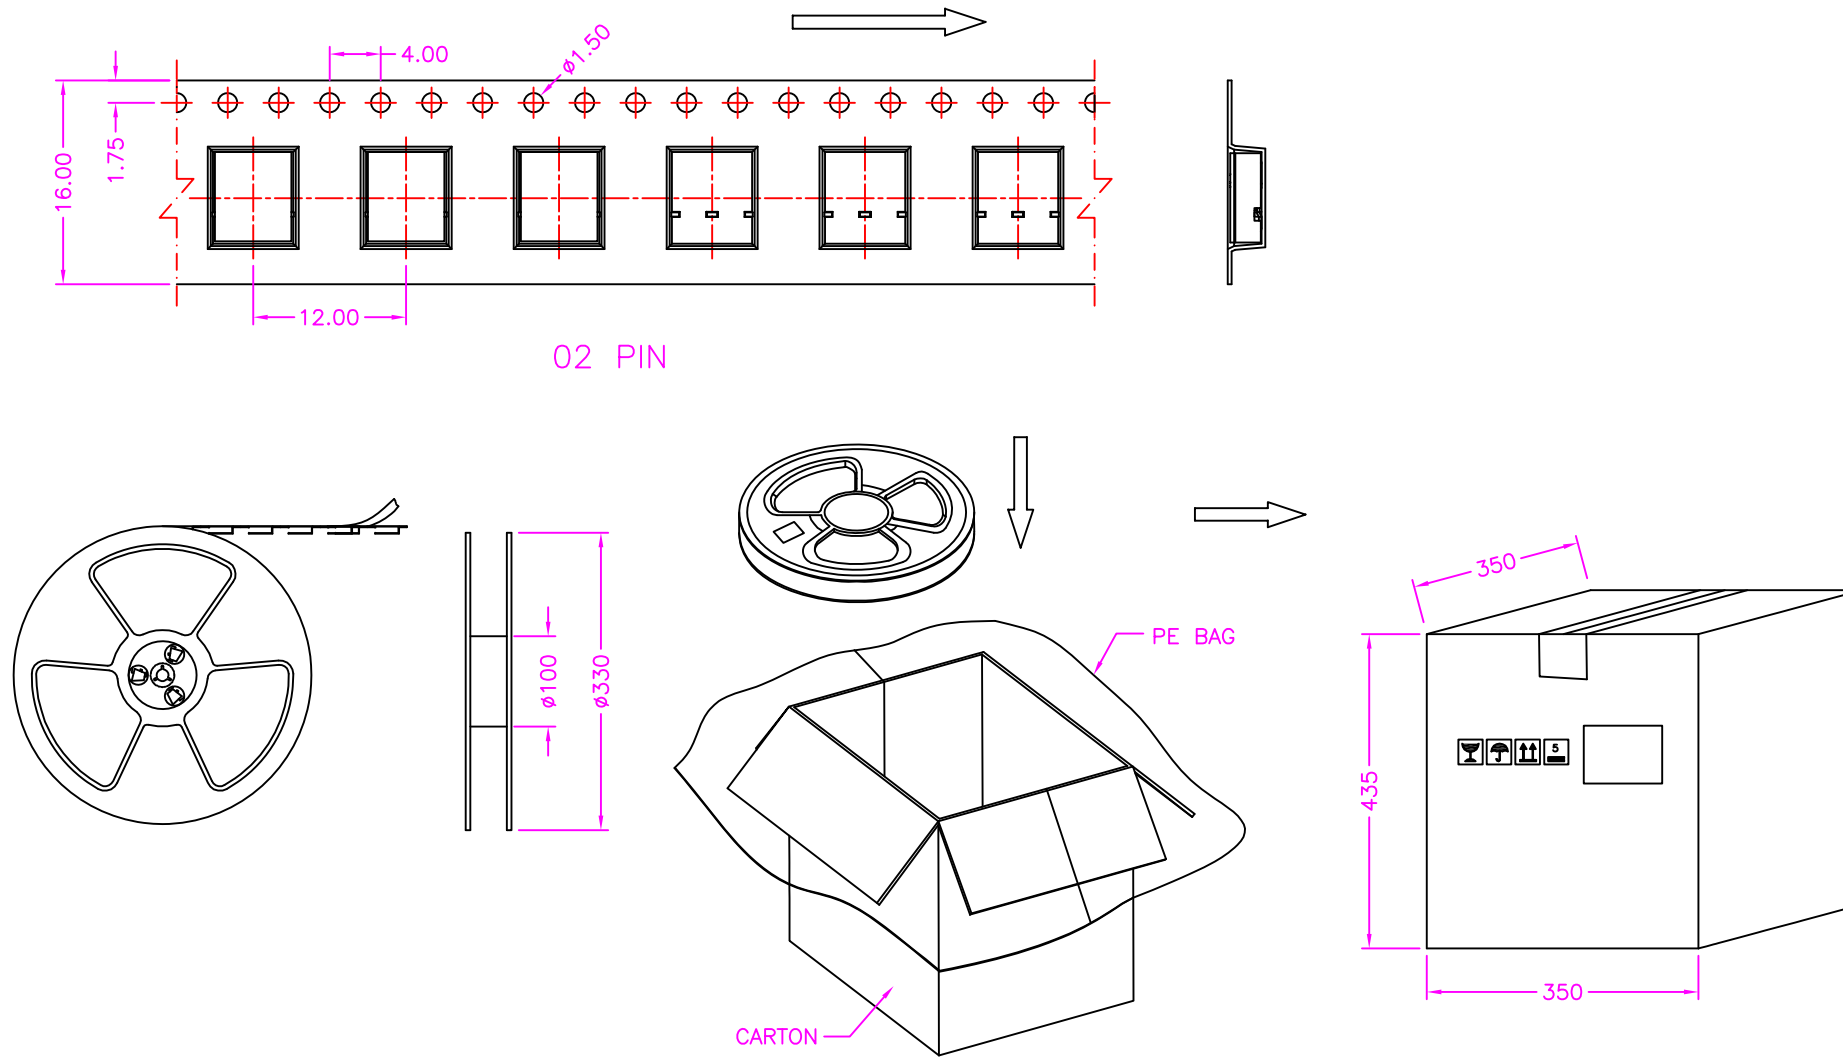

NOTE: 2000PCS/ REEL, 40000PCS/ 20 REEL/CARTON

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. ± 0.40

.X ± 0.30

.XX ± 0.20

.XXX ± 0.10

ANG $\pm$

PPOJECTION

照片框

ORDER INFORMATION

TBY030-W024R-xx-LF

SERIES

LEADFREE

01~03 WAY

REEL

HIGH 2.45mm

90°SMT

DESCRIPTION: POKE HOME, 3.00mm PITCH, PCB MOUNT, SMT, FEMALE (AWG #22~#26)