
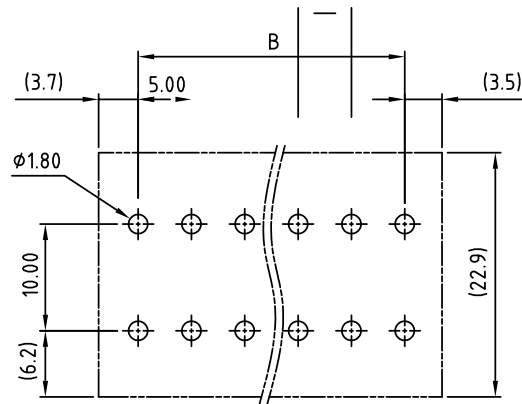
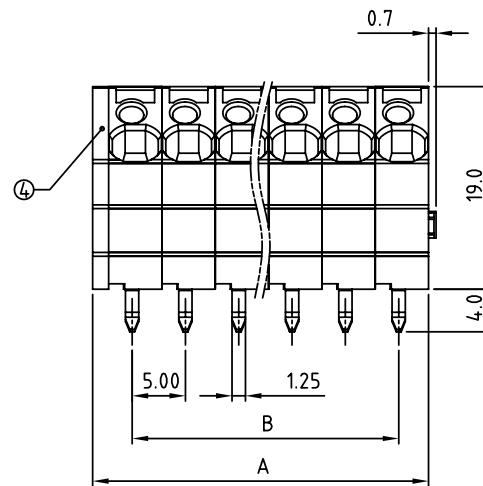


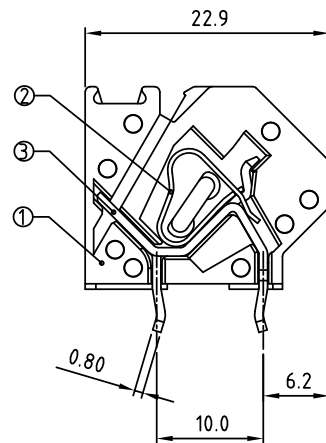

PCB Layout

Material:

- Item ① Insulator(housing): Thermoplastic (UL94V-0)
- Item ② Spring clamp: Stainless steel
- Item ③ Terminal Body(contact pin): Brass.
- Item ④ Insulator(Cover): Thermoplastic (UL94V-0)

Electrical: cULus

- Voltage rating: 300V
- Current rating: 10A
- Wire range:
- Solid wire(AWG): 12-28
- Stranded wire(AWG): 12-28
- Wire strip length: 8-9mm
- Withstanding Voltage: 1.6KV
- Operating temperature: -40°C to +115°C
- Soldering temperature: 250°C±10°C/5 Sec
- Safety Approval: 

POLE		2	3	4	5	6	7	8	9	10	11	12
A		11.50	16.50	21.50	26.50	31.50	36.50	41.50	46.50	51.50	56.50	61.50
B		5.00	10.00	15.00	20.00	25.00	30.00	35.00	40.00	45.00	50.00	55.00
Tol.		±0.15					±0.20					
POLE	13	14	15	16	17	18	19	20	21	22	23	24
A	66.50	71.50	76.50	81.50	86.50	91.50	96.50	101.50	106.50	111.50	116.50	121.50
B	60.00	65.00	70.00	75.00	80.00	85.00	90.00	95.00	100.00	105.00	110.00	115.00
Tol.		±0.25					±0.30					

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION 

X. ± 0.50
.X ± 0.30
.XX ± 0.10
.XXX ±
ANG ± 1°

照片框

ORDER INFORMATION

TBY050-A19B10-xx-LF

SERIES

LEADFREE

02~24WAY

10.0mm

HIGH 19.0mm

SLANT DIP

DESCRIPTION: