
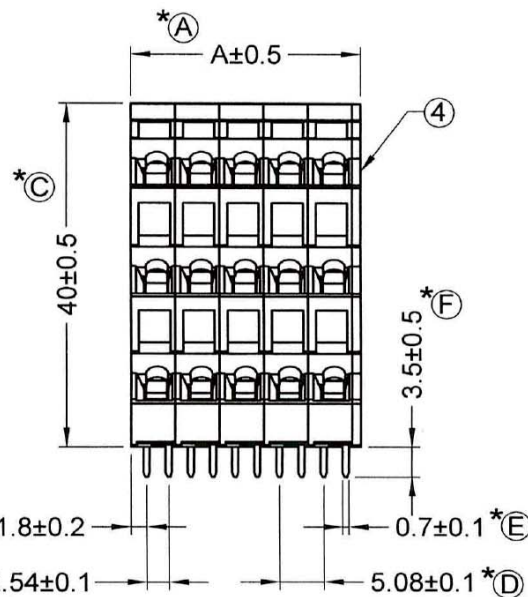

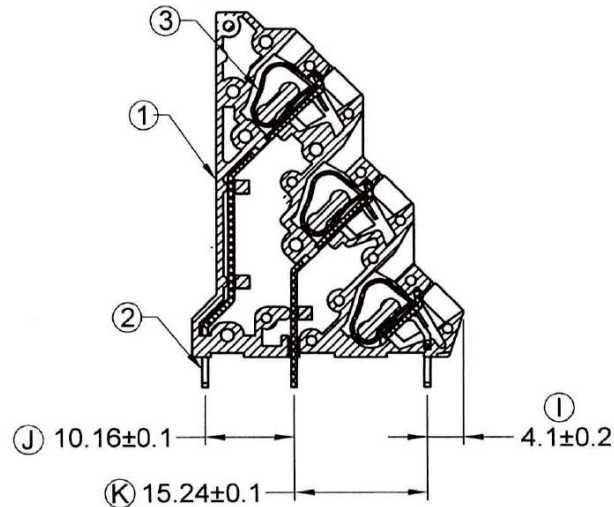


PCB Layout

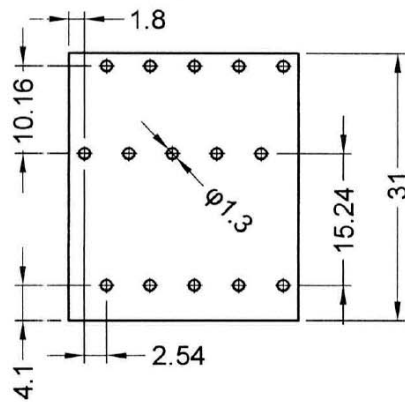

Pitch : 5.08mm (0.200inch)					
Poles	A(mm)	A(inch)	Poles	A(mm)	A(inch)
6	11.16	0.439	45	77.20	3.039
9	16.24	0.639	48	82.28	3.239
12	21.32	0.839	51	87.36	3.439
15	26.40	1.039	54	92.44	3.639
18	31.48	1.239	57	97.52	3.839
21	36.56	1.439	60	102.60	4.039
24	41.64	1.639	63	107.68	4.239
27	46.72	1.839	66	112.76	4.439
30	51.80	2.039	69	117.84	4.639
33	56.88	2.239	72	122.92	4.839
36	61.96	2.439			
39	67.04	2.639			
42	72.12	2.839			

Current rating UL : 10Amp 300V
Insulation withstands volt : AC2000V min
Insulation resistance : >2000MΩ DC500V
Operation temperature : -40°C to +105°C
Wire range : 12~28 AWG
Wire strip length : 5~6mm

	Material	Plating/Finish	Remark
1	Insulating body	Polyamide 66(UL94V-0)	Grey
2	Terminal	Brass	Tin plated
3	Spring	Stainless strip steel	
4	Slide cover	Polyamide 66(UL94V-0)	Grey
5			

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
X, ±
XX, ±
XXX, ±
ANG ±

照片框

ORDER INFORMATION

TBY051C1-A40R-xx-LF

SERIES

LEADFREE

02:06WAY/ROW+ROW+ROW

24:72WAY/ROW+ROW+ROW

ZIGZAG RIGHT #1

HIGH 40.0mm

SLANT DIP

DESCRIPTION: