
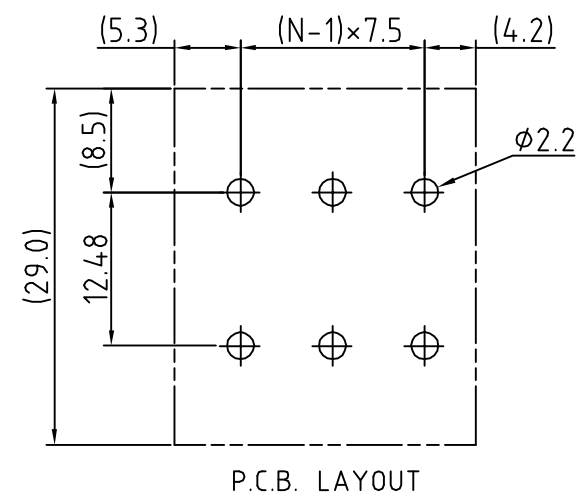
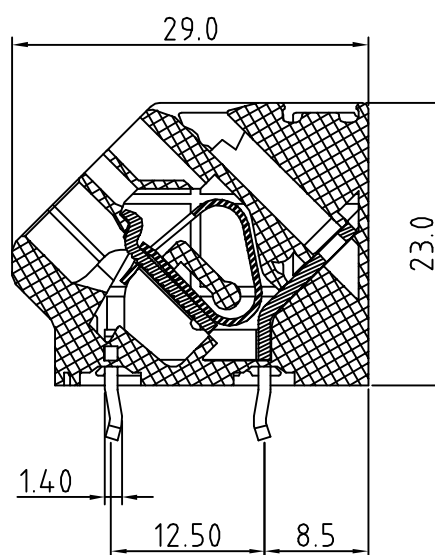


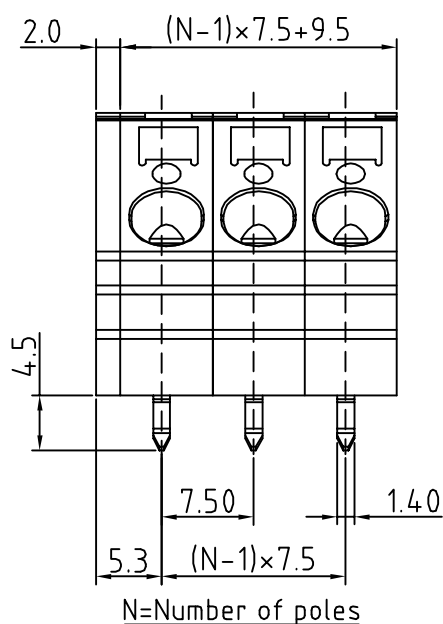

Material:

- Terminal body
- (Contact pin): Brass
- Wire guard: Stainless steel
- Surface of solder tail: Tin plated
- Insulator(housing): Thermoplastic (UL94V-0)

Electrical:	cULus
● Voltage rating:	300V
● Current rating:	10A
● Wire range:	
● Solid wire(AWG):	10-24
● Stranded wire(AWG):	10-24
● Wire strip length:	10-11mm
● Withstanding Voltage:	1.6KV
● Operating temperature:	-30°C to +105°C
● Soldering temperature:	250°C±10°C/5 Sec