


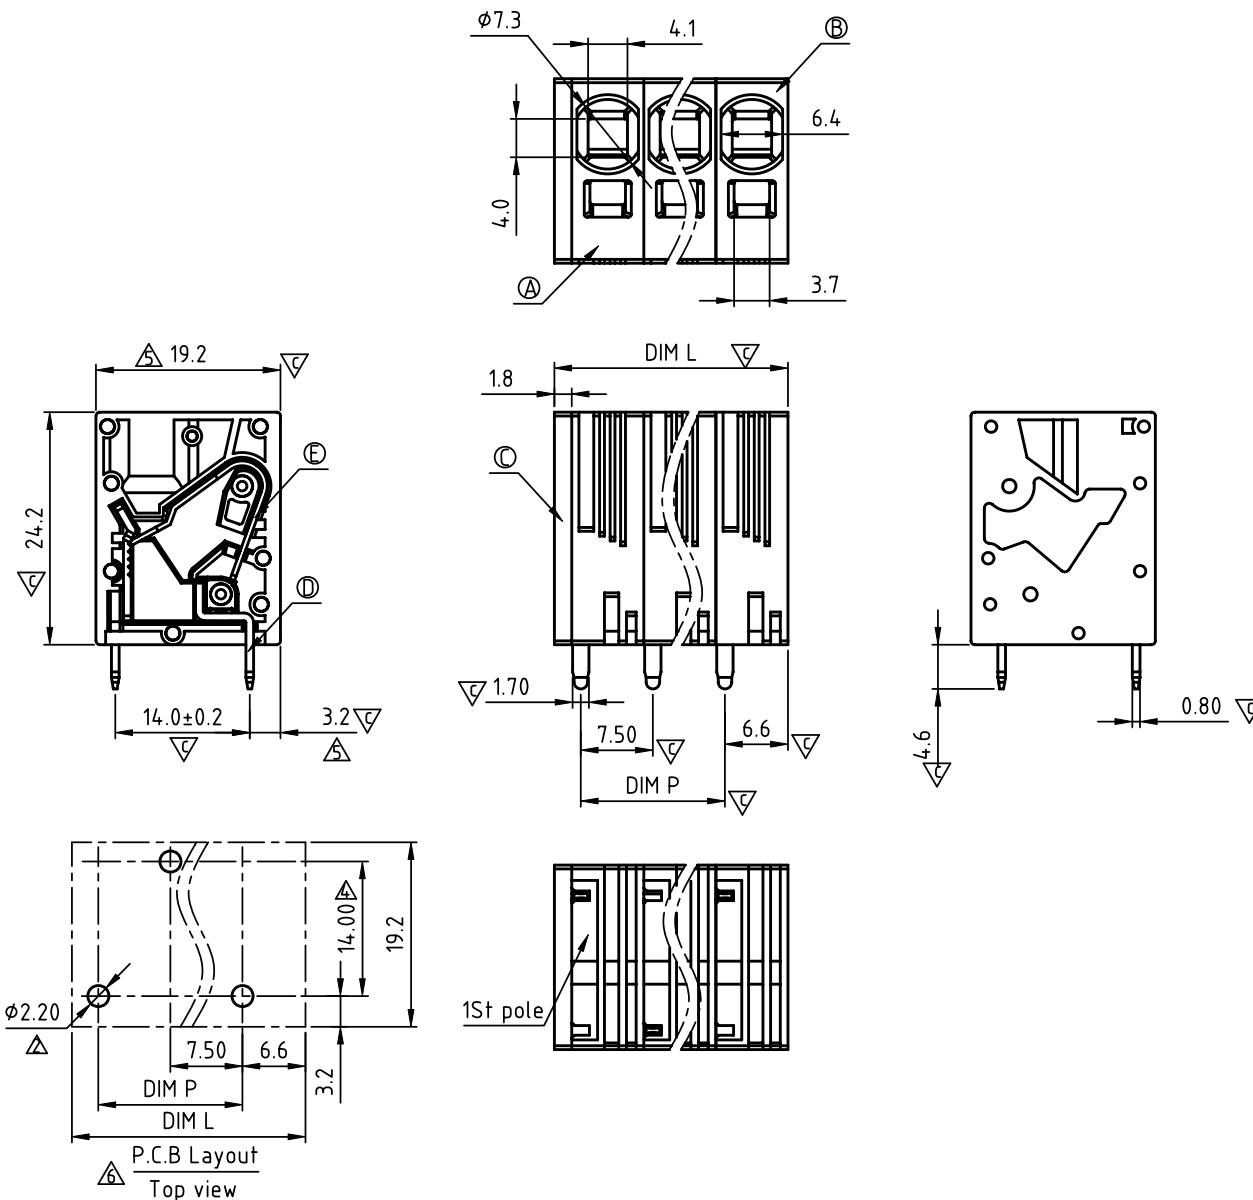

Material:

- Item A Terminal body: Thermoplastic (UL94V-0)
- Item B Terminal side body: Thermoplastic (UL94V-0)
- Item C Terminal cover: Thermoplastic (UL94V-0)
- Item D Contact pin : Copper, Tin Plated.
- Item E Spring clamp : Stainless steel
- Item F Contact pin : Copper, Tin Plated.

- Electrical: cULus
- Voltage rating: 300 V
 - Current rating(Sol): 30 A
 - Current rating(Str): 35 A
 - Solid wire(AWG): 10-24
 - Stranded wire(AWG): 8-24
 - Wire strip length: 15-16 mm
 - Withstanding Voltage: 1.6KV
 - Operating temperature: -40°C to +120°C
 - Soldering temperature: 260°C±5°C/5 Sec
 - Safety Approval: cULus
 - Critical dimension: ∇

N=NUMBER OF POLES ∇

DIM		TOL		
		1P--6P	7P--12P	13P--16P
Dim P	(N-1)×7.5	±0.15	±0.25	±0.35
Dim L	N×7.5+1.8	±0.15	±0.25	±0.35

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION ∇

X. ± 0.50
.X ± 0.30
.XX ± 0.10
.XXX ±
ANG ± 1°

照片框

ORDER INFORMATION

TBY075-D24L-xx-LF

SERIES

LEADFREE
01~16WAY
L TYPE FOOT
HIGH 24.2mm
DIP 180°

DESCRIPTION: