


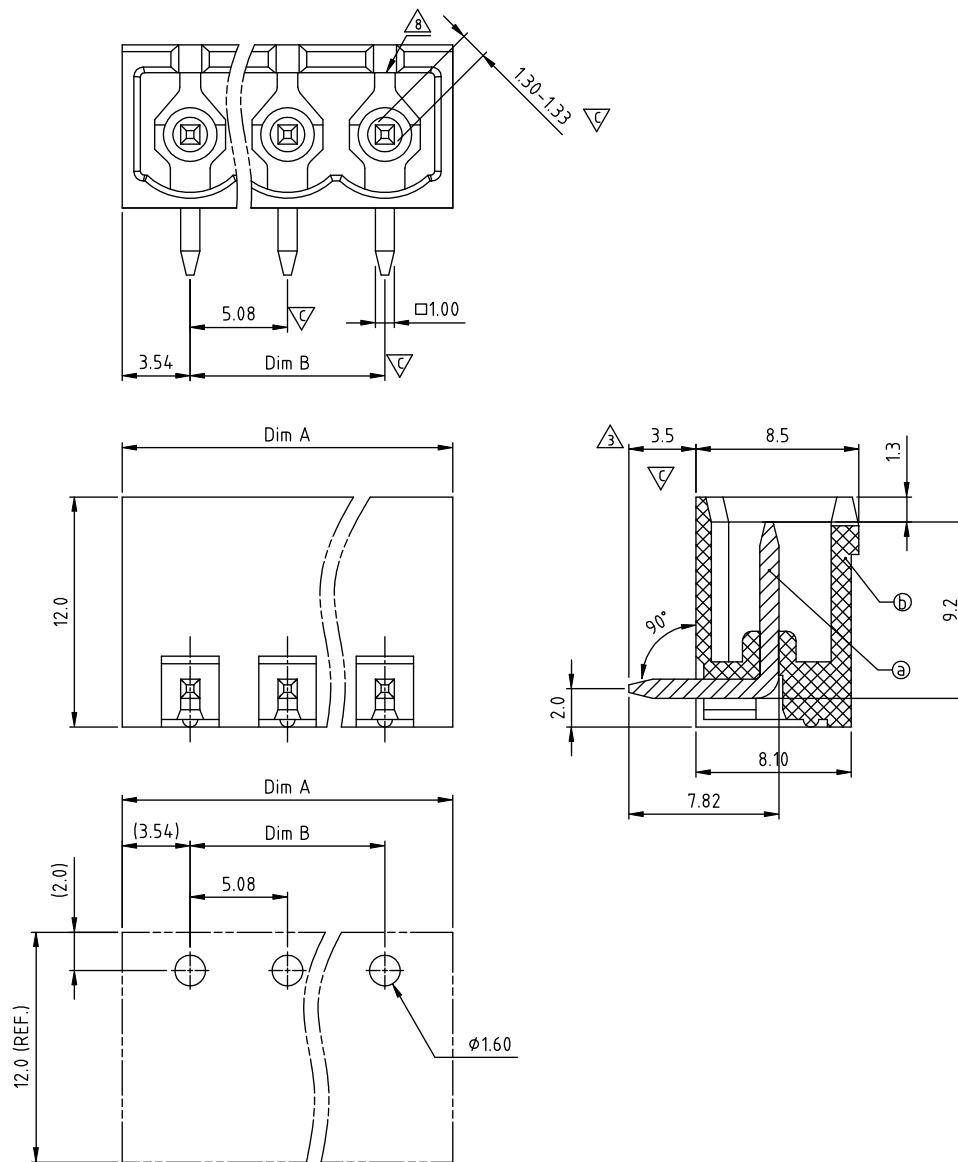

RECOMMENDED PCB LAYOUT

Material:

- Item ③ Male contact pin: Copper Bright Tin plated over Nickel plated
- Item ④ Terminal(housing): Thermoplastic (UL94 V-0)

- Electrical: cULus / VDE / TUV
- Voltage rating: 300V/300V/300V
- Current rating: 20A/20A/20A
- Withstanding Voltage: 1.6 KV/2.5KV/2.5KV
- Operating temperature: -40°C to +115°C
- Soldering temperature: 260°C±5°C/5 Sec

N = Number of poles

Dim A=(N×5.08)+2.0

Dim B=(N-1)×5.08

	Dim A	Dim B
2-6p	±0.15	±0.15
7-12p	±0.25	±0.25
13-18p	±0.30	±0.30
19-24p	±0.40	±0.40

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ± 0.50

.X ± 0.30

.XX ± 0.10

.XXX ±

ANG ± 1°

PPOJECTION

照片框

ORDER INFORMATION

TBY075-PRBGE-xx-LF

SERIES

MALE

BOX

DIP 90°

GREY

LEADFREE

02~24WAY

DESCRIPTION: