

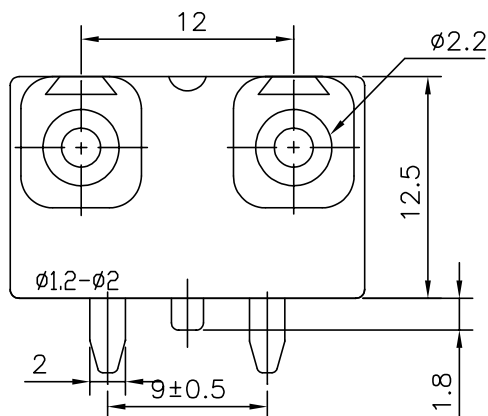
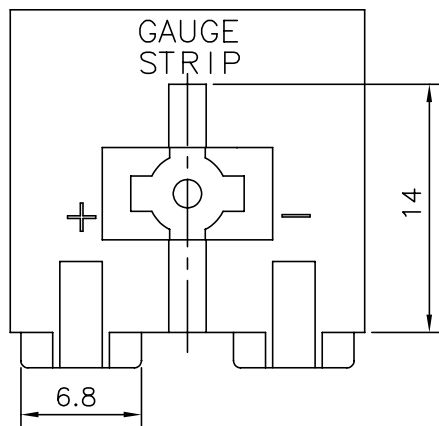


SPECIFICATIONS:

- 1 Pitch: 9 mm
- 2 Wire range: $\phi 1.2\text{mm}$ - $\phi 2.0\text{mm}$ solid.
- 3 No. of pole per Block : 2
- 4 Rated: 20 Amp , 300 VAC.
- 5 Housing: Polybutylene terephthalate , Gray.
- 6 Terminals: Tin plated over Brass
- 7 Push button: Polybutylene terephthalate ,Black.
- 8 Polarity mark: Polyamide 66,Black/Red.
- 9 Contact: stainless steel.

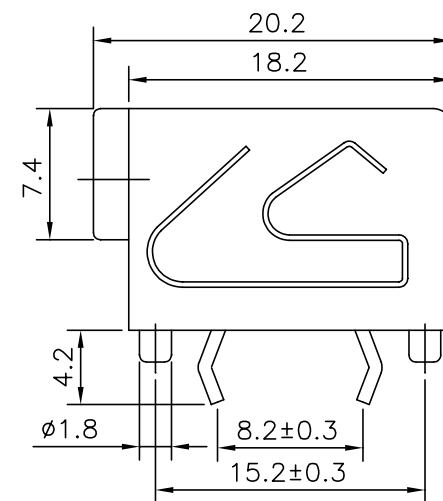

PCB LAYOUT(reference)

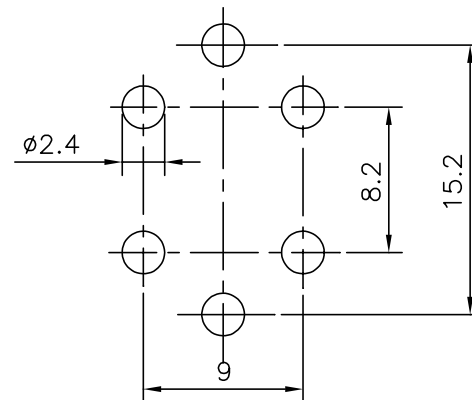

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±

.X ±

.XX ±

.XXX ±

ANG ±

照片框

ORDER INFORMATION

TBY090-R12P-02-LF

SERIES

POST

02 WAY

LEADFREE

HIGH 12.5mm

DIP 90°

DESCRIPTION: