
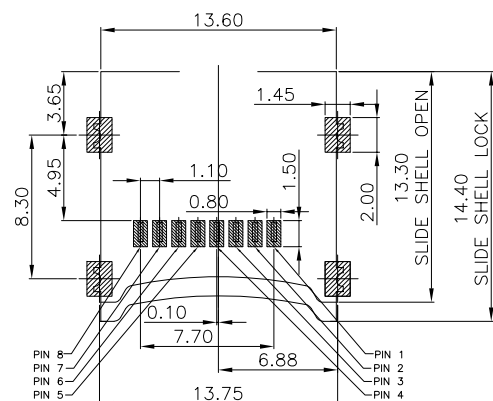
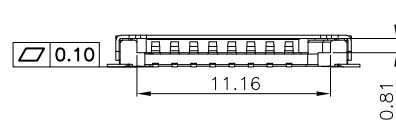


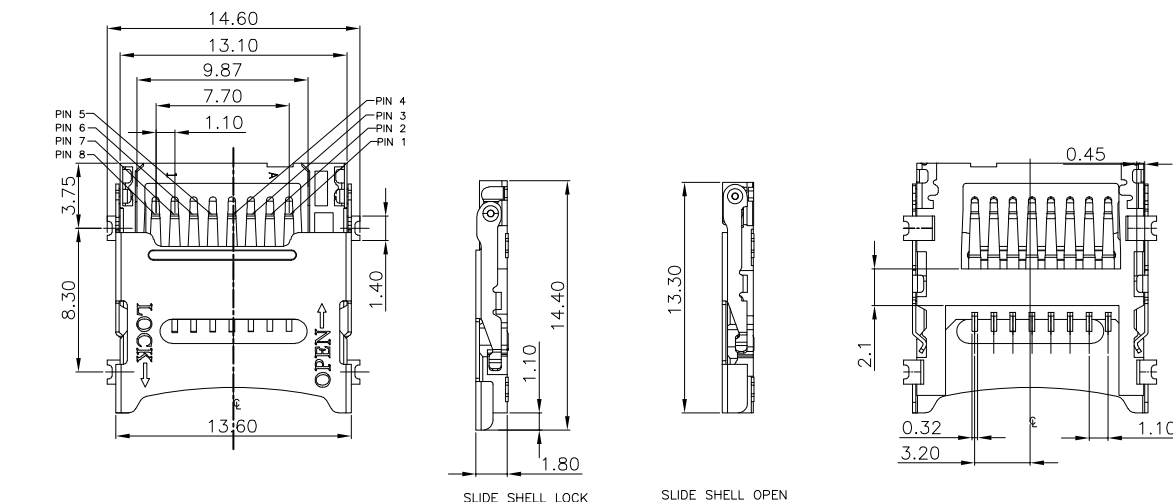

RECOMMENDED PCB LAYOUT
TOLERANCES: ± 0.05


PIN NO.	PIN Assignmeng.
PIN1	DAT2
PIN2	CD/DAT3
PIN3	CMD
PIN4	VDD
PIN5	CLK
PIN6	VSS
PIN7	DAT0
PIN8	DAT1

MATERIALS

HOUSING: HIGH-TEMP. PLASTIC (UL 94V-0), BLACK
SHELL: STAINLESS STEEL
HINGE: COPPER ALLOY NICKEL UNDER MATTE TIN PLATED
TERMINAL: COPPER ALLOY, GOLD PLATED ON CONTACT AREA,
TIN PLATING ON SOLDER TAIL

SPECIFICATION

CURRENT RATING: 1.0 AMP MAX
DIELECTRIC WITHSTANDING: 500V AC FOR ONE MINUTE
CONTACT RESISTANCE: 50m Ω MAX
INSULATION RESISTANCE: 1000M Ω MIN AT DC 500V
OPERATION TEMPERATURE: -20°C~+85°C



照片框

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, $\pm$
.X $\pm$ 0.30
.XX $\pm$ 0.20
.XXX $\pm$ 0.10
ANG $\pm$ 3°

ORDER INFORMATION

TFC-WHC-08-LF
SERIES T T LEADFREE
08WAY
C / LAYOUT
HINGE
90°SMT

DESCRIPTION: MICRO SD (T-FLASH), PCB MOUNT, SMT, METAL
SHIELD, FEMALE, (HINGE TYPE)