



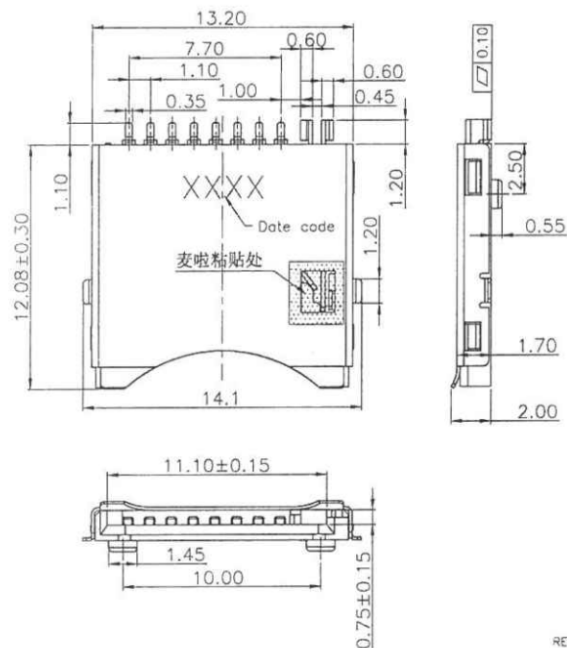


PIN ASSIGNMENT:

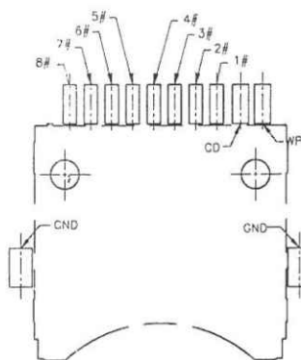

PIN NO.	PIN ASSIGNMENT:
1#	DAT2
2#	CD/DAT3
3#	CMD
4#	VDD
5#	CLK
6#	VSS
7#	DAT0
8#	DAT1

Micro SD Card Insert Drawing (Recommend):

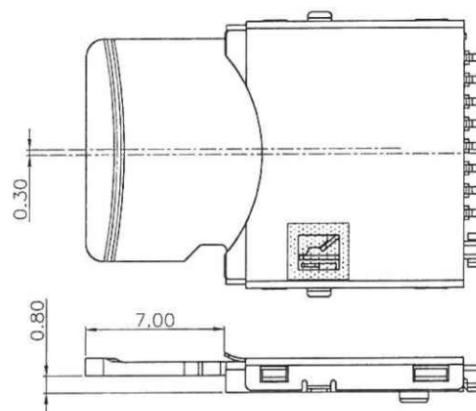

NOTES:

MATERIAL:

Insulator: High Temperature Thermoplastic,
Color Black ,UL 94V-0.

Contact: Phosphor-Bronze

Shell: Phosphor-Bronze Δ

PLATING:

Contact: Plated 50u" Ni Overall

Plated Au Selective Contact Area

Plated 100u" Sn Over Ni On Solder Area

Shell: Plated 50u" Ni Overall

Plated Au Selective Solder Area

Electrical:

Current Rating :0.5A max. Δ

Contact Resistance:100m Ω max.

Insulation Resistance:1000M Ω min./500VDC

Dielectric Withstanding Voltage:500VAC/1 minute


Operating Temperature:-25°C TO+85°C

Mating Cycles:10,000 Insertions

Usable Memory Card:

Micro SD Card

RECOMMEND PCB LAYOUT: (Unit:mm .X $\pm$ 0.15 .XX $\pm$ 0.05 .XXX $\pm$ 0.02)

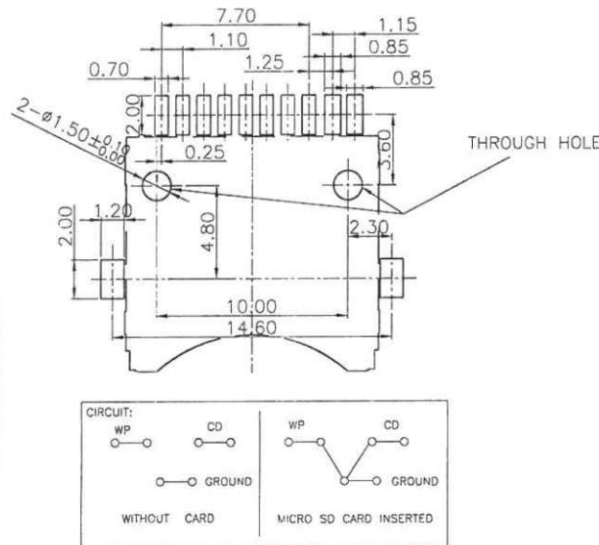

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

X, $\pm$

.X $\pm$

.XX $\pm$

.XXX $\pm$

ANG $\pm$

PPOJECTION $\rightarrow$

照片框

ORDER INFORMATION

TFC-WPBP10C-08-LF

SERIES TFC WPBP10C 08 LF LEADFREE
MYLAR
POST 10.0mm
BOTTOM CONTACT
PUSH PUSH

DESCRIPTION: