

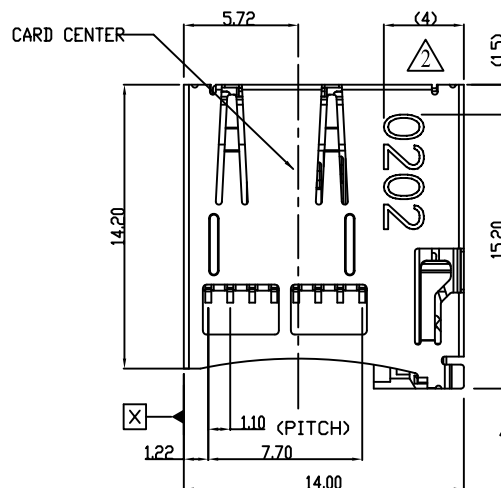






NOTES:  
1. DATE CODE 0202 (YVWD)  
Y: 0 YEAR(2010)  
WW: 20 WEEK(01~52)  
D: 2 DAY(01~07)


2. 0202 WIDE x HIGH(6mm x 2mm)

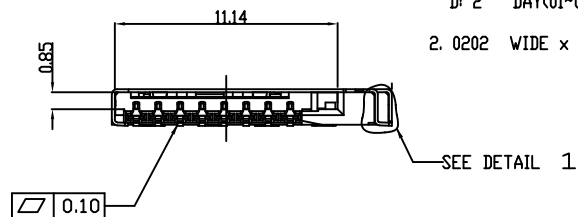

DETAIL 1  
SCALE 15

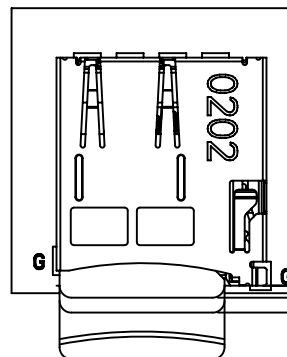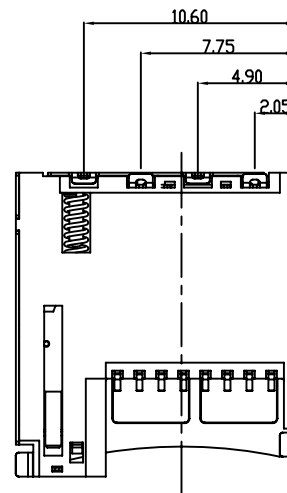

(0.8) CARD PUSH-IN FOR INSERTION  
(1.8) CARD FULLY INSERTED  
(4.9) CARD EJECTED

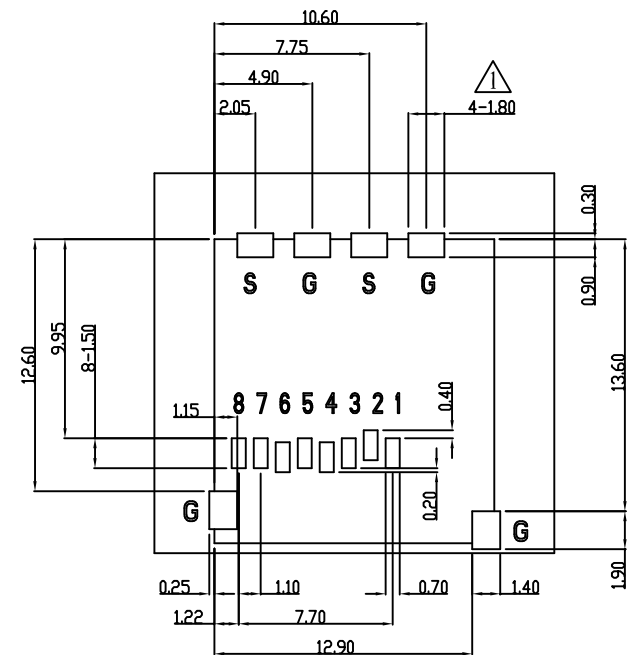

RECOMMEND PC BOARD LAYOUT

| CARD DETECTION SWITCH |                       |
|-----------------------|-----------------------|
| WHEN CARD IS EJECTED  | WHEN CARD IS INSERTED |
| CLOSE                 | OPEN                  |
| S G                   | S G                   |

| ITEM | PART NAME | Q'TY | MATERIAL     |
|------|-----------|------|--------------|
| 1    | BODY      | 1    | LCP+35%GF    |
| 2    | SLIDER    | 1    | LCP+35%GF    |
| 3    | CONTACT   | 8    | C5210R-EH    |
| 4    | SWITCH    | 1    | C2680R-H     |
| 5    | SHELL     | 1    | SUS304R-3/4H |
| 6    | DRAG LINK | 1    | SUS304       |
| 7    | SPRING    | 1    | PIAND WIRE   |

| PIN NUMBER | PIN ASSIGNMENT | PIN NUMBER | PIN ASSIGNMENT |
|------------|----------------|------------|----------------|
| 1          | DAT2           | 6          | VSS            |
| 2          | CD/DAT3        | 7          | DAT0           |
| 3          | CMD            | 8          | DAT1           |
| 4          | VDD            | S          | CARD DETECTION |
| 5          | CLK            | G          | GROUND         |

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1:1

DATE

SIZE A4

PPOJECTION

X, ±  
.X, ±  
.XX, ±  
.XXX, ±  
ANG ±



ORDER INFORMATION

TFC-WPCE12A-08-LF

SERIES TFC LEADFREE  
90°SMT 08WAY  
PUSH PUSH SWITCH CLOSE  
C/LAYOHT EAR 12.6mm

DESCRIPTION: Micro SD Socket Top Mount Push-Push Type