



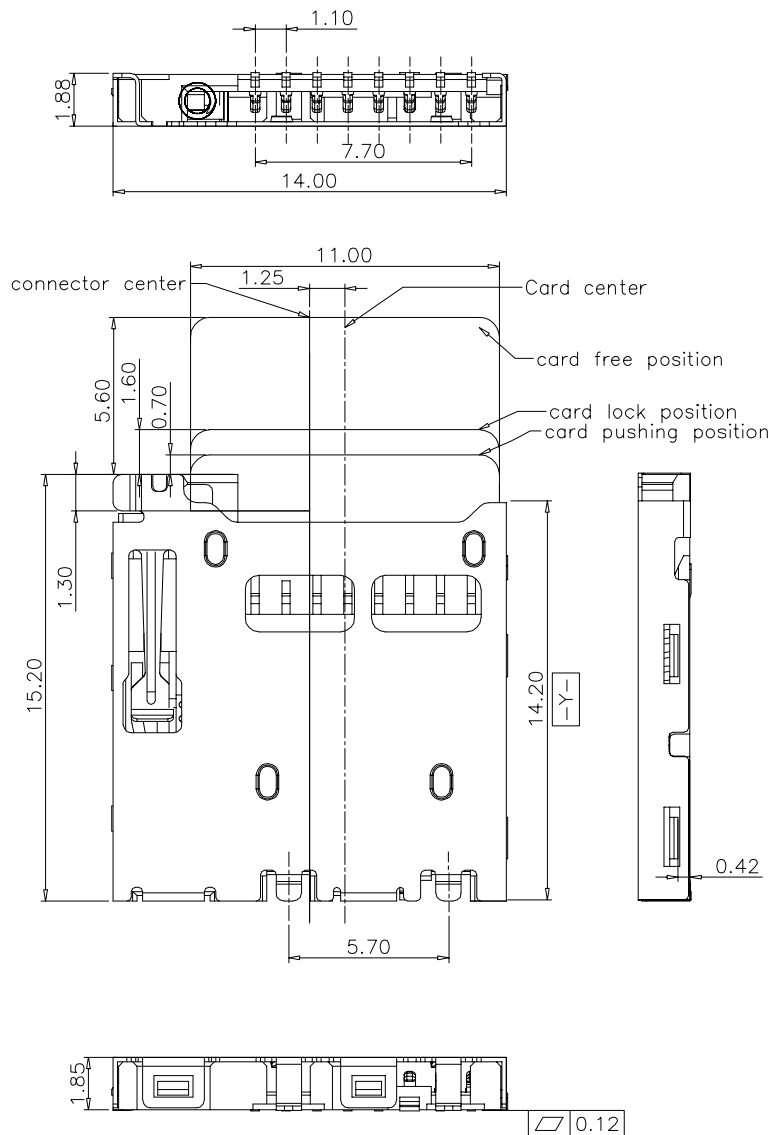

Transflash DEFINITION

| PIN NO. | FUNCTION                     |
|---------|------------------------------|
| 1       | DATA LINE(BIT 2)             |
| 2       | CARD DETECT/DATA LINE(BIT 3) |
| 3       | COMMAND RESPONSE             |
| 4       | SUPPLY VOLTAGE               |
| 5       | CLOCK                        |
| 6       | SUPPLY VOLTAGE GROUND        |
| 7       | DATA LINE(BIT 0)             |
| 8       | DATA LINE(BIT 1)             |

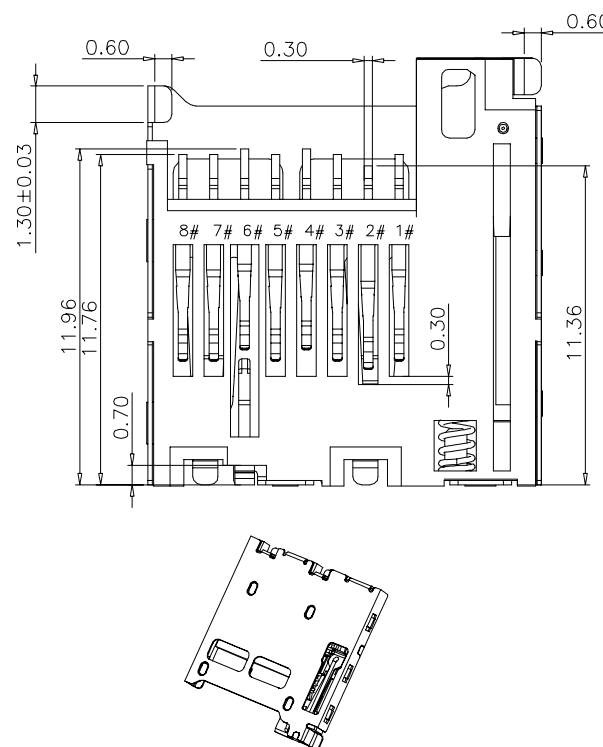

Notes:

1.All Dimensions are in Millimeters.

2.Material:

Housing:LCP Color:black

Contact:Phosphor Bronze.

Tin 160u" at Solder Tail,

Selected Gold on Contact Area Plating.

3.Specification:

3.1.Electrical Characteristics:

3.1.0. Contact Resistance: 100m Max.

3.1.1. Dielectric Withstanding Voltage:  
500VAC Max With 1 Minute

3.1.2. Insulation Resistance:1000 M Min.

3.1.3. Current Rating: 0.5A AC/DC Max.

Rated Voltage : 100 V RMS Min.

3.2.Mechanical Characteristics:

3.2.0. Mating Force: 30N Max.


3.2.1. Unmating Force : 1~30N.

3.2.2. Contact Retation Force:

100g Min. Per Pin.

3.2.3. Operating Temperature: -25°C~+85°C

3.2.4. Storage Temperature:-40°C~+85°C

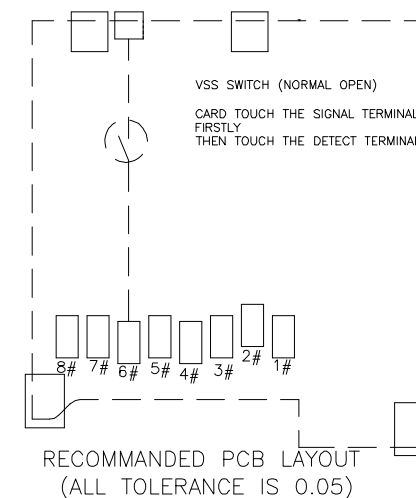

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

X. ±

.X ±

.XX ±

.XXX ±

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

TFC-WPCE12B-08-LF  
SERIES LEADFREE  
90°SMT 08WAY  
C/LAYOHT SWITCH OPEN  
PUSH PUSH EAR 12.6mm

DESCRIPTION: