
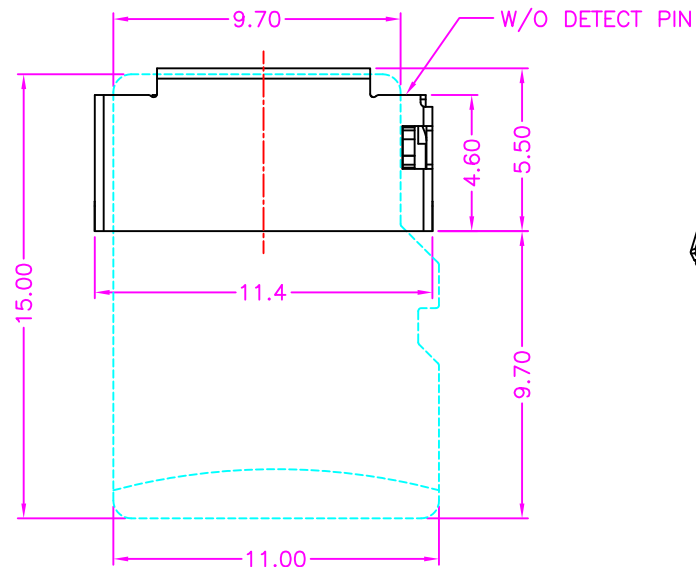
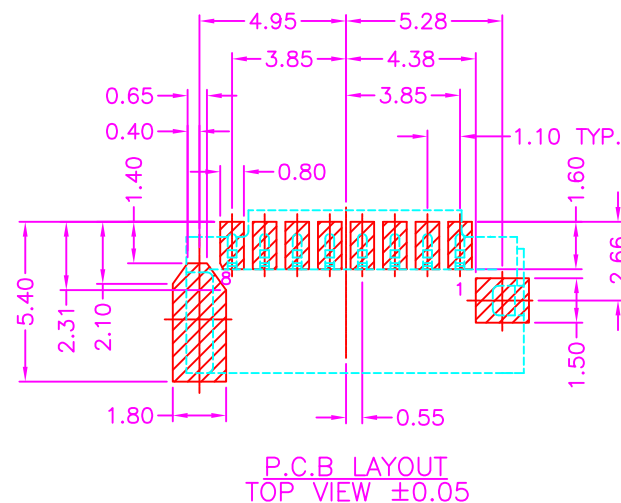



MATERIALS

HOUSING: LCP (UL 94V-0), BLACK
SHELL: STAINLESS STEEL, NICKEL PLATING
TERMINAL: COPPER ALLOY, GOLD PLATED

SPECIFICATION

CURRENT RATING: 0.5 AMP MAX
DIELECTRIC WITHSTANDING: 500V AC FOR ONE MINUTE
CONTACT RESISTANCE: 80m OHMS MAX
INSULATION RESISTANCE: 1000M OHMS MIN AT DC 500V
OPERATION TEMPERATURE: -40°C~+85°C

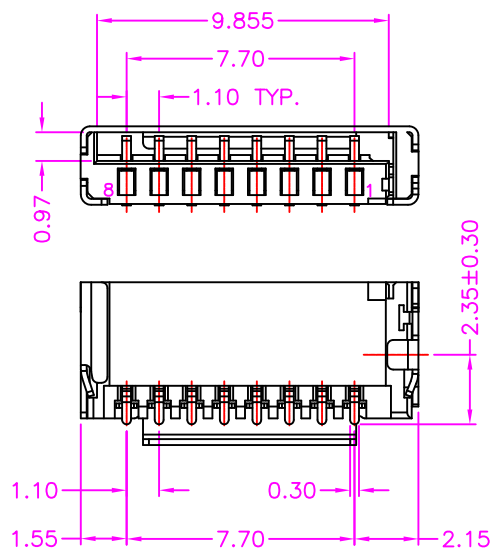

Pin	NAME
1	DAT 2
2	CD/DAT 3
3	CMD
4	VDD
5	CLK
6	VSS
7	DAT0
8	DAT1

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ± 0.40
X. ± 0.30
.XX ± 0.20
.XXX ± 0.10
ANG ±


PPOJECTION

照片框

ORDER INFORMATION

TFC-WXBE10H26R-08-LF
SERIES TFC W X B E 10 H 26 R 08 L F
LEADFREE
08 WAY
REEL
HIGH 2.65mm
EAR 1.0mm
BOTTOM CONTACT
90°SMT
NON PUSH

DESCRIPTION: MICRO SD (T-FLASH), PCB MOUNT, SMT, METAL SHIELD, H=2.65mm, FEMALE

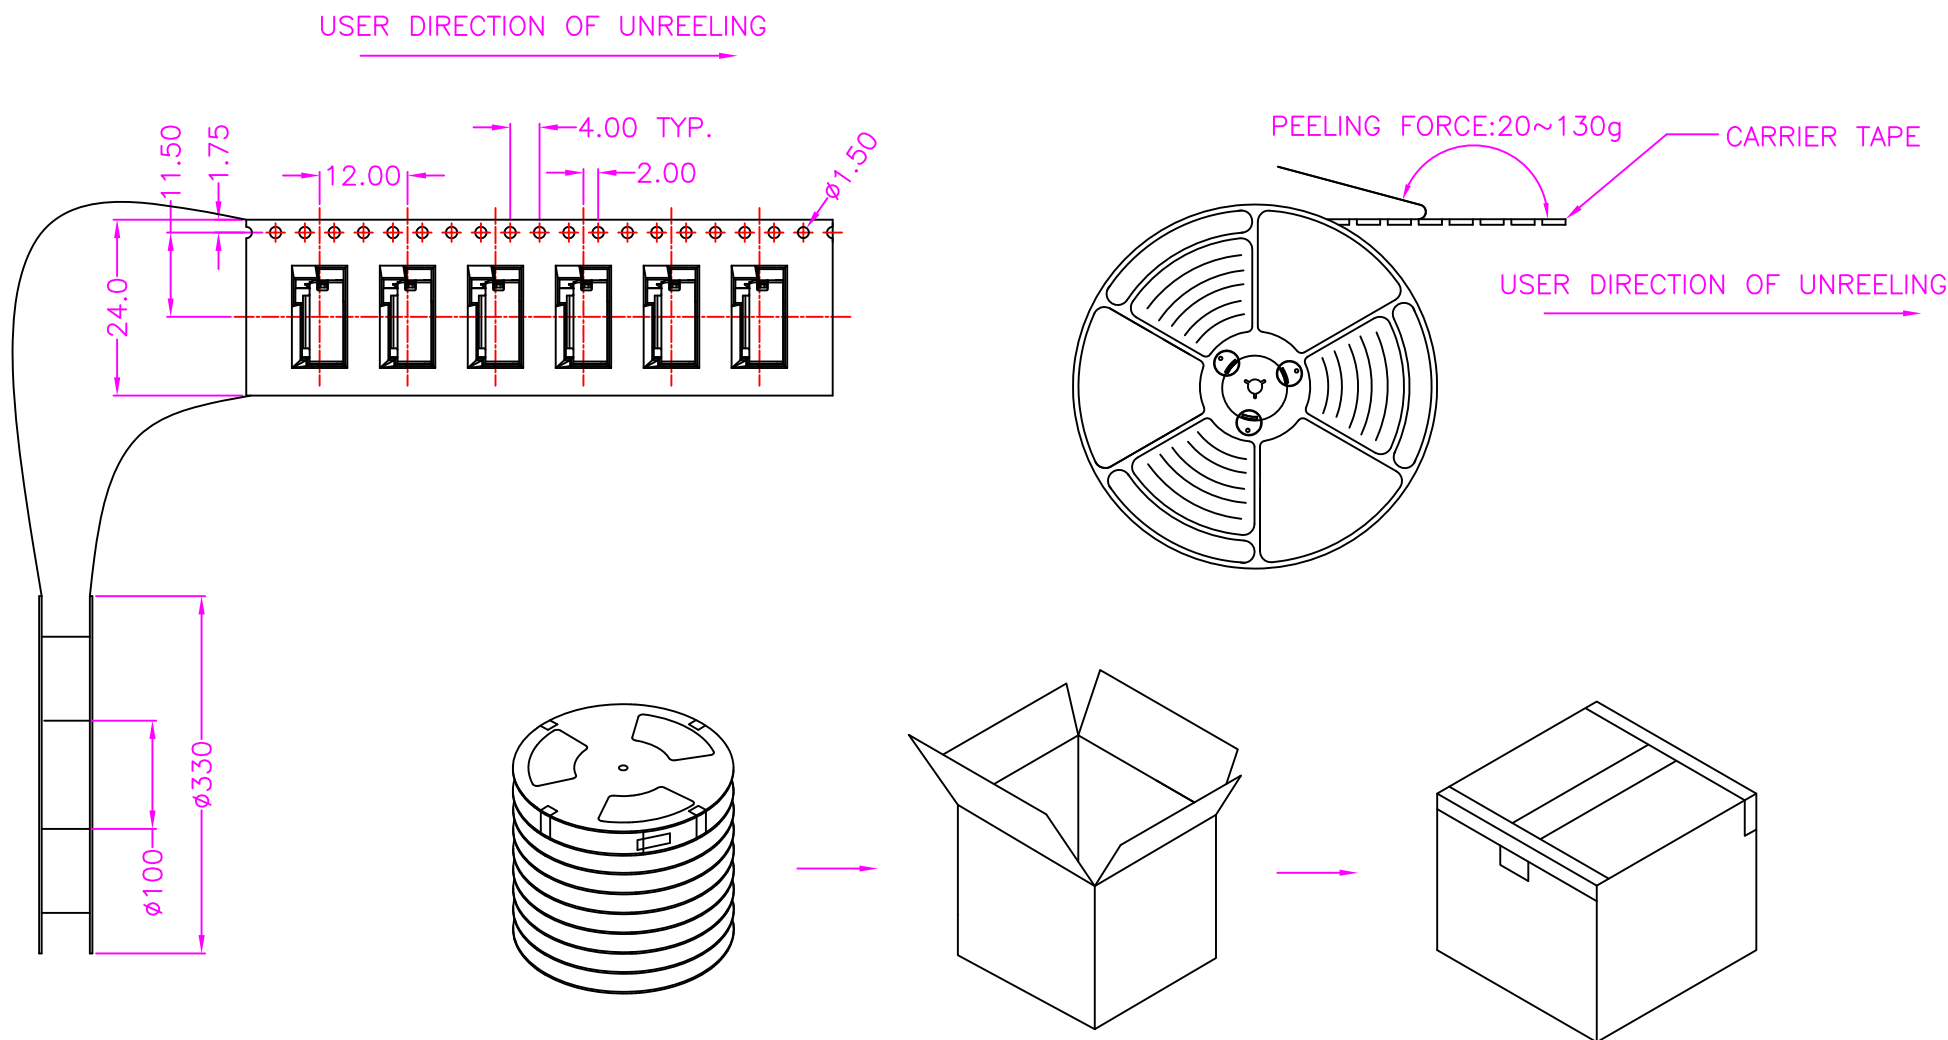

NOTE: 1500PCS/ REEL, 16500PCS/ 11 REEL/ CARTON

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. ± 0.40

.X ± 0.30

.XX ± 0.20

.XXX ± 0.10

ANG $\pm$

PPOJECTION

照片框

ORDER INFORMATION

TFC-WXBE10H26R-08-LF

SERIES T T LEADFREE

90°SMT T T 08 WAY

NON PUSH T T REEL

HIGH 2.65mm

EAR 1.0mm

BOTTOM CONTACT

DESCRIPTION: MICRO SD (T-FLASH), PCB MOUNT, SMT, METAL SHIELD, H=2.65mm, FEMALE