
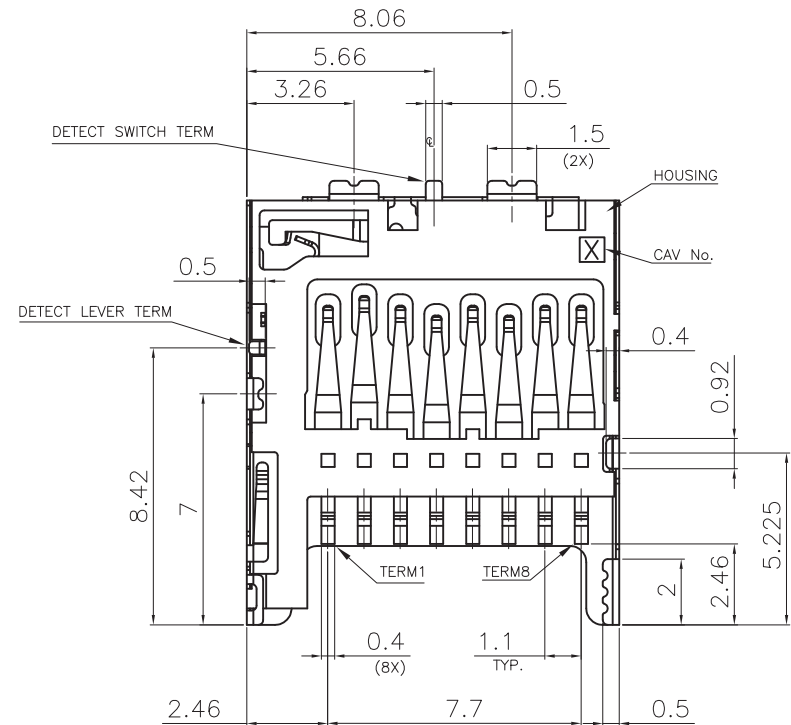


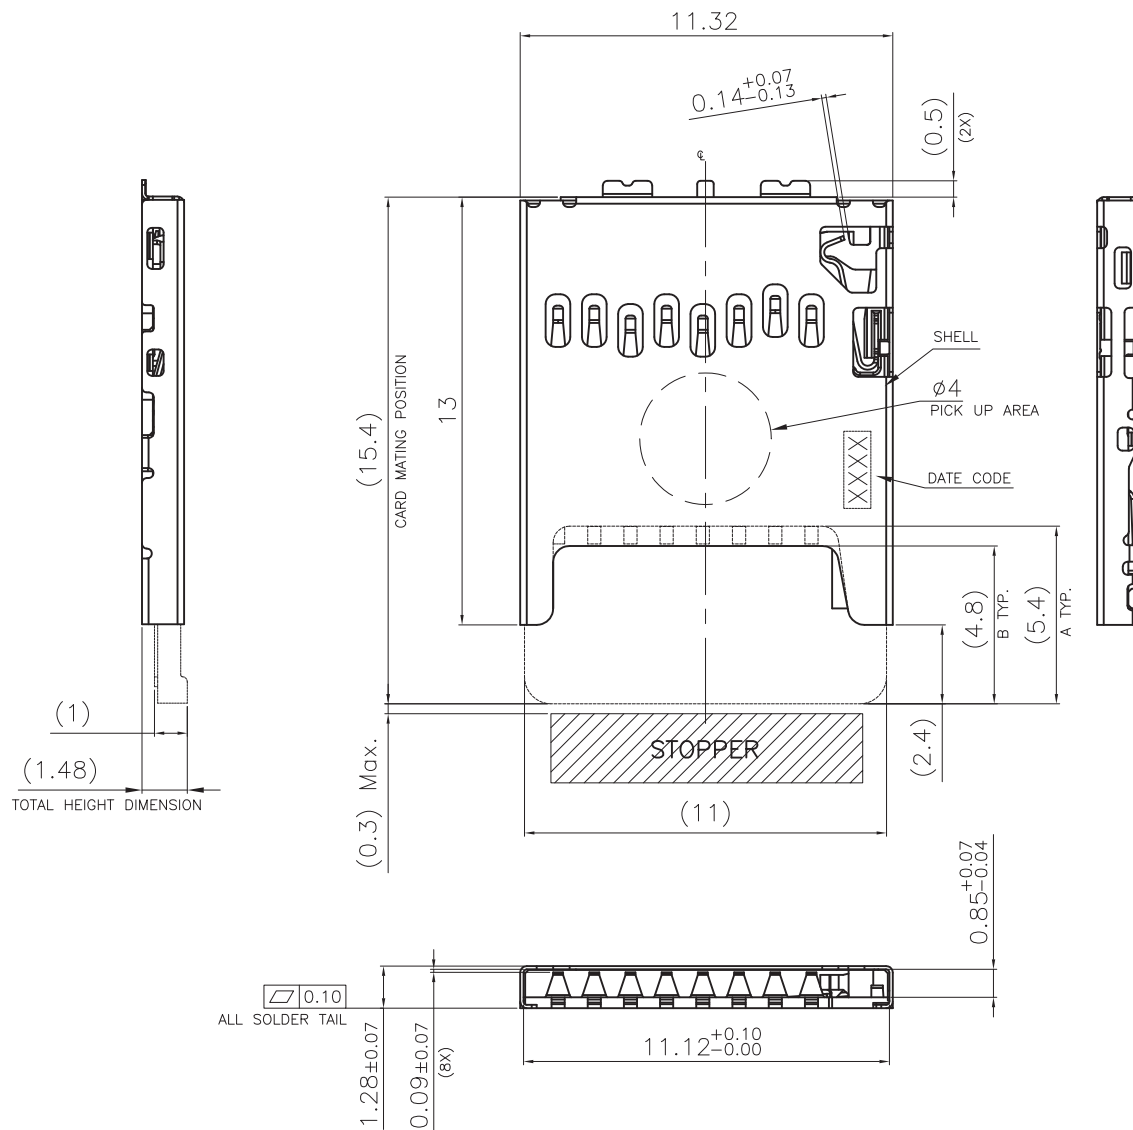

DETECT SWITCH

CARD INSERTING POSITION	CLOSE
NO CARD	OPEN

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X, ±
.X ± 0.20
.XX ± 0.10
.XXX ± 0.05
ANG ± 1°

PPOJECTION


照片框

ORDER INFORMATION

TFC-WXCE11B-08-LF

SERIES 90°SMT
LEADFREE
08WAY
SWITCH OPEN
EAR 11.3mm
C/LAYOHT
NON PUSH PUSH

DESCRIPTION: MICRO SD CONN. PUSH/PULL H=1.28mm WITH DETECT SWITCH

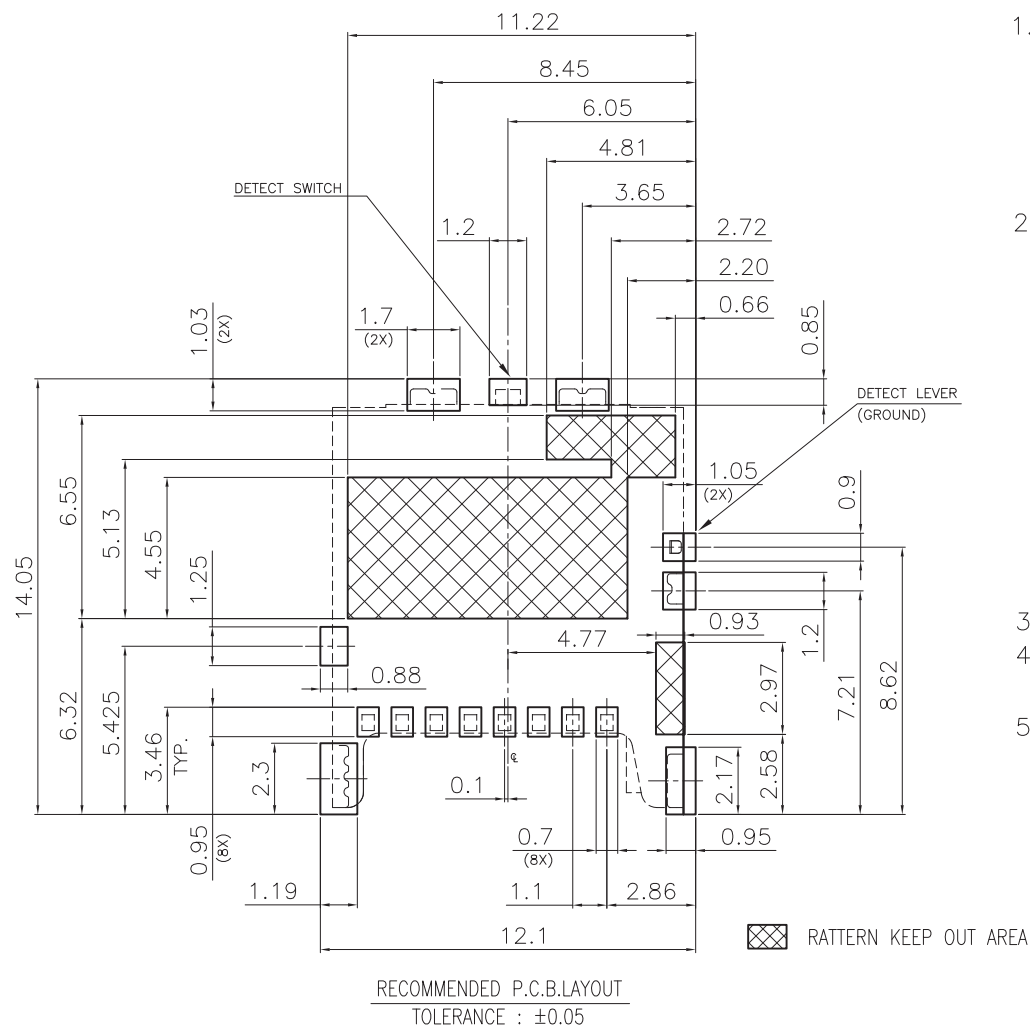

1.MATERIAL:

- 1.1 HOUSING : LCP, UL94 V-0, COLOR: BLACK
- 1.2 TERMINAL : COPPER ALLOY, T=0.12mm
- 1.3 SHELL : STAINLESS STEEL, T=0.10mm
- 1.4 DETECT LEVER TERMINAL : COPPER ALLOY, T=0.12mm
- 1.5 DETECT SWITCH TERMINAL : COPPER ALLOY, T=0.12mm

2.FINISH:

2.1 TERMINAL:

OPTION GOLD PLATING ON CONTACT AREA,
GOLD FLASH 1~3u" PLATING ON SOLDER TAIL,
NICKEL 40u" MIN. UNDERPLATING OVERALL.

2.2 SHELL:

NICKEL PLATING OVERALL.
GOLD FLASH 1~3u" PLATING ON SOLDER TAIL

2.3 DETECT LEVER TERMINAL & DETECT SWITCH TERMINAL:


GOLD PLATING 8u" ON CONTACT AREA,
GOLD FLASH 1~3u" PLATING ON SOLDER TAIL,
NICKEL 40u" MIN. UNDERPLATING OVERALL.

3. RoHS & GP COMPLIANT

4. CLEARANCE BETWEEN THE STOPPER AND MICROSD CARD: PLEASE ADJUST TO 0.3MM OR LESS.

5. (RECOMMENDED METAL MASK):

THICKNESS IN CASE OF STENCIL IS 0.10MM OPEN RATIO IS 100%

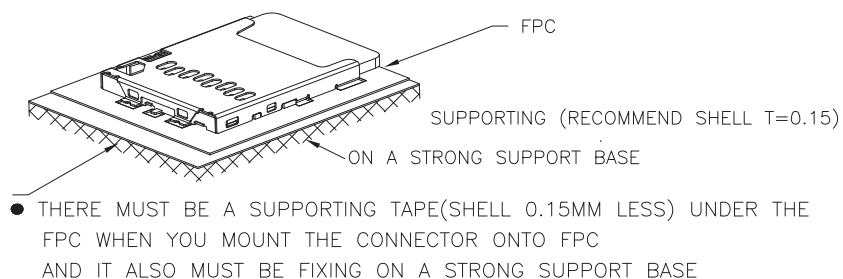

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X, $\pm$
.X $\pm$ 0.20
.XX $\pm$ 0.10
.XXX $\pm$ 0.05
ANG $\pm$ 1°

PPOJECTION

照片框

ORDER INFORMATION

TFC-WXCE11B-08-LF
SERIES | | | | LEADFREE
90°SMT | | | | 08WAY
C/LAYOHT | | | | SWITCH OPEN
NON PUSH | | | | EAR 11.3mm

DESCRIPTION: MICRO SD CONN. PUSH/PULL H=1.28mm WITH DETECT SWITCH