



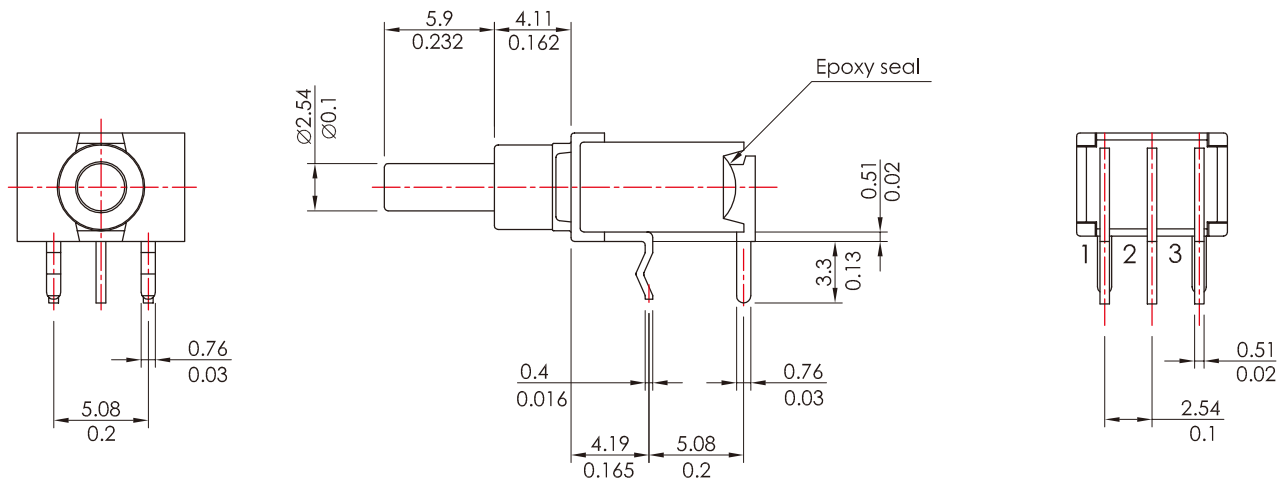

## SWITCH FUNCTION

|             | POS.1 | POS.2 |
|-------------|-------|-------|
| Model No.   |       |       |
| 8AS8        | ON    | (ON)  |
| Term. Comm. | 2-1   | 2-3   |
| Schematic   |       |       |

## P.C. MOUNTING



## SPECIFICATION

**Rating:** 0.4VA Max @ 20V Max (AC or DC).

**Mechanical life:** 50,000 make-and-break cycles at full load.

**Contact resistance:** 20mΩ Max. initial @ 2-4V DC.

100mA for both silver and gold plated contacts.

**Insulation resistance:** 1,000MΩ Min.

**Dielectric strength:** 1,000V RMS @sea level.

**Operating temperature:** -30°C ~ +85°C.

**Soldering temperature:** 250°C Max for 3 Sec.

**Soldering time:** 1 time only.

## MATERIAL

**Case & bushing:** Glass filled Nylon 66, flame retardant, heat stabilized (UL94V-0).

**Plunger:** Thenoplastic Polyester (UL94V-0), with internal O-ring seal.

**Switch support:** Brass or steel electroplated.

**Contact:** Gold plated Copper alloy.

照片框

## RoHS Compliant

## TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ±  
.X ±  
.XX ±  
.XXX ±  
ANG ±

## ORDER INFORMATION

TGSW26-RM059-1X03-LF

SERIES

5.9mm

METAL

DIP 90°

03 WAY

LEADFREE

DESCRIPTION: